

This is  
smarter  
cooking.

See how GE Profile  
is making kitchens  
smarter and  
lives simpler.

PG. 2



Appliances shown: French-door refrigerator—PVD28BYNFS (pg. 18); Kitchen Hub—UVH13013MTS (pg. 105); Induction range—PHS93XYPFS (pg. 110); Dishwasher—PDP715SYNFS (pg. 150)







Appliances shown: French-door refrigerator—PYD22KBLTS (pg. 16); Kitchen Hub—UVH13013MTS (pg. 105); Induction range—PHS93XYPFS (pg. 110); Dishwasher—PDP715SBNTS (pg. 150)



## A smarter kitchen

### Who will love it

- GE Profile appliances are designed to make daily life simpler for those who:
- Crave Smart Home technology and cutting-edge features in every appliance
  - Want updates that will upgrade their appliances over time
  - Expect technology to help them achieve more every day





Appliances shown: French-door refrigerator—GYE22GYNFS (pg. 17); Free-standing gas range—JGBS86SPSS (pg. 128); Over-the-range microwave oven—JVM6175YKFS (pg. 138); Dishwasher—GDP665SYNFS (pg. 151)

### WHO WILL LOVE IT

GE Appliances products are designed, built and tested for real life, which make them perfect for owners who:

- See their kitchen as the heart of their home and demand durability above all
- Prefer a modern twist on traditional appliances
- Appreciate time-tested features that get the job done



# THE TRUE LEADER IN PREMIUM FINISHES

When it comes to fingerprint resistant premium finishes, GE Appliances is an industry leader with more choices for more owners.

Finishes are available across all kitchen products.





# Smart, not complicated.

GE Profile™ and GE Appliances are leading the way in giving owners new ways to simplify their lives with more than 500 smart appliances across all product categories. And with the all new SmartHQ app, controlling them has never been easier.



Anywhere control

Monitor and interact with GE Profile smart appliances from any location.

Use your voice

Operate GE Profile smart appliances with voice commands for hands-free convenience.


Everything in one place

Control every smart appliance right from a smart device with SmartHQ, the easy-to-use app that does everything from remote preheat for owners to order management for contractors.

Always up-to-date

Receive software updates that enhance performance and offer exciting new features.

GE Appliances smart home capabilities work with a variety of partners:

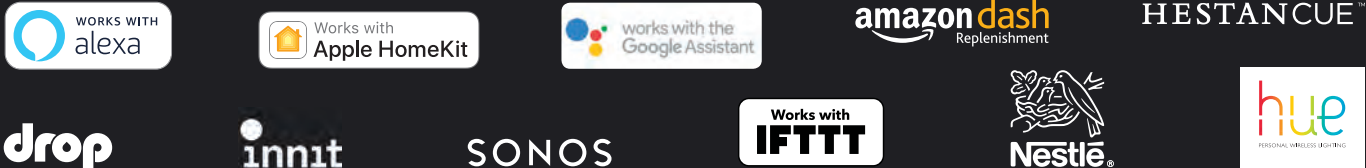

Amazon, Echo, dash replenishment, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

## TABLE OF CONTENTS

	Page	Specifications & Installation
<b>REFRIGERATION</b>		
Bottom-Freezer Refrigerators	14-23	228-233
Side-By-Side Refrigerators	24-31	234-237
Top-Freezer Refrigerators	32-41	238-242
Water Filters	42-44	322-324
Refrigeration Parts & Accessories	45	
Compact Refrigerators, Wine & Beverage Centers	46-51	243-244
Ice Makers	49	244
Freezers	52-57	245
<b>COOKING</b>		
Wall Ovens	62-71	246-255
Warming Drawers	71	256
Advantium®	72-73	257
Built-In Microwave Ovens	74-75	258-261
Cooktops	76-93	262-268
Ventilation	94-103	269-273
Kitchen Hub	104-105	274
Drop-In Ranges	106-107	275-276
Slide-In Ranges	108-117	277-280
Free-Standing Electric Ranges	118-125	281-285
Free-Standing Gas Ranges	126-133	286-289
Over-The-Range Microwave Ovens	134-139	290-293
	75, 87, 94, 102-104, 118-119, 126-127, 135, 141	
Cooking Parts & Accessories		
Countertop Microwave Ovens	140-143	294-295
<b>DISHWASHERS</b>		
Built-In Dishwashers	148-156	296-302
Spacemaker® Built-In Dishwashers	156-157	302
Portable Dishwashers & Compactors	157	303-305
Disposers	158-159	305
Dishwasher & Compactor Parts & Accessories	160-161	
<b>CLOTHES CARE</b>		
Front Load Washers & Dryers	166-171	305-311
Top Load Washers & Dryers	172-177	312-315
Stackable/Portable Washers/Dryers	178	316
Unitized Washers/Dryers	179	317
Clothes Care Parts & Accessories	180-185	
Dryer Exhausting & Installation Information		318-319
<b>WATER SYSTEMS</b>		
Electric Water Heaters	188-191	320
Flexible Capacity Electronic Water Heaters	192-193	321
Geospring Solar Water Heaters	194-195	321
Softening Systems & Filtration Systems	196-201	322-324
<b>CONSUMER COMFORT PRODUCTS</b>		
Window Room Air Conditioners	204-208	325
Portable Room Air Conditioners	209-210	326
Dehumidifiers	211	326
Built-In Room Air Conditioners	212-213	327-329
Zoneline® Packaged Terminal Air Conditioners	214-217	330-331
Zoneline Single Packaged Vertical Units	218-219	329
Zoneline Vertical Parts & Accessories	220	
Zoneline Thermostats	221	
<b>PRODUCT SPECIFICATIONS &amp; INSTALLATIONS</b>		
Cleaning Supplies and Accessories	222-223	
Warranty Information	224-226	
ADA Requirements/UFAS Standards	227	
Nomenclatures	334-336	



GE Appliances helps you conserve energy and save money. We have been an ENERGY STAR® Partner since 2001. We are committed to creating energy-efficient, high-performance household appliances.

As an ENERGY STAR partner, GE Appliances has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an ENERGY STAR certified appliance, read important information about its estimated annual energy consumption or energy-efficiency rating available from your retailer, [geappliances.com](http://geappliances.com) or [energystar.gov](http://energystar.gov).



Compliant with the Americans with Disabilities Act



Compliant with the Uniform Federal Accessibility Standards



**®** Chef Connect—For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's or hood's surface light and vent.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.*



WiFi Connect appliances with remote monitoring and enhanced features are indicated by this icon.



This mark indicates that a product has voice assistance capabilities and works with devices powered by Amazon Alexa and Google Assistant.



Appliances with this icon are Made in America and contain 70 to 90% U.S. content. Product content details at [GEAppliances.com/USA](http://GEAppliances.com/USA)



GE Appliances and the SmartHQ app use industry-best practices for IoT cybersecurity and consumer data protection.





REFRIGERATION



# OPEN THE DOOR TO OPTIONS

Whether it's the bold technology inside GE Profile™ or the unwavering durability of a GE Appliances model, limitless combinations of features and styles give every owner a refrigerator that's theirs.



PYD22KBLTS—See pg. 16.



PSB42YSNSS—See pg. 31.



PVD28BYNFS—See pg. 18.



GYE22GYNFS—See pg. 17.



GTS16DTNRWW—See pg. 41.



GLE12HSPSS—See pg. 23.



GNE25JMKES—See pg. 22.



FUF17DLRWW—See pg. 54.



GWS04HAESS—See pg. 50.



FCM16DLWW—See pg. 56.





# FRENCH-DOOR & BOTTOM-FREEZER REFRIGERATORS

## FEATURE HIGHLIGHTS



### KEURIG® K-CUP® BREWING SYSTEM

Enjoy the unexpected convenience of hot, single-serve brewing at your fridge.




### HANDS-FREE AUTOFILL

Walk away without worrying as the dispenser automatically fills your container with filtered water.



### SPACE-SAVING ICEMAKER

Have more usable storage space thanks to an icemaker with integrated bins, located on the door.



### HOT WATER SCHEDULING VIA SmartHQ™

Have hot water waiting for you any time of day. Just schedule hot water through SmartHQ, and enjoy ultimate convenience.



### ADJUSTABLE-TEMP DRAWER WITH BIN CADDY

Enjoy more storage flexibility and better organization with a removable bin caddy that's perfect for storing canned drinks and more.




### DOOR IN DOOR

Easily store and access your favorites, including taller items like wine bottles, with an innovative door in door design and convenient rotating bin.



### TWINCHILL™ EVAPORATORS

Keep foods fresh with separate climates in the fresh-food and freezer sections that help maintain temperature and humidity levels.



### FULL-WIDTH, ELECTRONIC TEMP-CONTROLLED DRAWER

Maintain the optimal temperatures for your favorite foods with three accurate settings.



### SECOND ICEMAKER OPTION

Always have extra ice on hand with an optional second icemaker in the freezer (sold separately).



FRENCH-DOOR, COUNTER-DEPTH REFRIGERATORS



- PYE22PYN**  
**GE PROFILE™ 22.1 CU. FT. SMART REFRIGERATOR**
- **Keurig® K-Cup® brewing system**
  - **Hot Water Scheduling via SmartHQ™**
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Advanced water filtration uses RPWFE replacement filter
  - TwinChill™ evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - Built-In WiFi powered by SmartHQ
  - Drop-down tray
  - Turbo Cool and Turbo Freeze settings
- Fingerprint Resistant Stainless – PYE22PYNFS



Model shown in Slate

- PWE23KMK**  
**GE PROFILE 23.1 CU. FT. SMART REFRIGERATOR**
- **Internal water dispenser**
  - Factory-installed icemaker
  - **Full-width, electronic temperature-controlled drawer with LED lights**
  - TwinChill evaporators
  - In-the-door controls with actual-temperature display
  - **Drop-down tray**
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - **Quick Space shelf**
  - WiFi optional\*
  - Turbo Cool and Turbo Freeze settings
- Fingerprint Resistant Stainless – PWE23KYNFS  
■ Slate – PWE23KMKES  
■ Black Slate – PWE23KELDS



- PYD22KYN**  
**GE PROFILE 22.1 CU. FT. SMART REFRIGERATOR**
- **Door in Door**
  - Hands-free Autofill
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Second icemaker option (IM5D kit sold separately)
  - TwinChill evaporators
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - Quick Space shelf
  - WiFi optional\*
  - Drop-down tray
- Fingerprint Resistant Stainless – PYD22KYNFS  
■ Black Stainless – PYD22KBLTS



- GYE22GYN**  
**GE 22.1 CU. FT. SMART REFRIGERATOR**
- Fits 36" openings
  - Fingerprint resistant stainless
  - Space-saving icemaker
  - Second icemaker option (IM5D kit sold separately)
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - TwinChill evaporators
  - WiFi optional\*
  - 2 humidity-controlled drawers and full-width drawer with LED light
- Fingerprint Resistant Stainless – GYE22GYNFS  
■ Slate – GYE22GMNES  
■ Black Slate – PWE23KELDS



Model shown in Slate

- PYE22KMK**  
**GE PROFILE 22.1 CU. FT. SMART REFRIGERATOR**
- **Hands-free Autofill**
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Second icemaker option (IM5D kit sold separately)
  - TwinChill evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - WiFi optional\*
  - Drop-down tray
  - Turbo Cool and Turbo Freeze settings
  - Advanced water filtration uses RPWFE replacement filter
- Fingerprint Resistant Stainless – PYE22KYNFS  
■ Black Stainless – PYE22KBLTS  
■ Slate – PYE22KMKES  
■ Black Slate – PYE22KELDS



- GWE23GYN**  
**GE 23.1 CU. FT. SMART REFRIGERATOR**
- Fingerprint resistant stainless
  - TwinChill evaporators
  - Showcase LED lighting
  - 2 humidity-controlled drawers and full-width drawer with LED light
  - Factory-installed icemaker with water filtration system
  - Advanced water filtration uses RPWFE replacement filter
  - WiFi optional\*
- Fingerprint Resistant Stainless – GWE23GYNFS  
■ Slate – GWE23GMNES  
■ Black Slate – GWE23GENDS



Complete features and specifications on pages 228–231.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*SmartHQ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.



FRENCH-DOOR, COUNTER-DEPTH REFRIGERATORS



- GYE18JSL**  
**GE 17.5 CU. FT. SMART REFRIGERATOR**
- Fits 33" openings
  - **External ice and water dispenser with temperature display**
  - LED lighting
  - 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer
  - Turbo Cool setting
  - Quick Space shelf
  - WiFi optional\*
  - Advanced water filtration uses XWFE replacement filter
- Stainless - GYE18JSLSS  
■ Slate - GYE18JMLES  
■ Black Slate - GYE18JEMDS



- PFE28PYN**  
**GE PROFILE 27.7 CU. FT. SMART REFRIGERATOR**
- Fingerprint resistant stainless
  - **Keurig® K-Cup® brewing system**
  - **Hot Water Scheduling via SmartHQ**
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Advanced water filtration uses RPWFE replacement filter
  - TwinChill evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - **Built-In WiFi powered by SmartHQ**
  - Drop-down tray
  - Turbo Cool and Turbo Freeze settings
- Fingerprint Resistant Stainless - PFE28PYNFS



- GWE19JSL**  
**GE PROFILE 18.6 CU. FT. SMART REFRIGERATOR**
- Fits 33" openings
  - **Internal water dispenser**
  - Factory-installed icemaker with water filtration system
  - LED lighting
  - 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer
  - Turbo Cool setting
  - Quick Space shelf
  - WiFi optional\*
  - Door alarm
  - Upfront temperature controls with actual-temperature display
  - Advanced water filtration uses XWFE replacement filter
- Stainless - GWE19JSLSS  
■ Slate - GWE19JMLES  
■ High-gloss White - GWE19JGLWW  
■ High-gloss Black - GWE19JGLBB



Model shown in Black Stainless

- PFD28KBL**  
**GE PROFILE 27.7 CU. FT. SMART REFRIGERATOR**
- **Door in Door**
  - Hands-free Autofill
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Second icemaker option (IM5D kit sold separately)
  - TwinChill evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - WiFi optional\*
  - Drop-down tray
  - Turbo Cool and Turbo Freeze settings
  - Advanced water filtration uses RPWFE replacement filter
- Fingerprint Resistant Stainless - PFD28KYNFS  
■ Black Stainless - PFD28KBLTS



FRENCH-DOOR REFRIGERATORS



- PVD28BYN**  
**GE PROFILE™ 27.9 CU. FT. SMART REFRIGERATOR**
- Fingerprint resistant stainless
  - **Hands-free Autofill**
  - **LED light wall**
  - **Adjustable-temperature drawer with bin caddy**
  - **Door in Door**
  - **Soft-close drawers**
  - Built-in WiFi powered by SmartHQ™
  - TwinChill™ evaporators
- Fingerprint Resistant Stainless - PVD28BYNFS (Winter 2020)



- PFE28KYN**  
**GE PROFILE 27.7 CU. FT. SMART REFRIGERATOR**
- Fingerprint resistant stainless
  - **Hands-free Autofill**
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Second icemaker option (IM5D kit sold separately)
  - TwinChill evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - WiFi optional\*
  - **Drop-down tray**
  - Turbo Cool and Turbo Freeze settings
  - Advanced water filtration uses RPWFE replacement filter
- Fingerprint Resistant Stainless - PFE28KYNFS  
■ Black Stainless - PFE28KBLTS  
■ Slate - PFE28KMKEs



Complete features and specifications on pages 228-231. See page 227 for Accessibility Requirements. **Bold = feature upgrade from previous model.** For definitions of logos, see page 9.

\*SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.



FRENCH-DOOR REFRIGERATORS



Model shown in Black Slate



- GFD28GEL**  
**GE 27.7 CU. FT. SMART REFRIGERATOR**
- **Door in Door**
  - Second icemaker option (IM5D kit sold separately)
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - TwinChill™ evaporators
  - 2 humidity-controlled drawers and 1 full-width drawer with LED light
  - Turbo Cool and Turbo Freeze settings
  - Space-saving icemaker
  - WiFi optional\*
- Fingerprint Resistant Stainless – GFD28GYNFS  
■ Slate – GFD28GMLES  
■ Black Slate – GFD28GELDS



- GFE28GYN\***  
**GE 27.7 CU. FT. SMART REFRIGERATOR**
- Fingerprint resistant stainless
  - Space-saving icemaker
  - **Second icemaker option** (IM5D kit sold separately)
  - Advanced water filtration uses RPWFE replacement filter
  - **Showcase LED lighting**
  - **TwinChill evaporators**
  - **2 humidity-controlled drawers and full-width drawer with LED light**
  - WiFi optional\*
- Fingerprint Resistant Stainless – GFE28GYNFS  
■ Slate – GFE28GMKES  
■ Black Slate – GFE28GELDS



- GFE26JYM**  
**GE 25.6 CU. FT. SMART REFRIGERATOR**
- Fingerprint resistant stainless
  - Space-saving icemaker
  - LED lighting
  - **External controls with actual-temperature display, child lock and door alarm**
  - Spillproof shelves
  - 2 humidity-controlled drawers and full-width drawer
  - Quick Space shelf
  - WiFi optional\*
- Fingerprint Resistant Stainless – GFE26JYMFS  
■ Slate – GFE26JMMES  
■ Black Slate – GFE26JEMDS  
■ White – GFE26JGMWW (Winter 2020)  
■ Black – GFE26JGMBB (Winter 2020)



Model shown in Slate



- GNE29GMK**  
**GE 27.8 CU. FT. REFRIGERATOR**
- TwinChill evaporators
  - Showcase LED lighting
  - 2 humidity-controlled drawers and full-width drawer
  - Factory-installed icemaker with water filtration system
  - Advanced water filtration uses RPWFE replacement filter
  - **Internal controls with actual-temperature display**
  - Door alarm
  - Two-level freezer storage baskets
  - WiFi optional\*
- Fingerprint Resistant Stainless – GNE29GYNFS  
■ Slate – GNE29GMKES



- GNE27JYM**  
**GE 27.0 CU. FT. REFRIGERATOR**
- Fingerprint resistant stainless
  - **Internal water dispenser**
  - Factory-installed icemaker with water filtration system
  - LED lighting
  - Spillproof shelves
  - 2 humidity-controlled drawers and full-width drawer
  - Quick Space shelf
  - WiFi optional\*
- Fingerprint Resistant Stainless – GNE27JYMFS  
■ Slate – GNE27JMMES  
■ White – GNE27JGMWW  
■ Black – GNE27JGMBB



- GNE27EYM**  
**GE 27.0 CU. FT. REFRIGERATOR**
- Fingerprint resistant stainless
  - Factory-installed icemaker with water filtration system
  - LED lighting
  - Spillproof shelves
  - 2 humidity-controlled drawers
  - Quick Space shelf
  - Turbo Cool and Turbo Freeze settings
  - WiFi optional\*
- Fingerprint Resistant Stainless – GNE27EYMFS



Complete features and specifications on pages 228-231.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*SmarthQ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.



FRENCH-DOOR REFRIGERATORS



**GFE24JSK**  
**GE 23.7 CU. FT. SMART REFRIGERATOR**

- Fits 33" openings
- **External ice and water dispenser with temperature display**
- LED lighting
- 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer

- Advanced water filtration uses XWFE replacement filter
- Turbo Cool setting
- Quick Space shelf
- WiFi optional\*
- Door alarm

Stainless - GFE24JSKSS

Slate - GFE24JMKES

High-gloss White - GFE24JGKWW

High-gloss Black - GFE24JGKBB



**GNE25JMK**  
**GE 24.7 CU. FT. SMART REFRIGERATOR**

- Fits 33" openings
- **Internal water dispenser**
- LED lighting
- Factory-installed icemaker
- 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer

- Turbo Cool setting
- **Quick Space shelf**
- WiFi optional\*
- Door alarm
- Advanced water filtration uses XWFE replacement filter

Stainless - GNE25JSKSS

Slate - GNE25JMKES

High-gloss White - GNE25JGKWW

High-gloss Black - GNE25JGKBB

Model shown in Slate



**GNE21FSK**  
**GE 20.8 CU. FT. SMART REFRIGERATOR**

- Fits 30" openings
- LED lighting
- **2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer**
- Factory-installed icemaker
- Advanced water filtration uses XWFE replacement filter

- Turbo Cool setting
- WiFi optional\*
- Door alarm
- Upfront temperature controls with actual-temperature display

Stainless - GNE21FSKSS

Slate - GNE21FMKES

BOTTOM-FREEZER REFRIGERATORS



**GDE25ESK**  
**GE 24.8 CU. FT. SMART REFRIGERATOR**

- Fits 33" openings
- LED lighting
- **Sliding snack drawer**
- **Factory-installed icemaker**
- **Advanced water filtration uses XWFE replacement filter**
- 1 clear snack drawer and 2 humidity-controlled drawers

- **Turbo Cool setting**
- **Door alarm**
- WiFi optional\*
- **Upfront temperature controls with actual-temperature display**

Stainless - GDE25ESKSS

**GDE21ESK**  
Similar to GDE25ESK, except 21.0 cu. ft. capacity.

Stainless - GDE21ESKSS

Slate - GDE21EMKES

High-gloss White - GDE21EGKWW

High-gloss Black - GDE21EGKBB



**GBE21DGK**  
**GE 21.0 CU. FT. REFRIGERATOR**

- Fits 30" openings
- LED lighting
- Equipped for optional icemaker
- Adjustable glass shelves
- 2 clear drawers

Stainless - GBE21DSKSS

High-gloss White - GBE21DGKWW

High-gloss Black - GBE21DGKBB

Model shown in High-gloss White

BOTTOM-FREEZER, COUNTER-DEPTH REFRIGERATOR



**GLE12HSP**  
**GE 11.9 CU. FT. REFRIGERATOR**

- Fits 24" openings
- TempSelectZone crisper
- Equipped for optional icemaker
- LED lighting
- Interior electronic touch controls
- Bottle storage rack
- Sabbath mode capable

Stainless - GLE12HSPSS

Complete features and specifications on pages 228-233. See page 227 for Accessibility Requirements. **Bold = feature upgrade from previous model.** For definitions of logos, see page 9.

\*SmartHQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.





# SIDE-BY-SIDE REFRIGERATORS

## FEATURE HIGHLIGHTS



### SHOWCASE LED LIGHTING

Easily find even the smallest food items thanks to the flush showcase LED lights that illuminate every corner of the refrigerator and freezer.



### ARCTICA ICEMAKER

A special access door puts ice within reach.



### ADJUSTABLE SLIDE-OUT SHELVES

Enjoy a polished look and easy-access cleaning with edge-to-edge glass shelves that extend the full width of the refrigerator.



### ADJUSTABLE CLEAR LOOK DOOR BINS

Transparent fronts make finding your favorite door items quick and easy.



### GLASS FREEZER SHELVES

Enjoy a high-end appearance with secure storage for a variety of items.



### QUICK SPACE SHELF

Functions as a normal full-sized shelf when needed and easily slides down for instant storage flexibility.



### TURBO COOL SETTING

Drops interior temperature to maintain freshness after frequent openings.



### ADJUSTABLE FREEZER DOOR BINS

Enjoy more space for foods of all shapes and sizes.



### SLIDE-OUT FREEZER BASKETS

Keep all your frozen favorites well-organized and easy to find.



COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATORS



**PZS22MSK**  
**GE PROFILE™ 21.9 CU. FT. REFRIGERATOR**

- Showcase LED lighting
- **Quick Ice setting**
- **Turbo Cool setting**
- **Quick Space shelf**
- Advanced water filtration uses XWFE replacement filter
- Adjustable, slide-out, spillproof glass shelves
- Adjustable Clear Look door bins
- Adjustable-humidity drawers
- Glass freezer shelves
- **Tilt-out freezer door bins**

Stainless – PZS22MSKSS

UFAS COMPLIANT



**GZS22IYN**  
**GE 21.8 CU. FT. REFRIGERATOR**

- **Showcase LED lighting**
- Counter-depth design
- Clean appearance
- Adjustable slide-out shelves
- **Glass freezer shelves**
- **Edge-to-edge glass shelves**
- Color-match dispenser
- Fresh-food multi-level drawers
- Advanced water filtration uses XWFE replacement filter

Fingerprint Resistant Stainless – GZS22IYNFS  
Black Slate – GZS22IENDS  
Slate – GZS22IMNES

UFAS COMPLIANT



**GZS22DSJ**  
**GE 21.8 CU. FT. REFRIGERATOR**

- Counter-depth design
- LED lighting
- Integrated shelf support system
- Adjustable slide-out, spillproof glass shelves
- Adjustable clear door bins
- Fresh-food multi-level drawers
- Glass freezer shelves
- Advanced water filtration uses XWFE replacement filter

Stainless – GZS22DSJSS  
Slate – GZS22DMJES  
White – GZS22DGJWW  
Black – GZS22DGJBB

SIDE-BY-SIDE REFRIGERATORS



**PSS28KSH**  
**GE PROFILE 28.4 CU. FT. REFRIGERATOR**

- Angled Showcase LED lighting in fresh food and freezer
- Adjustable, slide-out spillproof glass shelves
- Fresh-food multi-level drawers
- Adjustable Clear Look door bins
- Glass freezer shelves
- Arctica icemaker
- Multi-level freezer baskets
- Quick Ice setting
- Turbo Cool setting
- Advanced water filtration uses XWFE replacement filter

Stainless – PSS28KSHSS

UFAS COMPLIANT



**PSE25KSH**  
**GE PROFILE 25.3 CU. FT. REFRIGERATOR**

- Showcase LED lighting
- Adjustable, slide-out spillproof glass shelves
- Fresh-food multi-level drawers
- Adjustable Clear Look door bins
- Glass freezer shelves
- **Arctica icemaker**
- **Multi-level freezer baskets**
- **Quick Ice setting**
- **Turbo Cool setting**
- Advanced water filtration uses XWFE replacement filter

Stainless – PSE25KSHSS  
Black Stainless – PSE25KBLTS

ENERGY STAR

UFAS COMPLIANT

Complete features and specifications on pages 235-237.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



SIDE-BY-SIDE REFRIGERATORS



Model shown in Black Stainless



**GSS25IEN**  
**GE 25.1 CU. FT. REFRIGERATOR**

- **Showcase LED lighting**
- **Edge-to-edge shelves**
- **Glass freezer shelves**
- **Adjustable Clear Look door bins**
- Color-match dispenser
- Fresh-food multi-level drawers
- Advanced water filtration uses XWFE replacement filter

Fingerprint Resistant Stainless – GSS25IYNFS

Slate – GSS25IMNES

Black Slate – GSS25IENDS

White – GSS25IGNWW

Black – GSS25IGNBB



**GSS23HSH**  
**GE 23.2 CU. FT. REFRIGERATOR**

- 32-3/4" wide
- LED lighting
- **Clear door bins**
- **Glass freezer shelves**
- Integrated shelf-support system
- Adjustable, slide-out spillproof glass shelves
- Fresh-food multi-level drawers
- Adjustable large door bins
- Arctica icemaker
- Advanced water filtration uses XWFE replacement filter

Stainless – GSS23HSHSS



**GSE25GSH**  
**GE 25.3 CU. FT. REFRIGERATOR**

- LED lighting
- Integrated shelf-support system
- Adjustable, slide-out spillproof glass shelves
- Fresh-food multi-level drawers
- Adjustable large door bins
- Arctica icemaker
- Advanced water filtration uses XWFE replacement filter

Stainless – GSE25GSHSS

High-gloss White – GSE25GGHWW

High-gloss Bisque – GSE25GGHCC

High-gloss Black – GSE25GGHBB

**NON-ENERGY STAR® MODELS**

Stainless – GSS25GSHSS

Slate – GSS25GMHES

High-gloss White – GSS25GGHWW

High-gloss Black – GSS25GGHBB

**GSE23GSK**  
**GE 23.2 CU. FT. REFRIGERATOR**

- LED lighting
- Integrated shelf-support system
- Adjustable, slide-out, spillproof glass shelves
- Fresh-food multi-level drawers
- Adjustable door bins
- Arctica icemaker
- Advanced water filtration uses XWFE replacement filter

Stainless – GSE23GSKSS

White – GSE25GGKWW

Black – GSE23GGKBB

Bisque – GSE23GGKCC

**NON-ENERGY STAR MODELS**

Stainless – GSS23GSKSS

Slate – GSS23GMKES

White – GSS23GGKWW

Black – GSS23GGKBB

Complete features and specifications on pages 235-237.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

28

geappliances.com 29

REFRIGERATION

COOKING

DISHWASHERS

CLOTHES CARE

WATER SYSTEMS

AIR CONDITIONERS





# BUILT-IN SIDE-BY-SIDE REFRIGERATORS

## FEATURE HIGHLIGHTS



### LED LIGHTING

Illuminates the fresh-food and freezer compartments, vegetable drawer and climate-controlled drawers to spotlight food without compromising space.



### INTEGRATED DISPENSER WITH LED LIGHTING

Precise settings take the guesswork out of adjusting your refrigerator.



### CLIMATE-CONTROLLED DRAWER

Alter your drawer's internal temperature to suit the food inside, using one of three temperature settings: Meat, Produce or Citrus.

## BUILT-IN SIDE-BY-SIDE REFRIGERATORS



### PSB48YSN

#### GE PROFILE™ 28.7 CU. FT. SMART REFRIGERATOR

- 48" built-in configuration
- Integrated dispenser with LED lighting
- LED lighting
- Climate-controlled drawer
- Built-In WiFi powered by SmartHQ™
- Fresh-food multi-level drawers
- Adjustable spillproof glass shelves
- Large door bins

Stainless - PSB48YSNSS



### PSB42YSN

#### GE PROFILE™ 24.5 CU. FT. SMART REFRIGERATOR

- 42" built-in configuration
- Integrated dispenser with LED lighting
- LED lighting
- Climate-controlled drawer
- Built-In WiFi powered by Smart HQ
- Fresh-food multi-level drawers
- Adjustable spillproof glass shelves
- Large door bins

Stainless - PSB42YSNSS



\*SmartHQ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0. Complete features and specifications on pages 234. See page 227 for Accessibility Requirements. For definitions of logos, see page 9.





# TOP-FREEZER REFRIGERATORS

## FEATURE HIGHLIGHTS



### HIGHLY-RATED

Among 14–18 cu. ft. refrigerators based on an independent study of property maintenance personnel.

Source: The Stevenson Company, 2016.



### LED LIGHTING

Spotlights foods inside, making them easy to see.



### PREMIUM INNER DOOR

Enjoy greater flexibility and organizational options right on the door with modular door bins.



### GARAGE-READY

Our 19 and 22 cu. ft. Top-Freezers with Dual Controls are proven to perform at room temperatures ranging between 38°F to 110° F.



### ADJUSTABLE GLASS FREEZER SHELF

Enjoy a high-end appearance with secure storage for a variety of items.



### GLOSS FINISH

Make your kitchen shine with a polished finish that stands out in any setting.



### MADE IN THE USA

70 to 90% U.S. Content, product details at [geappliances.com/USA](http://geappliances.com/USA).



### SLIDING DELI BIN

Enjoy greater flexibility in your fridge and easily create more space for tall items with an innovative drawer that can be positioned wherever you prefer.



### EDGE-TO-EDGE GLASS SHELVES

Enjoy a polished look and easy-access cleaning with edge-to-edge glass shelves that extend the full width of the refrigerator.



TOP-FREEZER REFRIGERATORS



Model shown in White

**GTS22KGN**  
**GE 21.9 CU. FT. REFRIGERATOR**

- Fits 33" openings
- **Garage-ready\*\***
- Premium inner door
- LED lighting
- Edge-to-edge glass shelves
- Adjustable glass freezer shelf
- High-gloss finish
- Upfront temperature controls

■ Stainless - GTS22KSNRSS  
■ Slate - GTS22KMNRES  
■ Black Slate - GTS22KMNRRS  
■ White - GTS22KGNRWV  
■ Black - GTS22KGNRBB



**GTE22JSN**  
**GE 21.9 CU. FT. REFRIGERATOR**

- Fits 33" openings
- Premium inner door
- LED lighting
- Edge-to-edge glass shelves
- Sliding deli drawer
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless - GTE22JSNRSS  
■ Slate - GTE22JMNRES  
■ White - GTE22JTNRWW  
■ Bisque - GTE22JTNRCC  
■ Black - GTE22JTNRBB



Model shown in White

**GIE22JTN**  
**GE 21.9 CU. FT. REFRIGERATOR**

- Fits 33" openings
- Premium inner door
- LED lighting
- Edge-to-edge glass shelves
- Sliding deli drawer
- Adjustable wire freezer shelf
- Factory-installed icemaker
- Upfront temperature controls

■ Stainless - GIE22JSNRSS  
■ Slate - GIEE22JMNRES  
■ White - GIE22JTNRWW  
■ Black - GIE22JTNRBB



Model shown in White

**GTS19KGN**  
**GE 19.1 CU FT REFRIGERATOR**

- Fits 30" openings
- **Garage-ready\*\***
- Premium inner door
- LED lighting
- Edge-to-edge glass shelves
- Adjustable glass freezer shelf
- High-gloss finish
- Upfront temperature controls

■ Stainless - GTS19KSNRSS  
■ Slate - GTS19KMNRES  
■ White - GTS19KGNRWV  
■ Black - GTS19KGNRBB



Complete features and specifications on pages 238-242.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*Among 14-18 cu. ft. refrigerators based on an independent study of property maintenance personnel. *Source: The Stevenson Company, 2016.*  
\*\*Tested to perform from 38° to 110° F.



TOP-FREEZER REFRIGERATORS



**GIE19JSN**  
**GE 19.1 CU. FT. REFRIGERATOR**

- Fits 30" openings
- Premium inner door
- LED lighting
- Edge-to-edge glass shelves
- Sliding deli drawer
- Adjustable wire freezer shelf
- Factory-installed icemaker

■ Stainless – GIE19JSNRSS



**GTS18HGN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- **Gloss finish**
- LED lighting
- **Glass freezer shelf**
- Sliding deli bin
- Edge-to-edge glass shelves

■ Stainless – GTS18HSNRSS  
■ Slate – GTS18HMNRES  
■ High-gloss White – GTS18HGNRWW  
■ High-gloss Black – GTS18HGNRBB



Model shown in White



**GTE19JTN**  
**GE 19.1 CU. FT. REFRIGERATOR**

- Fits 30" openings
- Premium inner door
- LED lighting
- **Edge-to-edge glass shelves**
- **Sliding deli drawer**
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTE19JSNRSS  
■ White – GTE19JTNRWW  
■ Black – GTE19JTNRBB



Model shown in White



**GIE18GTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Edge-to-edge glass shelves
- Sliding deli drawer
- Adjustable wire freezer shelf
- Upfront temperature controls
- Factory-installed icemaker

■ Stainless – GIE18GSNRSS  
■ Silver – GIE18GCNRSA  
■ White – GIE18GTNRWW  
■ Black – GIE18GTNRBB



Model shown in White



**GTE19DTN**  
**GE 19.1 CU. FT. REFRIGERATOR**

- Fits 30" openings
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles
- ENERGY STAR® certified
- **Premium inner door**

■ White – GTE19DTNRWW  
■ Black – GTE19DTNRBB



Model shown in White



**GTE18GSN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Edge-to-edge glass shelves
- Sliding deli drawer
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTE18GSNRSS  
■ Slate – GTE18GMNRES  
■ White – GTE18GTNRWW  
■ Bisque – GTE18GTNRBB  
■ Black – GTE18GTNRCC



Complete features and specifications on pages 238-242.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*Among 14-18 cu. ft. refrigerators based on an independent study of property maintenance personnel. *Source: The Stevenson Company, 2016.*  
\*\*Tested to perform from 38° to 110° F.



TOP-FREEZER REFRIGERATORS



Model shown in White



VOTED #1\*

**GTS18GTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- **Edge-to-edge glass shelves**
- **Sliding deli drawer**
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTS18GSNRSS  
□ White – GTS18GTNRWW  
■ Black – GTS18GTNRBB



Model shown in White



VOTED #1\*

**GTS18DTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

□ White – GTS18DTNRWW  
■ Black – GTS18DTNRBB



Model shown in White



VOTED #1\*

**GIE18DTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- **Factory-installed icemaker**

□ White – GIE18DTNRWW  
■ Black – GIE18DTNRBB



VOTED #1\*

**GIE17GSN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Sliding deli bin
- Edge-to-edge glass shelves
- Adjustable wire freezer shelf
- Factory-installed icemaker

■ Stainless – GIE17GSNRSS



VOTED #1\*

**GTE18DCN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

■ Silver – GTE18DCNRSA  
□ White – GTE18DTNRWW  
■ Black – GTE18DTNRBB



VOTED #1\*

**GTE17GSN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Sliding deli drawer
- Edge-to-edge glass shelves
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTE17GSNRSS  
□ White – GTE17GTNRWW  
■ Black – GTE17GTNRBB



Complete features and specifications on pages 238-242.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*Among 14-18 cu. ft. refrigerators based on an independent study of property maintenance personnel. Source: *The Stevenson Company, 2016.*



TOP-FREEZER REFRIGERATORS



Model shown in White

**GTS17GTN**  
**GE 16.6 CU. FT. RECESSED HANDLE REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- **Sliding deli drawer**
- **Edge-to-edge glass shelves**
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTS17GSNRSS  
□ White – GTS17GTNRWW



Model shown in White

**GTS17DTN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

□ White – GTS17DTNRWW  
■ Black – GTS17DTNRBB



Model shown in White

**GPE17CTN**  
**GE 16.6 CU. FT. RECESSED HANDLE REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Pocket handles
- Adjustable wire shelves

□ White – GPE17CTNRWW



Model shown in White

**GTE16DTN**  
**GE 15.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves

□ White – GTE16DTNRWW (Right-hand door swing)  
□ White – GTE16DTNLWW (Left-hand door swing)  
■ Bisque – GTE16DTNRCC



Model shown in White

**GTE17DTN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves

□ White – GTE17DTNRWW  
■ Bisque – GTE17DTNRCC  
■ Black – GTE17DTNRBB



**GPE12FSK**  
**GE 11.6 CU. FT. REFRIGERATOR**

- Fits 24" openings
- Equipped for optional icemaker
- LED lighting in fresh-food section
- Upfront electronic temperature controls
- 3 glass fresh-food shelves
- 2 clear freezer door bins
- 2 clear crispers drawers
- Wire freezer step-shelf
- Gallon door storage

■ Stainless – GPE12FSKSB  
□ White – GPE12FGKWW  
■ Black – GPE12FGKBB



Complete features and specifications on pages 238-242.  
See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*Among 14-18 cu. ft. refrigerators based on an independent study of property maintenance personnel. *Source: The Stevenson Company, 2016.*



REFRIGERATOR WATER FILTERS



RPWFE  
PREMIUM REPLACEMENT  
FILTER

- GE Appliances' most advanced filtration ever—industry-first filter to reduce Chloramine and Chlorine taste and odor for improved taste
- LeakDetect technology—filter communicates with refrigerator if leak is detected. Water is shut off to refrigerator with consumer notification on display
- GE guaranteed fit—Designed and tested specifically for use in select GE French-Door refrigerators\*\*\*
- Tested and verified to reduce 8 trace pharmaceuticals, including ibuprofen, progesterone, atenolol, trimethoprim and fluoxetine\*
- IAPMO certified to filter impurities such as PFOA/PFOS, BPA, cysts, lead, mercury, asbestos and select pesticides, chemicals and 50 other impurities
- Rated Capacity: 170 gallons or 6 months\*\*
- PFOA/PFOS reduction reduces 99% of Perfluorooctanoic acid (PFOA) and Perfluorooctaine Sulfonate (PFOS)



XWFE  
PREMIUM REPLACEMENT  
FILTER

- GE Appliances' most advanced filtration ever—filters Chloramine and Chlorine taste and odor for improved taste
- GE guaranteed fit—Designed and tested specifically for use in select side-by-side and bottom-freezer refrigerators\*\*\*
- LeakDetect technology—filter communicates with refrigerator if leak is detected. Water is shut off to refrigerator with consumer notification on display
- Tested and verified to reduce 8 pharmaceuticals, including ibuprofen, progesterone, atenolol, trimethoprim and fluoxetine\*
- IAPMO certified to filter impurities such as PFOA/PFOS, BPA, cysts, lead, mercury, asbestos and select pesticides, chemicals and 50 other impurities
- Rated Capacity: 170 gallons or 6 months\*\*
- XWFE replaces XWF compatible with all refrigerators using XWF
- PFOA/PFOS reduction reduces 99% of Perfluorooctanoic acid (PFOA) and Perfluorooctaine Sulfonate (PFOS)



MWFP  
PREMIUM REPLACEMENT  
FILTER

- GE guaranteed fit—Designed and tested specifically for use in select side-by-side and bottom-freezer refrigerators\*\*\*
- Tested and verified to reduce 5 trace pharmaceuticals, including ibuprofen, progesterone, atenolol, trimethoprim and fluoxetine\*
- NSF certified to filter impurities such as cysts, lead, mercury, asbestos and select pesticides, chemicals and 50 other impurities
- NSF certified for structural performance and to filter chlorine taste and odor and particulates
- Rated Capacity: 300 gallons or 6 months\*\*



MSWF  
REPLACEMENT FILTER

- GE guaranteed fit—Compatible with select GE side-by-side and bottom-freezer refrigerators\*\*\*
- NSF certified to filter impurities such as lead, mercury, asbestos and select pesticides and chemicals
- NSF certified for structural performance and to filter chlorine taste and odor and particulates
- Rated Capacity: 300 gallons or 6 months\*\*



GSWF  
REPLACEMENT FILTER

- GE guaranteed fit—Designed and engineered specifically for use in select GE top-freezer and bottom-freezer refrigerators\*\*\*
- NSF certified to filter impurities such as cysts, lead and select pesticides and chemicals
- NSF certified for structural performance and to filter chlorine taste and odor and particulates
- Rated Capacity: 750 gallons or 6 months\*\*



AFPWF  
AUTOFILL PITCHER  
WATER FILTER

- NSF certified to filter chlorine taste and odor and particulates
- GE guaranteed fit—Compatible with select GE refrigerators with Autofill Pitchers
- Rated Capacity: 170 gallons or 6 months\*\*

GE filters are certified by NSF International or IAPMO for contaminant reduction and structural performance. GE filters are proven to filter impurities from drinking water.

Certified by NSF International or IAPMO to reduce†	RPWFE	XWFE	MWFP	MSWF	GSWF	AFPWF
Chlorine Taste and Odor	✓	✓	✓	✓	✓	✓
BPA	✓	✓				
Chloramine	✓	✓				
PFOA/PFOS	✓	✓				
Lead, Mercury	✓	✓	✓	✓	✓	
Cysts††	✓	✓	✓	✓	✓	
Particulate Chemicals (Benzene, p-Dichlorobenzene)	✓	✓	✓	✓		
Herbicides (Atrazine, 2, 4-D), Pesticide (Carbofuran)	✓	✓	✓	✓	Atrazine only	
Insecticides (Lindane, Toxaphene)	✓	✓	✓	✓	Lindane only	
Select Natural Deposits (Asbestos)	✓	✓	✓	✓		
Volatile Organic Compounds	✓	✓				
Select Pharmaceuticals	✓	✓				

The following pharmaceutical reduction claims have not been certified by NSF International or IAPMO. Claims tested and verified by independent laboratory:

Pharmaceuticals (Progesterone, Trimethoprim, Fluoxetine, Atenolol, Ibuprofen†)			✓			
--	--	--	---	--	--	--

†See performance data sheet for impurities reduction information by model. Not all filters reduce all impurities listed.  
††Based on the use of Cryptosporidium parvum cysts.

\*The substances reduced by this filter are not necessarily in your water.  
\*\*Cartridge should be replaced every 6 months at a rated capacity, or sooner if a noticeable reduction in flow rate occurs.  
\*\*\*See your owner's manual or chart section of the catalog for the correct filter for your refrigerator. GE has not qualified non-GE-branded filters for use in GE refrigerators and there is no assurance that non-GE-branded filters meet GE's standards for quality, performance and reliability. NSF (National Sanitation Foundation).

LEARN MORE OR ORDER GE WATER FILTERS BY CALLING 800-851-6200.



TOP-FREEZER FILTRATION SYSTEMS

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



- GXRLQK**  
**GE EXTERIOR REFRIGERATOR/ ICEMAKER FILTRATION SYSTEM**
- Reduces lead, select pharmaceuticals, select VOCs, cysts, chlorine taste and odor and other contaminants
  - **Filter installs directly to refrigerator water line for refrigerators without built-in filtration**
  - 6-month filter life/150 gallons (varies with local water conditions)
  - Twist and lock design - Provides for easy, tool-free, no-mess filter replacement
  - **No water shutoff or tools needed to replace filters**
  - Replacement filter: FQK1K

PREMIUM

ADVANCED

BASIC



- GXRTDR**  
**GE EXTERIOR REFRIGERATOR/ ICEMAKER FILTRATION SYSTEM**
- Filter installs directly to refrigerator water line for refrigerators without built-in filtration
  - 6-month filter life/2,500 gallons (varies with local water conditions)
  - Water must be shut off to replace system

PREMIUM

ADVANCED

BASIC



- GXRTLL**  
**IN-LINE TOP-FREEZER REPLACEMENT FILTER**
- Filter installs directly to refrigerator water line for refrigerators without built-in filtration
  - 5-year filter life - Filter should be replaced every 5 years or 5,250 gallons for best filtration results (varies with local water conditions)
  - Water must be shut off to replace system

PREMIUM

ADVANCED

BASIC

REFRIGERATION PARTS & ACCESSORIES



	IM6D	IM4D	IM5D
	GE ICEMAKER KIT	GE ICEMAKER	GE ICEMAKER KIT
	<ul style="list-style-type: none"><li>• Quickly install a new or replacement IM6 icemaker unit with an all-inclusive kit</li><li>• Includes ice bucket, fill tube, water inlet valve, installation materials and hardware</li><li>• Complete icemaker kit that will fit most GE refrigerators</li></ul>	<ul style="list-style-type: none"><li>• For use in most top-freezer refrigerators and some bottom-freezer refrigerators, please check the label on the back of your refrigerator to ensure compatibility</li></ul>	<ul style="list-style-type: none"><li>• For use in select French-Door bottom-freezer refrigerators</li><li>• Quickly install a second icemaker in freezer section with an all-inclusive kit</li></ul>
MODEL			
PYD22KBL	—	—	OPTIONAL ACCESSORY
PYE22KMK	—	—	OPTIONAL ACCESSORY
GYE22HMK	—	—	OPTIONAL ACCESSORY
PFD28KBL	—	—	OPTIONAL ACCESSORY
PFE28KSK	—	—	OPTIONAL ACCESSORY
GFD28GEL	—	—	OPTIONAL ACCESSORY
GFE28HSK	—	—	OPTIONAL ACCESSORY
GFE28GSK	—	—	OPTIONAL ACCESSORY
GLE12HSL	OPTIONAL ACCESSORY	—	—
GTE21GTH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTS21FMK	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTE18GMH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTS18FGL	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTE18CTH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTE16GTH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTE16DTH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GPE16DTH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GTE15CTH	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—
GPE12FSK	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	—



PM08X10008	WX08X10006—8' LENGTH
UNIVERSAL BRAIDED PEX WATER LINE	UNIVERSAL PEX WATER LINE
<ul style="list-style-type: none"><li>• 8' length for easily accessible installation</li><li>• PEX inner tube for improved ice and water taste</li><li>• Non-corrosive coating</li><li>• 1/4" inlet and outlet fittings</li><li>• NSF certified (National Sanitation Foundation)</li></ul>	<ul style="list-style-type: none"><li>• Constructed of cross-linked reinforced polyethylene for greater durability</li><li>• Flexible material resists kinking</li><li>• Eliminates pitting and cracking for lasting performance</li><li>• NSF certified</li><li>• No need for solder or torch for installation</li></ul> <p><b>WX08X10002</b>—2' length <b>WX08X10015</b>—15' length <b>WX08X10025</b>—25' length</p>

**SMARTCONNECT™ REFRIGERATOR TUBING KITS** make it easy to install a water line for icemakers and dispensers on any applicable GE Appliances refrigerator.





# COMPACT & UNDERCOUNTER REFRIGERATION

## FEATURE HIGHLIGHTS

### COMPACT REFRIGERATORS



#### ENERGY STAR® CERTIFIED

Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings.



#### GLASS SHELVES

Create convenient food storage with easy-to-clean shelves.



#### CAN RACKS

Quick and easy access to your favorite drinks.

### WINE & BEVERAGE CENTERS



#### BUILT-IN OR FREESTANDING CAPABLE

Allows for installation flexibility.



#### FULL-EXTENSION WINE RACKS

Safely and securely store wine bottles using five contoured racks.



#### LARGE BOTTLE AND CAN CAPACITY

Provides ample space for your favorites.

### ICE MAKERS



#### NUGGET ICE

Enhance specialty drinks, fill up water bottles more easily, and provide a base for chilled platters with nugget-style ice.



#### GOURMET CLEAR ICE

The primary flavor of a drink lasts longer when you use this ice maker's large, slow-melting, gourmet-style ice. Each distinctively clear cube has a solid, smooth texture.



#### BUILT-IN OR FREESTANDING CAPABLE

Allows for installation flexibility.



COMPACT REFRIGERATORS



- GCE06GSH**  
**GE 5.6 CU. FT. REFRIGERATOR**
- Durability-tested compressor
  - **Built-in or freestanding capability**
  - Can rack
  - **Interior lighting**
  - **Clear crisper drawer**
  - 2 glass shelves
  - Manual defrost
  - Fresh-food door shelves
  - **2 mini ice trays**
- Stainless – GCE06GSHSB  
■ White – GCE06GGHWW  
■ Black – GCE06GGHBB



Model shown in Black



- GME04GGK**  
**GE 4.4 CU. FT. REFRIGERATOR**
- Durability-tested compressor
  - Can rack
  - Tall bottle door storage
  - Recessed handles
  - Manual defrost
  - **3 glass shelves**
  - Fresh-food door shelves
  - Mini ice tray
- CleanSteel™ – GME04GLKLB  
■ White – GME04GGKWW  
■ Black – GME04GGKBB



- GDE03GLK**  
**GE 3.1 CU. FT. DOUBLE-DOOR REFRIGERATOR**
- Durability-tested compressor
  - Separate freezer compartment
  - Interior lighting
  - Clear crisper drawer
  - Glass shelves
  - Built-In can rack
  - Door shelves
  - Reversible door swing
- CleanSteel – GDE03GLKLB  
■ White – GDE03GGKWW  
■ Black – GDE03GGKBB

Complete features and specifications on page 244.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

ICE MAKERS



Shown with optional custom panel

- UCC15NJII**  
**15" GOURMET CLEAR ICE MAKER**
- Up to 48 pounds of gourmet clear ice production per day
  - Panel-ready\*
  - Large-capacity ice bin
  - Interior LED lighting
  - Clean indicator light
  - Ice scoop
  - Optional UPK3 drain pump kit
  - Built-in or freestanding capability allows for installation flexibility
  - Indoor or outdoor capability allows for flexible placement
- Stainless



Shown with optional GE Profile™ Stainless door panel model kit PIP70SS

- UNC15NJII**  
**15" NUGGET ICE MAKER**
- Up to 56 pounds of nugget ice production per day
  - Panel-ready\*
  - Large-capacity ice bin
  - Interior LED lighting
  - Clean indicator light
  - Ice scoop
  - Optional UPK3 drain pump kit
  - Built-in or freestanding capability allows for installation flexibility
  - Indoor or outdoor capability allows for flexible placement
- Stainless

ICEMAKER FILTRATION SYSTEMS

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



- GXRLQK**  
**GE EXTERIOR REFRIGERATOR/ ICEMAKER FILTRATION SYSTEM**
- Reduces lead, select pharmaceuticals, select VOCs, cysts, chlorine taste and odor and other contaminants
  - **Filter installs directly to refrigerator water line for refrigerators without built-in filtration**
  - 6-month filter life/150 gallons (varies with local water conditions)
  - Twist and lock design—Provides for easy, tool-free, no-mess filter replacement
  - **No water shutoff or tools needed to replace filters**
  - Replacement filter: FQK1K



- GXRTDR**  
**GE EXTERIOR REFRIGERATOR/ ICEMAKER FILTRATION SYSTEM**
- Filter installs directly to refrigerator water line for refrigerators without built-in filtration
  - 6-month filter life/2,500 gallons (varies with local water conditions)
  - Water must be shut off to replace system

\*Sold separately, required to complete installation.



WINE & BEVERAGE CENTERS



PWS06DSP  
GE PROFILE™ 5.1 CU. FT. WINE CENTER

- Modern design with stainless handle and glass door
- Dual zone temperature controls
- 6 slide-out wine racks
- 44-bottle capacity
- Freestanding or built-in capable
- Recessed LED lighting
- Digital temperature controls
- Door alarm

Stainless - PWS06DSPSS (Fall 2020)



PVS06BSP  
GE PROFILE 5.1 CU. FT. BEVERAGE CENTER

- Modern design with stainless handle and glass door
- 4 reversible glass and wood shelves
- Showcase shelf
- 155-can or 52-bottle capacity
- Freestanding or built-in capable
- Recessed LED lighting
- Digital temperature controls
- Door alarm

Stainless - PVS06BSPSS (Fall 2020)



GWS04HAE  
GE 4.1 CU. FT. WINE CENTER

- 30-bottle capacity
- Stainless steel door with large glass window
- 5 wine racks
- Upfront electronic controls
- Interior lighting
- Built-in or freestanding capability
- Door lock with key

Stainless - GWS04HAESS



GVS04BQN  
GE 4.1 CU. FT. WINE & BEVERAGE CENTER

- 125-can/31-bottle capacity
- Stainless steel door with large glass window
- 3 adjustable, full-depth and 2 half-depth, wooden racks
- Upfront electronic controls
- Interior lighting
- Built-in or freestanding capability
- Door lock with key

Stainless - GVS04BQNSS



PCR06WAT  
GE PROFILE 5.5 CU. FT. WINE CENTER

- Electromechanical temperature controls
- 57-bottle capacity
- 7 full-extension wine racks with beechwood drawer fronts
- Tinted glass door with Stainless accents
- Contoured door design
- Built-in or freestanding capability
- Recessed handle
- Reversible door

Stainless - PCR06WATSS



PCR06BAT  
GE PROFILE 5.5 CU. FT. WINE & BEVERAGE CENTER

- Electromechanical temperature controls
- 150-can capacity or 126-can and 12-bottle flexibility
- 2 full-extension wine racks with beechwood drawer fronts and 3 spillproof glass shelves
- Tinted glass door with Stainless accents
- Contoured door design
- Built-in or freestanding capability
- Recessed handle
- Reversible door

Stainless - PCR06BATSS

Complete features and specifications on page 243.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.





# FREEZERS

## FEATURE HIGHLIGHTS

### UPRIGHT FREEZERS



#### GARAGE-READY

GE freezers are tested to perform from 0°F to 110°F.



#### AUDIBLE TEMP ALARM

Alerts you if the door is left open or if the temperature rises.




#### GLASS SHELVES & CLEAR BINS

Enjoy more flexible storage and find items quickly with this clear slide-out bin.



#### HIGHEST-RATED LINEUP IN THE INDUSTRY

Based on aggregated ratings and review data from GEA.com and leading retail websites.



#### LED LIGHTING

Automatically illuminates when door is open.



#### LOCK WITH KEY

Allows you to protect your valuable food items.

### CHEST FREEZERS



#### GARAGE-READY

GE freezers are tested to perform from 0°F to 110°F.



#### SECOND-LEVEL RAIL

Allows convenient access to sliding baskets at different heights in freezer.



#### LOCK WITH KEY

Allows you to protect your valuable food items.



UPRIGHT FREEZERS



**FUF21DLRWW**  
**GE 21.3 CU. FT. FROST-FREE FREEZER**

- Garage-ready\*\*
- Audible temperature alarm
- **4 glass, 2 adjustable freezer shelves**
- Exterior electronic temperature control
- Turbo Freeze
- LED interior lighting
- Lock with key
- **4 full-width clear door bins**
- **3 clear freezer drawers**

☐ White



**FUF21SMRWW**  
**GE 21.3 CU. FT. FROST-FREE UPRIGHT FREEZER**

- Garage-ready\*\*
- Audible temperature alarm
- 4 wire, 2 adjustable freezer shelves
- Exterior electronic temperature control
- Turbo Freeze
- LED interior lighting
- **Lock with key**
- 4 full-width opaque door bins
- 1 wire freezer basket

☐ White



**FUF17DLRWW**  
**GE 17.3 CU. FT. FROST-FREE FREEZER**

- Garage-ready\*\*
- Audible temperature alarm
- **4 glass, 2 adjustable freezer shelves**
- Exterior electronic temperature control
- Turbo Freeze
- LED interior lighting
- Lock with key
- **4 full-width clear door bins**
- **3 clear freezer drawers**

☐ White



**FUF17SMRWW**  
**GE 17.3 CU. FT. FROST-FREE UPRIGHT FREEZER**

- Garage-ready\*\*
- Audible temperature alarm
- 4 wire, 2 adjustable freezer shelves
- Exterior electronic temperature control
- Turbo Freeze
- LED interior lighting
- **Lock with key**
- 4 full-width opaque door bins
- 1 wire freezer basket

☐ White



**FUF14DLRWW**  
**GE 14.1 CU. FT. FROST-FREE FREEZER**

- Garage-ready\*\*
- Audible temperature alarm
- **4 glass, 2 adjustable freezer shelves**
- Exterior electronic temperature control
- Turbo Freeze
- LED interior lighting
- Lock with key
- **4 full-width clear door bins**
- **3 clear freezer drawers**

☐ White



**FUF14SMRWW**  
**GE 14.1 CU. FT. FROST-FREE UPRIGHT FREEZER**

- **Garage-ready\*\***
- **Audible temperature alarm**
- 4 wire, 2 adjustable freezer shelves
- Exterior electronic temperature control
- Turbo Freeze
- LED interior lighting
- **Lock with key**
- 4 full-width opaque door bins
- 1 wire freezer basket

☐ White



Complete features and specifications on page 245.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*The highest rated upright freezer lineup in the industry—based on aggregated data from GEA.com and leading retail websites.  
\*\*GE freezers are tested to perform from 0°F to 110°F.



CHEST FREEZERS



FCM22DLWW

GE 21.7 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Audible temperature alarm
- Second level rail
- LED interior lighting
- Lock with key
- Power “On” light
- **5 sliding bulk storage baskets**
- **4 customizable dividers**
- Adjustable temperature control

White



FCM11PHWW

GE 10.6 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power “On” light
- **3 lift-out, sliding bulk storage baskets**
- Lock with key
- Adjustable temperature control
- **Interior lighting**

White



FCM16DLWW

GE 15.7 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- **Audible temperature alarm**
- **Second level rail**
- LED interior lighting
- Lock with key
- Power “On” light
- **4 sliding bulk storage baskets**
- Adjustable temperature control

White



FCM7SKWW

GE 7.0 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power “On” light
- **2 lift-out, sliding bulk storage baskets**
- Adjustable temperature control
- Recessed handles
- Upfront defrost water drain
- Manual defrost

White



FCM16SLWW

GE 15.7 CU. FT. MANUAL DEFROST CHEST FREEZER

- Garage-ready\*\*
- **Hi Temp indicator light**
- 2 sliding bulk storage baskets
- **LED interior lighting**
- Lock with key

White



FCM5SKWW

GE 5.0 CU. FT. MANUAL DEFROST FREEZER

- **Garage-ready\*\***
- Power “On” light
- 1 Lift-out, sliding bulk storage basket
- Adjustable temperature control
- Recessed handles
- Upfront defrost water drain
- Manual defrost

White

Complete features and specifications on page 249.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*\*GE freezers are tested to perform from 0°F to 110°F.





COOKING



# SPLENDID POSSIBILITIES

Cooking products from GE Appliances & GE Profile™ give homeowners total design flexibility, so they can configure their kitchen and cooking space exactly as they like.



PHP9036BMTS—See pg. 78.



PVM9005BLTS (microwave oven)—See pg. 137.  
PGB965BPTS (free-standing gas range)—See pg. 128.



PTS7000BNTS—See pg. 68.



JTD5000ENES—See pg. 65.



JVM6175SKSS (microwave oven)—See pg. 138.  
JGS760SPSS (slide-in gas range)—See pg. 115.



UVH13012MSS—See pg. 105.




UVW8301SLS (hood)—See pg. 95.  
JGP5030SLSS (cooktop)—See pg. 91.  
JTS3000SNSS (wall oven)—See pg. 69.






# WALL OVENS

## FEATURE HIGHLIGHTS




### IN-OVEN CAMERA

Check in without checking out thanks to an in-oven camera that allows you to check the progress of your food remotely.




### PRECISION COOKING MODES

Enjoy advanced technology that provides simple instructions then automatically adjusts temperature and cook times for perfect results.



### HOT-AIR FRYING

Achieve crispy, never greasy, fried food results in your oven without the oil.

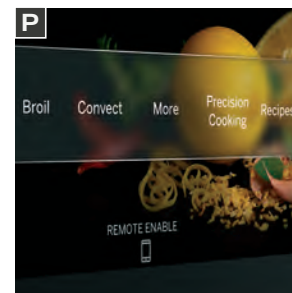

### UPGRADABLE APPLIANCES


Enable peak performance in the kitchen and enjoy an ever-growing number of precision cooking modes thanks to ongoing software updates that keep your oven current.



### BUILT-IN WIFI POWERED BY SmartHQ™

Preheat the oven on the way home from soccer practice or while running errands, thanks to wireless capability that gives you control from anywhere using your smartphone.

Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### DIRECT AIR CONVECTION

Optimize your results on roasts, chicken, turkey and other special-occasion favorites, with the only cooking system that delivers true top-down convection.




### NO-PREHEAT OPTIONS

Save time with a variety of precision cooking modes that eliminate the need for preheating.



### NEVER-SCRUB, HEAVY-DUTY, SMOOTH-GLIDE RACKS

Engineered to glide seamlessly out of the oven even with heavy dishes, durable Never-Scrub roller racks can remain in the oven during self-clean cycle.



### FIT GUARANTEE

Replacing a similar wall oven from GE Appliances or another brand? GE wall ovens are guaranteed for an exact fit or GE Appliances will pay up to \$300 toward modifications. See sales associate or [geappliances.com](http://geappliances.com) for details.



BUILT-IN DOUBLE WALL OVENS



- PTD9000**  
**GE PROFILE™ 30" SMART CONVECTION DOUBLE OVEN**
- **In-oven camera**
  - Precision cooking modes
  - Brilliant touch 7" display
  - True European Convection with Direct Air
  - No preheat options
  - Hot air frying
  - Built-in WiFi powered by SmartHQ™
  - **Soft-close door**
- Stainless - PTD9000SNSS  
Black Stainless - PTD9000BNTS

Perfect Match Cooktops:  
PHP9036 (Induction), PP7036 (Electric),  
PGP7036 (Gas)



Model shown in Black Stainless



- PTD7000**  
**GE PROFILE 30" SMART CONVECTION DOUBLE OVEN**
- Precision cooking modes
  - Brilliant touch 7" LCD control
  - True European Convection with Direct Air (both)
  - No-preheat options
  - Hot air frying
  - Built-in WiFi powered by SmartHQ
  - Never-scrub, heavy-duty, smooth-glide racks (both)
  - Self-clean oven with optional Steam Clean (both)
  - Precision temperature probe
  - 10-pass hidden bake element
- Stainless - PTD7000SNSS  
Black Stainless - PTD7000BNTS

Perfect Match Cooktops:  
PHP9036 (Induction), PP7036 (Electric),  
PGP7036 (Gas)



- JTD5000**  
**GE 30" SMART CONVECTION DOUBLE OVEN**
- True European Convection (upper)
  - Hidden backlit LCD control
  - Never-scrub, heavy-duty, smooth-glide racks
  - Precision temperature probe
  - Self-clean oven with optional Steam Clean (both)
  - Built-in WiFi powered by SmartHQ
  - 10-pass hidden bake element
  - 8-pass broil element
- Stainless - JTD5000SNSS  
Slate - JTD5000ENES  
Black Slate - JTD5000FNDS  
White - JTD5000DNWW  
Black - JTD5000DNBB

Perfect Match Cooktops:  
JP5030 (Electric), JGP5030 (Gas)



Model shown in Black Slate



- JTD3000**  
**GE 30" SMART DOUBLE OVEN**
- Never-scrub, heavy-duty racks
  - Self-clean oven with optional Steam Clean (both)
  - Built-in WiFi powered by SmartHQ
  - Glass touch controls
  - 10-pass hidden bake element
  - 8-pass broil element
- Stainless - JTD3000SNSS  
Slate - JTD3000ENES  
White - JTD3000DNWW  
Black - JTD3000DNBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)




Model shown in Slate



- PTD700L**  
**GE PROFILE 30" SMART CONVECTION DOUBLE OVEN WITH LEFT-HAND SIDE-SWING DOORS**
- **Swing door design**
  - Precision cooking modes
  - Hot air frying
  - No preheat options
  - Built-in WiFi powered by SmartHQ
  - Brilliant touch 7" display
  - True European Convection with Direct Air
  - Never-scrub, heavy-duty roller racks
  - Precision temperature probe
  - Self-clean with Steam Clean option
- Stainless - PTD700LSNSS

Perfect Match Cooktops:  
PP7036 (Electric), PGP7036 (Gas)




- PTD700R**  
**GE PROFILE 30" SMART CONVECTION DOUBLE OVEN WITH RIGHT-HAND SIDE-SWING DOORS**
- **Swing door design**
  - Precision cooking modes
  - Hot air frying
  - No preheat options
  - Built-in WiFi powered by SmartHQ
  - Brilliant touch 7" display
  - True European Convection with Direct Air
  - Never-scrub, heavy-duty roller racks
  - Precision temperature probe
  - Self-clean with Steam Clean option
- Stainless - PTD700RSNSS

Perfect Match Cooktops:  
PP7036 (Electric), PGP7036 (Gas)



- PKD7000**  
**GE PROFILE 27" SMART CONVECTION DOUBLE OVEN**
- Brilliant touch 7" LCD control
  - True European Convection (upper)
  - Built-in WiFi powered by SmartHQ
  - Never-scrub, heavy-duty, smooth-glide racks (both)
  - Precision temperature probe
  - 10-pass hidden bake element
  - 8-pass broil element
  - Self-clean oven with optional Steam Clean (both)
- Stainless - PKD7000SNSS  
Black Stainless - PKD7000BNTS

Perfect Match Cooktops:  
PP7036 (Electric), PGP7036 (Gas)



- JKD5000**  
**GE 27" SMART CONVECTION DOUBLE OVEN**
- True European Convection (upper)
  - Hidden backlit LCD control
  - Never-scrub, heavy-duty, smooth-glide racks
  - Precision temperature probe
  - Self-clean oven with optional Steam Clean (both)
  - Built-in WiFi powered by SmartHQ
  - 10-pass hidden bake element
  - 8-pass broil element
- Stainless - JKD5000SNSS  
Slate - JKD5000ENES  
White - JKD5000DNWW  
Black - JKD5000DNBB

Perfect Match Cooktops:  
JP5030 (Electric), JGP5030 (Gas)



Complete features and specifications on pages 246–247.  
See page 266 for approved cooktop and wall oven combinations.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



BUILT-IN DOUBLE WALL OVENS



JDK3000  
GE 27" SMART DOUBLE OVEN

- **Never-scrub, heavy-duty racks**
- Self-clean oven with optional Steam Clean (both)
- **Built-in WiFi powered by SmartHQ™**
- Glass touch controls
- 10-pass hidden bake element
- 8-pass broil element

Stainless - JDK3000SNSS  
White - JDK3000DNWW  
Black - JDK3000DNBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)




JRP28  
GE 24" DOUBLE OVEN

- Self-clean oven (upper)
- Electronic oven controls
- Clear view window
- Interior oven light
- Two oven racks (both)
- Multiple oven rack positions

Stainless - JRP28SKSS  
Black - JRP28BJBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)



BUILT-IN COMBINATION DOUBLE WALL OVENS



PT9800  
GE PROFILE™ 30" DOUBLE OVEN WITH ADVANTIUM® TECHNOLOGY

- **Speedcook oven 120V (upper)**
- **Multiple cooking functions**
- **Halogen heat (upper)**
- **Over 175 preprogrammed menu selections (upper)**
- True European Convection (lower)
- Self-clean with Steam Clean option (lower)
- Self-clean, heavy-duty roller rack (lower)
- Glass touch controls

Stainless - PT9800SHSS

Perfect Match Cooktops:  
PP9030 (Electric), PGP9030 (Gas)



PT7800  
GE PROFILE 30" DOUBLE OVEN WITH CONVECTION

- 1.7 cu. ft. microwave capacity
- 1,000 watts (IEC-705 test procedure)
- **Convection microwave (upper)**
- 16" turntable (upper)
- **True European Convection (lower)**
- Self-clean with Steam Clean option (lower)
- **Self-clean, heavy-duty roller rack (lower)**
- Glass touch controls

Stainless - PT7800SHSS  
Slate - PT7800EKES  
White - PT7800DHWV  
Black - PT7800DHBB

Perfect Match Cooktops:  
PP7030 (Electric), PGP7030 (Gas)



Model shown in Slate




PK7800  
GE PROFILE 27" DOUBLE OVEN

- 1.7 cu. ft. microwave capacity
- 1,000 watts (IEC-705 test procedure)
- **Convection microwave (upper)**
- 16" turntable (upper)
- **True European Convection (lower)**
- Self-clean with Steam Clean option (lower)
- **Self-clean, heavy-duty roller rack (lower)**
- Glass touch controls

Stainless - PK7800SKSS  
Slate - PK7800EKES

Perfect Match Cooktops:  
PP7030 (Electric), PGP7030 (Gas)



JT3800  
GE 30" DOUBLE OVEN

- 1.7 cu. ft. microwave capacity
- 1,000 watts (IEC-705 test procedure)
- Sensor cooking controls (upper)
- 16" turntable (upper)
- Self-clean with Steam Clean option (lower)
- Self-clean, heavy-duty oven racks (lower)

Stainless - JT3800SHSS  
Black - JT3800DHBB

JK3800 (not shown)  
GE 27" DOUBLE OVEN

Similar to the JT3800, except 27" wide.

Stainless - JK3800SHSS  
White - JK3800DHWV  
Black - JK3800DHBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)



Complete features and specifications on pages 247-250.  
See page 266 for approved cooktop and wall oven combinations.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



BUILT-IN SINGLE WALL OVENS



PTS9000  
GE PROFILE™ 30" SMART  
CONVECTION SINGLE OVEN

- In-oven camera
- Precision cooking modes
- Brilliant touch 7" display
- True European Convection with Direct Air
- No preheat options
- Hot air frying
- Built-in WiFi powered by SmartHQ™
- Soft-close door

- Stainless - PTS9000SNSS
- Black Stainless - PTS9000BNTS

Perfect Match Cooktops:  
PHP9036 (Induction), PP7036 (Electric),  
PGP7036 (Gas)



Model shown in Black Stainless

PTS7000  
GE PROFILE 30" SMART  
CONVECTION SINGLE OVEN

- Precision cooking modes
- Brilliant touch 7" LCD control
- True European Convection with Direct Air
- No-preheat options
- Hot-air frying
- Built-in WiFi powered by SmartHQ
- Never-scrub, heavy-duty, smooth-glide racks
- Self-clean oven with optional Steam Clean

- Stainless - PTS7000SNSS
- Black Stainless - PTS7000BNTS

Perfect Match Cooktops:  
PHP9036 (Induction), PP7036 (Electric),  
PGP7036 (Gas)



JTS5000  
GE 30" SMART CONVECTION  
SINGLE OVEN

- True European Convection
- Hidden backlit LCD control
- Never-scrub, heavy-duty, smooth-glide racks
- Precision temperature probe
- Self-clean oven with optional Steam Clean
- Built-in WiFi powered by SmartHQ
- 10-pass hidden bake element
- 8-pass broil element

- Stainless - JTS5000SNSS
- Slate - JTS5000ENES
- Black Slate - JTS5000FNDS
- White - JTS5000DNWW
- Black - JTS5000DNBB

Perfect Match Cooktops:  
JP5030 (Electric), JGP5030 (Gas)



JTS3000  
GE 30" SMART SINGLE OVEN

- Never-scrub, heavy-duty racks
- Self-clean oven with optional Steam Clean
- Built-in WiFi powered by SmartHQ
- Glass touch controls
- 10-pass hidden bake element
- 8-pass broil element

- Stainless - JTS3000SNSS
- Slate - JTS3000ENES
- White - JTS3000DNWW
- Black - JTS3000DNBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)




PTS700L  
GE PROFILE 30" SMART  
CONVECTION SINGLE  
OVEN WITH LEFT-HAND  
SIDE-SWING DOOR

- Swing door design
- Precision cooking modes
- Hot air frying
- No preheat options
- Built-in WiFi powered by SmartHQ
- Brilliant touch 7" display
- True European Convection with Direct Air
- Never-scrub, heavy-duty roller racks
- Precision temperature probe
- Self-clean with Steam Clean option rack

- Stainless - PTS700LSNSS

Perfect Match Cooktops:  
PP7036 (Electric), PGP7036 (Gas)




PTS700R  
GE PROFILE 30" SMART  
CONVECTION SINGLE  
OVEN WITH RIGHT-HAND  
SIDE-SWING DOOR

- Swing door design
- Precision cooking modes
- Hot air frying
- No preheat options
- Built-in WiFi powered by SmartHQ
- Brilliant touch 7" display
- True European Convection with Direct Air
- Never-scrub, heavy-duty roller racks
- Precision temperature probe
- Self-clean with Steam Clean option

- Stainless - PTS700RSNSS

Perfect Match Cooktops:  
PP7036 (Electric), PGP7036 (Gas)



PKS7000  
GE PROFILE 27" SMART  
CONVECTION SINGLE OVEN

- Brilliant touch 7" LCD control
- True European Convection
- Built-in WiFi powered by SmartHQ
- Never-scrub, heavy-duty, smooth-glide racks
- Precision temperature probe
- 10-pass hidden bake element
- 8-pass broil element
- Self-clean oven with optional Steam Clean

- Stainless - PKS7000SNSS
- Black Stainless - PKS7000BNTS

Perfect Match Cooktops:  
PP7036 (Electric), PGP7036 (Gas)



Model shown in Black Slate

JKS5000  
GE 27" SMART CONVECTION  
SINGLE OVEN

- True European Convection
- Hidden backlit LCD control
- Never-scrub, heavy-duty, smooth-glide racks
- Precision temperature probe
- Never-scrub, heavy-duty racks
- Self-clean oven with optional Steam Clean
- Built-in WiFi powered by SmartHQ
- 10-pass hidden bake element
- 8-pass broil element

- Stainless - JKS5000SNSS
- White - JKS5000DNWW
- Black - JKS5000DNBB

Perfect Match Cooktops:  
JP5030 (Electric), JGP5030 (Gas)



Complete features and specifications on pages 251-253.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA requirements.

**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



BUILT-IN SINGLE WALL OVENS



- JKS3000**  
**GE 27" SMART SINGLE OVEN**
- **Never-scrub, heavy-duty racks**
  - Self-clean oven with optional Steam Clean
  - **Built-in WiFi powered by SmartHQ™**
  - Glass touch controls
  - 10-pass hidden bake element
  - 8-pass broil element
- Stainless - JKS3000SNSS  
■ White - JKS3000DNWW  
■ Black - JKS3000DNBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)




- JRP20**  
**GE 24" ELECTRIC SINGLE OVEN**
- Self-clean oven
  - Electronic oven controls
  - Clear view window
  - Interior oven light
  - Two oven racks
- Stainless - JRP20SKSS  
■ White - JRP20WJWW  
■ Black - JRP20BJBB

**JRS06** (not shown)  
**GE 24" SINGLE OVEN**  
Similar to the JRP20, except standard-clean oven.

- Stainless - JRS06SKSS  
■ Black - JRS06BJBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)



BUILT-IN TWIN FLEX WALL OVEN



- PTS9200**  
**GE PROFILE™ 30" SMART TWIN FLEX OVEN WITH CONVECTION**
- Flexible cooking
  - Rapid preheat
  - 5.0 cu. ft. total oven capacity (2.8 lower; 2.2. upper)
  - True European Convection with Precise Air (lower oven)
  - **Built-in WiFi powered by SmartHQ**
  - **Brilliant touch 7" display**
  - Never-scrub, heavy-duty roller rack

- Stainless - PTS9200SNSS

Perfect Match Cooktops:  
PHP9030 (Induction), PGP9030 (Gas)



- JGRP20**  
**GE 24" GAS SINGLE OVEN**
- Self-clean oven
  - Electronic oven controls
  - Clear view window
  - Interior oven light
  - Two oven racks
- Stainless - JGRP20SENSS  
■ White - JGRP20WEJWW  
■ Black - JGRP20BEJBB

Perfect Match Cooktops:  
JP3030 (Electric), JGP3030 (Gas)



**PTW9000**  
**GE PROFILE 30" WARMING DRAWER**

- Variable-temperature control
- Variable-humidity control
- Frameless drawer front
- "On" indicator light
- Half rack

- Stainless - PTW9000SPSS

Perfect Match Wall Oven and Cooktops:  
PTS7000 (Single), PHP9036 (Induction), PGP9036 (Gas)



**PKW7000** (not shown)  
**GE PROFILE 27" WARMING DRAWER**  
Similar to PTW9000, except 27" wide.

- Stainless - PKW7000SPSS

Complete features and specifications on pages 253-256.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.





# BUILT-IN WALL OVENS WITH ADVANTIUM® TECHNOLOGY

## FEATURE HIGHLIGHTS



### SPEEDCOOK OVEN

Advantium cooking technology delivers oven-quality results two- to eight-times faster than a conventional oven.



### MULTIPLE COOKING FUNCTIONS

Expand your cooking versatility with Convection Oven, Microwave, Toaster Oven, Warming/Proofing Oven, and Precision Cook Oven.



### 175+ PREPROGRAMMED MENU SELECTIONS

Quickly find the selection you need with a menu that organizes dishes into 12 convenient categories.

## BUILT-IN WALL OVENS WITH ADVANTIUM TECHNOLOGY



Model shown in Slate

### PSB9240 GE PROFILE™ 30" SINGLE OVEN WITH ADVANTIUM TECHNOLOGY

- **Speedcook oven (240V)**
- Multiple cooking functions
- Halogen heat (no preheat required)
- Over 175 preprogrammed menu selections
- Custom Recipe Saver
- Allows use of UXB903SNSS storage drawer

- Stainless - PSB9240SFSS
- Black Stainless - PSB9240BLTS
- Slate - PSB9240EFES



### PSB9120 GE PROFILE 30" SINGLE OVEN WITH ADVANTIUM TECHNOLOGY

- Speedcook oven (120V)
- Multiple cooking functions
- Halogen heat (no preheat required)
- Over 175 preprogrammed menu selections
- Custom Recipe Saver
- Allows use of UXB903SNSS storage drawer
- Under-the-counter installation flexibility

- Stainless - PSB9120SFSS
- Black Stainless - PSB9120BLTS
- Slate - PSB9120EFES



### PSB9100 GE PROFILE 27" SINGLE OVEN WITH ADVANTIUM TECHNOLOGY

- Speedcook oven (120V)
- Multiple cooking functions
- Halogen heat (no preheat required)
- Over 175 preprogrammed menu selections
- Custom Recipe Saver

- Stainless - PSB9100SFSS
- Black Stainless - PSB9100BLTS
- Slate - PSB9100EFES

## ADVANTIUM PART & ACCESSORY

UXB903SNSS	
GE PROFILE SPEEDCOOK OVEN STORAGE DRAWER	
<ul style="list-style-type: none"><li>• Provides convenient storage of Advantium cookware when not in use</li><li>• Full-extension slides for easy access</li><li>• Allows for retrofit into previous SCB2000/1 wall oven cutout</li></ul>	
MODEL	
PSB9240	OPTIONAL UPGRADE
PSB9120	OPTIONAL UPGRADE





# BUILT-IN MICROWAVE OVENS

## FEATURE HIGHLIGHTS



### COMBINATION FAST COOK

Combines microwave and radiant heat for speed.



### STEAM COOK

Perfectly prepare your steamed favorites.



### MY CYCLE

Create a custom cook-time setting, and with one touch, cook your favorite dish just the way you like.

## BUILT-IN MICROWAVE OVENS



### PWB7030

#### GE PROFILE™ 30" BUILT-IN 1.7 CU. FT. CAPACITY MICROWAVE OVEN

- 975 watts (IEC-705 test procedure) and 1,500 convection watts
- Combination Fast Cook setting
- Steam cook
- Glass touch controls
- My Cycle
- Warming and proofing oven
- 120 Volts
- Convection rack

Stainless - PWB7030SLSS  
Slate - PWB7030ELES



Model shown in Gray

### PEB7227

#### GE PROFILE 30" BUILT-IN 2.2 CU. FT. CAPACITY SENSOR MICROWAVE OVEN

- 1,100 watts (IEC-705 test procedure)
- Weight and time defrost
- Extra-large 16" turntable
- Instant On controls
- Control lockout
- "Add 30 seconds" button
- Kitchen timer

#### STANDARD COMBINATIONS for PEB7227

IMPORTANT: A TRIM KIT IS REQUIRED AND MUST BE ORDERED SEPARATELY.

##### STAINLESS TRIM



#### PEB7227ANDD\*

Dark gray microwave with Stainless trim kit  
30" KIT: JX7230SLSS  
27" KIT: JX7227SLSS

##### SLATE TRIM



#### PEB7227ANDD\*

Dark gray microwave with Slate trim kit  
30" KIT: JX7230ELES  
27" KIT: JX7227ELES

##### WHITE TRIM



#### PEB7227DLWW

White microwave with White trim kit  
30" KIT: JX7230DLWW  
27" KIT: JX7227DLWW

##### BLACK STAINLESS TRIM



#### PEB7227ANDD\*

Dark gray microwave with Black Stainless trim kit  
30" KIT: JX7230BLTS  
27" KIT: JX7227BLTS

##### BLACK SLATE TRIM



#### PEB7227ANDD\*

Dark gray microwave with Black Slate trim kit  
30" KIT: JX7230FMDS  
27" KIT: JX7227FMDS

##### BLACK TRIM



#### PEB7227DLBB

Black microwave with Black trim kit  
30" KIT: JX7230DLBB  
27" KIT: JX7227DLBB



BUILT-IN CAPABLE

### PEB9159

#### GE PROFILE 1.5 CU. FT. CAPACITY CONVECTION OVEN

- 1,000 watts (IEC-705 test procedure)
- Sensor cooking controls
- Warming oven
- Optional built-in trim kit\*\* (JX9152/JX9153)
- Convection rack

Stainless - PEB9159SJSS  
Slate - PEB9159EJES  
White - PEB9159DJWW  
Black - PEB9159DJBB



Shown with trim kit PEB9159SJSS



BUILT-IN CAPABLE

### PEM31

#### GE PROFILE 1.1 CU. FT. CAPACITY SPACEMAKER® OVEN

- 800 watts (IEC-705 test procedure)
- Optional built-in trim kit\*\* (JX827/JX830)
- Optional hanging kit\*\*\* (JXA019K)
- Sensor cooking controls
- Weight and time defrost
- Turntable on/off

Stainless - PEM31SFSS  
Black Stainless - PEM31BMTS  
Slate - PEM31EFES  
Black Slate - PEM31FMDS  
White - PEM31DFWW  
Black - PEM31DFBB



Shown with trim kit PEM31SFSS

\*PEB7227ANDD - Base model used with Stainless, Black Stainless, Slate and Black Slate trim kits.

\*\*Optional trim kits available in 27" and 30" configurations, sold separately. Refer to pages 258-261 for installation options and model numbers.

\*\*\*Optional undercabinet mounting kit sold separately. Refer to page 261 for installation options and model numbers.

See page 227 for ADA requirements.  
Complete features and specifications on pages 258-261. For definitions of logos, see page 9.





# ELECTRIC COOKTOPS

## FEATURE HIGHLIGHTS



### BLACK STAINLESS FINISH

A Black Stainless cooktop finish creates a cutting-edge look in the kitchen.



### GLIDE TOUCH CONTROLS

Precisely control heat with one swipe.



### 11" 3,700-WATT ELEMENT

Rapidly boil water with our most powerful induction element.



### MULTI-ELEMENT TIMER

Manage up to five pans at once with individual timers for each element.



### SYNCBURNERS

Control two 7" elements simultaneously to evenly heat large cookware or griddles.



### POWER BOIL ELEMENT

Use different pan sizes on this single element that produces rapid, powerful heat.



### BACKLIT KNOBS

Achieve a modern look with the convenience of knob control.



### CONTROL LOCK CAPABILITY

Protects against unintended activation.




### FIT GUARANTEE

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications. See sales associate or [geappliances.com](http://geappliances.com) for details.



36" BUILT-IN INDUCTION COOKTOPS

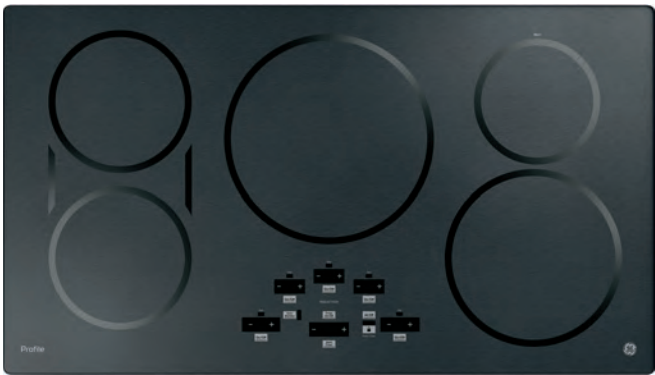

Model shown in Black Stainless



PHP9036

GE PROFILE™ 36" INDUCTION COOKTOP

- Five induction elements
- Digital touch controls
- 11" 3,700-watt induction element
- SyncBurners
- Kitchen timer
- Control lock capability
- Pan presence & size sensor
- Red LED with black glass surface
- Hot surface indicator lights
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PHP9036SJSS
- Black Stainless – PHP9036BMTS
- Black – PHP9036DJBB

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



30" BUILT-IN INDUCTION COOKTOPS



PHP9030

GE PROFILE 30" INDUCTION COOKTOP

- Four induction elements
- Digital touch controls
- 11" 3,700-watt induction element
- SyncBurners
- Kitchen timer
- Control lock capability
- Pan presence & size sensor
- Red LED with black glass surface
- Hot surface indicator lights
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PHP9030SJSS
- Black Stainless – PHP9030BMTS
- Black – PHP9030DJBB

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



Complete features and specifications on pages 262-263.  
See page 85 for electric cooktop parts & accessories.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

36" BUILT-IN ELECTRIC COOKTOPS



PP9036

GE PROFILE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- Glide touch controls
- 12"/9"/6" tri-ring element
- 8"/5" Power Boil element
- SyncBurners
- Multi-element timer
- Control lock capability
- Custom settings
- Red LED with black glass surface
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PP9036SJSS
- Black – PP9036DJBB (Beveled-edge glass)

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



Model shown in Black Stainless



PP7036

GE PROFILE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- 12"/9"/6" tri-ring element
- 8"/5" Power Boil element
- SyncBurners
- Keep warm setting
- Melt setting
- Control lock capability
- Red LED backlit knobs with black glass surface
- Hot surface indicator lights
- Cooktop "On" indicator light
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PP7036SJSS
- Black Stainless – PP7036BMTS
- Black – PP7036DJBB

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)





36" BUILT-IN ELECTRIC COOKTOPS (CONTINUED)



JP5036

GE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- **Digital touch controls**
- **12"/9"/6" tri-ring element**
- **8"/5" Power Boil element**
- **Kitchen timer**
- Keep warm setting
- Melt setting
- Control lock capability
- **Red LED with black glass surface**
- Hot surface indicator lights

- Stainless – JP5036SJSS
- Black – JP5036DJBB

Perfect Match Wall Ovens: JTD5000 (Double), JTS5000 (Single)



Model shown in White.



JP3536

GE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- 12"/9" dual element
- **8"/5" dual element**
- Keep warm setting
- Melt setting
- **Control lock capability**
- Hot surface indicator lights
- Cooktop "On" indicator light

- Stainless – JP3536SJSS
- True White – JP3536TJWW
- Black – JP3536DJBB

Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)



Model shown in Black.



JP3036

GE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- 12"/9" dual element
- 8" Power Boil element
- 6" fifth element warming zone
- Melt setting
- Hot surface indicator lights
- Cooktop "On" indicator light

- Stainless – JP3036SLSS
- True White – JP3036TLWW
- Black – JP3036DLBB

Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)



30" BUILT-IN ELECTRIC COOKTOPS



PP9030

GE PROFILE™ 30" ELECTRIC COOKTOP

- Five radiant cooking elements
- **Glide touch controls**
- 9"/6" Power Boil element
- 8"/5" dual element
- SyncBurners
- **Multi-element timer**
- Control lock capability
- **Custom settings**
- **Red LED with black glass surface**
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PP9030SJSS
- Black – PP9030DJBB (Beveled-edge glass)

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



Complete features and specifications on pages 262-263.  
See page 85 for electric cooktop parts & accessories.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



30" BUILT-IN ELECTRIC COOKTOPS (CONTINUED)



PP7030

GE PROFILE™ 30" ELECTRIC COOKTOP

- **Five radiant cooking elements**
- 9"/6" Power Boil element
- **8"/5" dual element**
- **SyncBurners**
- Keep warm setting
- Melt setting
- Control lock capability
- **Red LED backlit knobs with black glass surface**
- Hot surface indicator lights
- Cooktop "On" indicator light
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PP7030SJSS
- Black Stainless – PP7030BMTS
- Black – PP7030DJBB

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



JP5030

GE 30" ELECTRIC COOKTOP

- Four radiant cooking elements
- **Digital touch controls**
- 9"/6" Power Boil element
- **SyncBurners**
- **Kitchen timer**
- Keep warm setting
- Melt setting
- Control lock capability
- **Red LED with black glass surface**
- Hot surface indicator lights
- **Stainless steel-clad aluminum griddle—optional (JXGRIDL1)**

- Stainless – JP5030SJSS
- Black – JP5030DJBB

Perfect Match Wall Ovens: JTD5000 (Double), JTS5000 (Single)



Model shown in White.



JP3530

GE 30" ELECTRIC COOKTOP

- Four radiant cooking elements
- **9"/6" Power Boil element**
- 8" Power Boil element
- Keep warm setting
- Melt setting
- **Control lock capability**
- Hot surface indicator lights
- Cooktop "On" indicator light

- Stainless – JP3530SJSS
- True White – JP3530TJWW
- Black – JP3530DJBB

Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)



JP3030

GE 30" ELECTRIC COOKTOP

- Four radiant cooking elements
- Two 8" Power Boil elements
- Keep warm setting
- Melt setting
- Hot surface indicator lights
- Cooktop "On" indicator light

- Stainless – JP3030SJSS
- True White – JP3030TJWW
- Black – JP3030DJBB

Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)



Complete features and specifications on page 263.  
See page 85 for electric cooktop parts & accessories.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



30" BUILT-IN ELECTRIC DOWNDRAFT COOKTOPS



- PP9830**  
**GE PROFILE™ 30" ELECTRIC DOWNDRAFT COOKTOP**
- Four radiant cooking elements
  - 9"/6" Power Boil element
  - Bridge element
  - **Downdraft exhaust**
  - Control lock capability
  - Knob controls with ceramic-glass surface
  - Hot surface indicator lights
  - Cooktop "On" indicator light
- Stainless - PP9830SJSS  
■ White - PP9830TJWW  
■ Black - PP9830DJBB

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



21" BUILT-IN ELECTRIC COOKTOPS



Model shown in Black.

- JP256**  
**GE 21" ELECTRIC COOKTOP**
- Compact cooktop
  - Ceramic-glass cooktop
  - Ribbon heating elements
  - 9"/6" dual element
- Black - JP256BMBB



Model shown in Black.

- JP3021**  
**GE 21" ELECTRIC COOKTOP**
- Compact cooktop
  - Ceramic-glass cooktop
  - Ribbon heating elements
  - 9"/6" dual element
  - Melt setting
- Black - JP3021DPBB

Complete features and specifications on pages 264 and 267-268.  
See page 85 for electric cooktop parts & accessories.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

ELECTRIC COOKTOPS PARTS & ACCESSORIES



	JXTR32B/W GE COOKTOP FILLER TRIM KIT	JXGRIDL1 STAINLESS STEEL-CLAD ALUMINUM GRIDDLE
<b>MODEL</b>		• Perfect accessory for electric ranges and cooktops with SyncBurners
<b>PHP9036</b>	-	OPTIONAL UPGRADE
<b>PHP9030</b>	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
<b>PP9036</b>	-	OPTIONAL UPGRADE
<b>PP7036</b>	-	OPTIONAL UPGRADE
<b>JP5036</b>	-	-
<b>JP3536</b>	-	-
<b>JP3036</b>	-	-
<b>PP9030</b>	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
<b>PP7030</b>	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
<b>JP5030</b>	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
<b>JP3530</b>	OPTIONAL UPGRADE (JXTR32B/W)	-
<b>JP3030</b>	OPTIONAL UPGRADE (JXTR32B/W)	-
<b>PP9830</b>	-	-
<b>JP256</b>	-	-
<b>JP3021</b>	-	-

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT  
WWW.GEAPPLIANCEPARTS.COM BY USING GE PARTS ACCOUNT NUMBER.






# GAS COOKTOPS

## FEATURE HIGHLIGHTS



### TRI-RING BURNER

Three-in-one burner is designed for accelerated boiling and gentle simmering.




### EXTRA-LARGE, INTEGRATED COOKTOP GRIDDLE

Eliminate the need for extra cookware and enjoy a built-in cooking surface for pancakes, grilled cheeses and other favorites.



### HEAVY-CAST, EDGE-TO-EDGE GRATES

A large, continuous cooking surface gives you extra room for pots and pans of all sizes and lets cookware move easily from burner to burner.



### WHITE LED BACKLIT HEAVY-DUTY KNOBS

Durable knobs are backlit with white LED lighting that lends a sleek appearance and lets you know if burners are on.



### MAX BURNER SYSTEM

Delivers the same maximum BTU power to propane and natural gas cooktops.



### CONTROL LOCK CAPABILITY

Protects against unintended activation.




### 30" COOKTOP WITH 5 BURNERS

Enjoy ultimate cooktop flexibility and more cooking space with 5 sealed burners.



### SEALED COOKTOP BURNERS

Contain spills and make cleaning quick and easy.



### FIT GUARANTEE

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

See sales associate or [geappliances.com](http://geappliances.com) for details.



36" BUILT-IN GAS COOKTOPS



- PGP9036**  
**GE PROFILE™ 36" GAS COOKTOP**
- Heavy-cast, edge-to-edge grates
  - **18,000-BTU tri-ring burner**
  - White LED backlit, heavy-duty knobs
  - **Control lock capability**
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - Griddle included
  - MAX burner system

Stainless - PGP9036SLSS  
Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



- PGP7036**  
**GE PROFILE 36" GAS COOKTOP**
- Heavy-cast, edge-to-edge grates
  - **18,000-BTU Power Boil burner**
  - **White LED backlit, heavy-duty knobs**
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - Optional griddle (JXGRIDL236)
  - MAX burner system

Stainless - PGP7036SLSS  
Black Stainless - PGP7036BMTS  
Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



- JGP5536**  
**GE 36" GAS COOKTOP**
- **Gas-on-glass cooktop**
  - Sealed cooktop burners
  - 15,000-BTU Power Boil burner
  - Precise Simmer burner
  - Continuous grates
  - Control lock capability
  - Dishwasher-safe grates and knobs

Stainless - JGP5536SLSS  
Black - JGP5536DLBB  
Perfect Match Wall Ovens: JTD5000 (Double), JTS5000 (Single)




- JGP5036**  
**GE 36" GAS COOKTOP**
- **Heavy-cast, edge-to-edge grates**
  - Two 15,000-BTU Power Boil burners
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - **Optional griddle (JXGRIDL236)**
  - MAX burner system

Stainless - JGP5036SLSS  
Black - JGP5036DLBB  
Perfect Match Wall Ovens: JTD5000 (Double), JTS5000 (Single)



- JGP3036**  
**GE 36" GAS COOKTOP**
- 15,000-BTU Power Boil burner
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - Stainless steel, deep-recessed cooktop
  - MAX burner system

Stainless - JGP3036SLSS  
White - JGP3036DLWW  
Black - JGP3036DLBB  
Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)

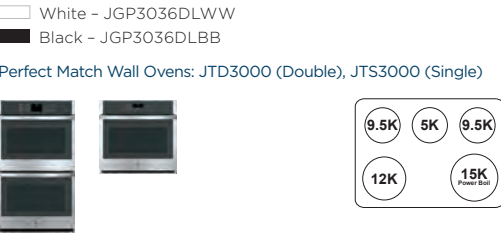

Complete features and specifications on pages 265-266.  
See page 92 for gas cooktop parts & accessories.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



30" BUILT-IN GAS COOKTOPS



PGP9030

GE PROFILE™ 30" DEEP-RECESSED GAS COOKTOP

- 30" cooktop with 5 burners
- Heavy-cast, edge-to-edge grates
- **18,000-BTU tri-ring burner**
- White LED backlit heavy-duty knobs
- **Control lock capability**
- Precise Simmer burner
- Sealed cooktop burners
- Griddle included
- MAX burner system

Stainless - PGP9030SLSS

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



JGP5030


GE 30" GAS COOKTOP

- **30" cooktop with 5 burners**
- **Heavy-cast, edge-to-edge grates**
- 15,000-BTU Power Boil burner
- Precise Simmer burner
- Sealed cooktop burners
- Heavy-duty, dishwasher-safe grates
- **Optional griddle (JXGRIDL230)**
- MAX burner system

Stainless - JGP5030SLSS

Black - JGP5030DLBB

Perfect Match Wall Ovens: JTD5000 (Double), JTS5000 (Single)



PGP7030


GE PROFILE 30" GAS COOKTOP

- 30" cooktop with 5 burners
- Heavy-cast, edge-to-edge grates
- **18,000-BTU Power Boil burner**
- **White LED backlit heavy-duty knobs**
- Precise Simmer burner
- Sealed cooktop burners
- Heavy-duty, dishwasher-safe grates
- Optional griddle (JXGRIDL230)
- MAX burner system

Stainless - PGP7030SLSS

Black Stainless - PGP7030BMTS

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)

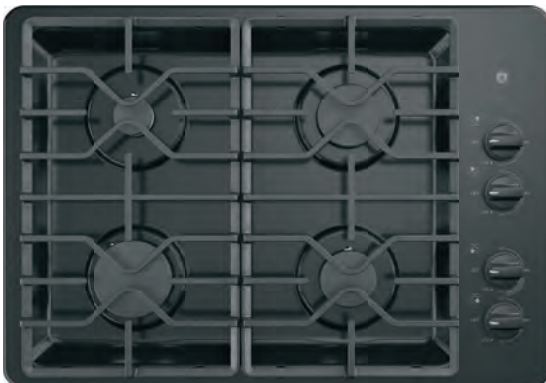

Model shown in Black.



JGP3530


GE 30" GAS COOKTOP

- **18,000-BTU Power Boil burner**
- Precise Simmer burner
- Sealed cooktop burners
- Heavy-duty, dishwasher-safe grates
- Stainless steel, deep-recessed cooktop
- MAX burner system

Stainless - JGP3530SLSS

Black - JGP3530DLBB

Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)

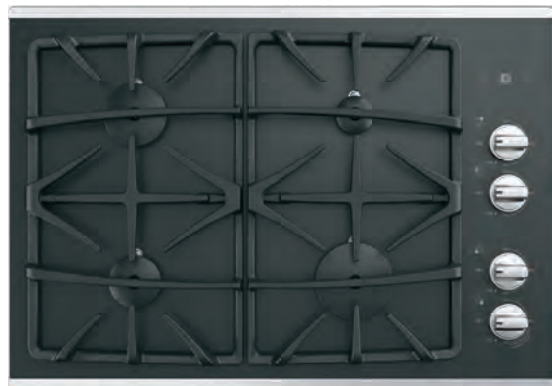

JGP5530


GE 30" GAS COOKTOP

- **Gas-on-glass cooktop**
- Sealed cooktop burners
- 15,000-BTU Power Boil burner
- Precise Simmer burner
- Continuous grates
- Dishwasher-safe grates and knobs

Stainless - JGP5530SLSS

Black - JGP5530DLBB

Perfect Match Wall Ovens: JTD5000 (Double), JTS5000 (Single)



JGP3030

GE 30" DEEP-RECESSED GAS COOKTOP


- 15,000-BTU Power Boil burner
- Precise Simmer burner
- Sealed cooktop burners
- Heavy-duty, dishwasher-safe grates
- Stainless steel, deep-recessed cooktop
- MAX burner system

Stainless - JGP3030SLSS

White - JGP3030DLWW

Black - JGP3030DLBB

Perfect Match Wall Ovens: JTD3000 (Double), JTS3000 (Single)



Complete features and specifications on pages 265-266.  
See page 92 for gas cooktop parts & accessories.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



30" BUILT-IN GAS DOWNDRAFT COOKTOP




Model shown in Black.



- PGP9830**  
**GE PROFILE™ 30" GAS DOWNDRAFT COOKTOP**
- Four gas cooking burners
  - Gas-on-glass cooktop
  - 11,500-BTU all-purpose burner
  - Downdraft exhaust
  - Sealed cooktop burners
  - Knob controls with ceramic-glass surface
  - Dishwasher-safe grates and knobs

Stainless – PGP9830SJSS  
White – PGP9830TJWW  
Black – PGP9830DJBB

Perfect Match Wall Ovens: PTD7000 (Double), PTS7000 (Single)



GAS COOKTOPS PARTS & ACCESSORIES



	JXGRIDL236	JXGRIDL230
MODEL	36" CAST-IRON GRIDDLE	30" CAST-IRON GRIDDLE
PGP9036	OPTIONAL UPGRADE	–
PGP7036	OPTIONAL UPGRADE	–
JGP5536	–	–
JGP5036	OPTIONAL UPGRADE	–
JGP3036	–	–
PGP9030	–	OPTIONAL UPGRADE
PGP7030	–	OPTIONAL UPGRADE
JGP5530	–	–
JGP5030	–	OPTIONAL UPGRADE
JGP3530	–	–
JGP3030	–	–
PGP9830	–	–

Complete features and specifications on pages 267-268.  
See page 266 for approved cooktop and wall oven combinations.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.







# VENTILATION

## FEATURE HIGHLIGHTS



### ADJUSTABLE CFM


Make code compliance easy for builders with a fan speed that can be set to high or low.



### BACKLIT CONTROLS

Attractive controls are easy to read and easy to use.

Not all features available on all models.



### BUILT-IN WIFI/ VOICE-ENABLED

Turn on the night light from anywhere using SmarthQ™ on your smartphone or the sound of your voice.\*

Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.

\*Requires compatible voice assistant. Not all features available on all models.

## DESIGNER HOODS



Model shown in Black Stainless



### UVW9361 36" SMART DESIGNER WALL-MOUNT HOOD WITH PERIMETER VENTING

- Perimeter venting
- LED backlit glass touch control
- Built-in WiFi powered by SmarthQ
- 610-CFM adjustable blower
- Triple LED dimmable lighting
- 10-ft. ceiling height
- Hidden filter venting
- Timer and clock
- Chef Connect
- Four-speed fan control
- Optional 12' and 14' duct cover accessories

Stainless - UVW9361SLSS  
Black Stainless - UVW9361BLTS

### UVW9301 (not shown) 30" SMART DESIGNER WALL-MOUNT HOOD WITH PERIMETER VENTING

Similar to UVW9361 except 30" wide

Stainless - UVW9301SLSS  
Black Stainless - UVW9301BLTS



### UVW8361 36" DESIGNER WALL-MOUNT HOOD WITH DIMMABLE LED LIGHTING

- 350-CFM blower
- Dual LED dimmable lighting
- Electronic backlit controls
- Convertible venting options
- Chef Connect
- 9-ft. ceiling height
- Dishwasher-safe filter
- Optional 10', 12' and 14' duct cover accessories

Stainless - UVW8361SLSS

### UVW8301 (not shown) 30" DESIGNER WALL-MOUNT HOOD WITH DIMMABLE LED LIGHTING

Similar to UVW8361 except 30" wide

Stainless - UVW8301SLSS

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.

Complete features and specifications on page 269. See page 227 for ADA and UFAS requirements. See pages 100-102 for ventilation parts & accessories. For definitions of logos, see page 9.



CUSTOM HOOD INSERTS



**UVW7241**  
**24" CHIMNEY VENT WITH TEMPERED GLASS**

- 450-CFM fan
- Recirculating and venting options
- Washable grease filter
- Halogen lighting
- Push-button controls
- 5.0 sones rating
- Includes chimney extension up to 16 inches

Stainless - UVW7241SNSS



**UVC9360**  
**36" SMART DESIGNER CUSTOM INSERT WITH DIMMABLE LED LIGHTING**

- 610-CFM adjustable blower
- Triple LED dimmable lighting
- Dishwasher-safe, removable-baffle stainless steel filters
- Electronic backlit controls
- Built-in WiFi powered by SmartHQ™
- Chef Connect
- Four-speed fan control

Stainless - UVC9360SLSS

**UVC9300** (not shown)  
**GE 30" SMART DESIGNER CUSTOM INSERT WITH DIMMABLE LED LIGHTING**

Similar to UVC9360 except 30" wide


Stainless - UVC9300SLSS



**UVC7300**  
**20" CUSTOM HOOD INSERT WITH DIMMABLE LED LIGHTING**

- 390-CFM blower
- Dual LED dimmable lighting
- Dishwasher-safe filter
- Convertible venting options
- Push-button controls
- Four-speed fan control
- Optional 36" and 30" hood liner accessories

Stainless - UVC7300SLSS



Complete features and specifications on pages 269–271.  
See page 227 for ADA and UFAS requirements.  
See pages 100-102 for ventilation parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.

WALL-MOUNT & ISLAND-MOUNT HOODS



**PV976**  
**GE PROFILE™ 36" WALL-MOUNT CHIMNEY HOOD**

- **450-CFM venting system**
- Push-button controls
- Variable-speed fan control
- Vertical exhaust
- Dual halogen cooktop lighting
- Night light
- Dishwasher-safe filter

Stainless - PV976NSS

**PV977** (not shown)  
**GE PROFILE 36" ISLAND-MOUNT CHIMNEY HOOD**

Similar to PV976 except island mount

Stainless - PV977NSS

**PV970** (not shown)  
**GE PROFILE 30" WALL-MOUNT CHIMNEY HOOD**

Similar to PV976 except 30" wide

Stainless - PV970NSS



Model shown in Slate

**JVW5361**  
**GE 36" WALL-MOUNT PYRAMID CHIMNEY HOOD**

- **350-CFM venting system with boost**
- Electronic backlit controls
- Dual halogen cooktop lighting
- Night light
- Convertible venting options
- Optional remote control for ADA installation (UXRC70)
- Optional 10' duct cover accessory

Stainless - JVW5361SJSS  
Black Stainless - JVW5361BJTS  
Slate - JVW5361EJES  
Black Slate - JVW5361FJDS

**JVW5301** (not shown)  
**GE 30" WALL-MOUNT PYRAMID CHIMNEY HOOD**

Similar to JVW5361 except 30" wide

Stainless - JVW5301SJSS  
Black Stainless - JVW5301BJTS  
Slate - JVW5301EJES  
Black Slate - JVW5301FJDS

COMMERCIAL & DESIGNER HOODS



**JV966**  
**GE PROFILE 36" DESIGNER HOOD**

- **590-CFM venting system**
- Four-speed fan control
- Vertical exhaust
- Dual halogen cooktop lighting
- Night light
- Removable grease filter
- Optional chimney kit (UXCH2NSS)

Stainless - JV966DSS

**JV936** (not shown)  
**GE PROFILE 30" DESIGNER HOOD**

Similar to JV966 except 30" wide

Stainless - JV936DSS



UNDER-THE-CABINET HOODS



**PVX7300**  
**GE PROFILE™ 30" UNDER-THE-CABINET HOOD**


- **Four-speed with boost, 390-CFM venting system**
- 10-minute installation
- Glass touch controls
- Dual LED lighting with nightlight (bulbs included)
- Chef Connect
- Auto-off
- Convertible venting options
- Dual full-length, dishwasher-safe stainless steel mesh filters
- Optional remote control for ADA installation (UXRC70)

■ Stainless – PVX7300SJSS  
■ Black Slate – PVX7300FJDS

**PVX7360** (not shown)  
**GE PROFILE 36" UNDER-THE-CABINET HOOD**

Similar to PVX7300 except 36" wide

■ Stainless – PVX7360SJSS  
■ Black Slate – PVX7360FJDS



**JVB36**  
**GE 30" ENERGY STAR® CERTIFIED UNDER-THE-CABINET HOOD**

- **Two-speed, 270-CFM venting system**
- 10-minute installation
- Front controls
- Dual LED lighting with nightlight (bulbs included)
- Convertible venting options
- Vertical and rear exhaust
- Dual full-length, dishwasher-safe metal mesh filters
- Optional wall switch for ADA installation

■ Stainless – JVB36SKSS  
■ Black – JVB36DKBB

**JVB30** (not shown)  
**GE 36" ENERGY STAR CERTIFIED UNDER-THE-CABINET HOOD**

Similar to JVB36 except 36" wide

■ Stainless – JVB30SKSS  
■ Black – JVB30DKBB

\*10 ft. duct cover included in box.  
Complete features and specifications on pages 272-273.  
See page 227 for ADA and UFAS requirements.  
See pages 100-102 for ventilation parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



**JVB30**  
**GE 30" UNDER-THE-CABINET HOOD**

- **Four-speed with boost 310-CFM venting system**
- 10-minute installation
- Electronic backlit controls
- Dual halogen lighting with nightlight (bulbs included)
- Auto-off
- Convertible venting options
- Dual full-length, dishwasher-safe metal mesh filters
- Optional remote control for ADA installation (UXRC70)

■ Stainless – JVB30SJSS  
■ Black Stainless – JVB30BJTS  
■ Slate – JVB30EJES  
■ White – JVB30DJWW  
■ Black – JVB30DJBB

**JVB360** (not shown)  
**GE 36" UNDER-THE-CABINET HOOD**

Similar to JVB300 except 36" wide

■ Stainless – JVB360SJSS  
■ Black Stainless – JVB360BJTS  
■ Slate – JVB360EJES\*  
■ White – JVB360DJWW  
■ Black – JVB360DJBB



**JVB3300**  
**GE 30" UNDER-THE-CABINET HOOD**

- **Two-speed, 200-CFM venting system**
- 10-minute installation
- Front controls
- Cooktop lighting (bulb included)
- Convertible venting options
- Vertical and rear exhaust
- Single dishwasher-safe metal mesh filter
- Optional wall switch for ADA installation

■ Stainless – JVB3300SJSS  
■ Slate – JVB3300EJES  
■ White – JVB3300DJWW  
■ Black – JVB3300DJBB

**JVB3240** (not shown)  
**GE 24" UNDER-THE-CABINET HOOD**

Similar to JVB3300 except 24" wide

■ Stainless – JVB3240SJSS  
■ White – JVB3240DJWW



**JVB338**  
**GE 30" STANDARD HOOD**

- 170-CFM venting system
- Vertical and rear exhaust

■ White – JVB338HWW  
■ Black – JVB338HBB

**JNB327** (not shown)  
**GE 30" NON-VENTED HOOD**

Similar to JVB338 except non-vented

■ White – JNB327HWW  
■ Bisque – JNB327HCC  
■ Black – JNB327HBB

TELESCOPIC DOWNDRAFT SYSTEM



**JVB36**  
**36" TELESCOPIC DOWNDRAFT SYSTEM**

- **370-CFM venting system**
- Variable-speed fan control
- Rises 8-1/2" above cooktop surface
- Retracts when not in use
- Separate remote raise/lower switch

■ Stainless – JVB36SKSS  
■ Black – JVB36DKBB

**JVB30** (not shown)  
**30" TELESCOPIC DOWNDRAFT SYSTEM**

Similar to JVB36 except 30" wide

■ Stainless – JVB30SKSS  
■ Black – JVB30DKBB



VENTILATION PARTS & ACCESSORIES



	UXCH	UXDC53/UXDC72	UX10DC8	UX12DC9	UX14DC9
	ELECTRONIC RANGE ACCESSORY—CHIMNEY EXTENSION KIT	RANGE HOOD 10-FT. DUCT COVER KIT	10-FT. CEILING DUCT COVER KIT	12-FT. CEILING DUCT COVER KIT	14-FT. CEILING DUCT COVER KIT
	<ul style="list-style-type: none"><li>• For use with GE 30" and 36" designer hoods</li><li>• Covers exposed duct-work running from the hood to ceilings</li><li>• GE genuine parts warranty</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 10-ft. ceiling duct cover kit is available, purchased separately</li><li>• UXDC53: one piece to be used with the supplied duct cover included in box</li><li>• UXDC72: two-piece kit to replace the supplied duct cover included in box</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 10 ft. ceiling duct cover kit is available, purchased separately</li><li>• Includes a longer chimney that replaces the original in the package</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 12 ft. ceiling duct cover kit is available, purchased separately</li><li>• Includes a longer chimney that replaces the original in the package</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 14 ft. ceiling duct cover kit is available, purchased separately</li><li>• Includes a longer chimney that replaces the original in the package</li></ul>
MODEL					
UVW9361	–	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW9301	–	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8361	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8301	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC9360	–	–	–	–	–
UVC9300	–	–	–	–	–
UVC7300	–	–	–	–	–
PV977	–	–	–	–	–
PV976	–	–	–	–	–
PV970	–	–	–	–	–
JVW5361	–	OPTIONAL UPGRADE	–	–	–
JVW5301	–	OPTIONAL UPGRADE	–	–	–
JV966	OPTIONAL UPGRADE	–	–	–	–
JV936	OPTIONAL UPGRADE	–	–	–	–
UVB36	–	–	–	–	–
UVB30	–	–	–	–	–
PVX7360	–	–	–	–	–
PVX7300	–	–	–	–	–
JVX5360	–	–	–	–	–
JVX5300	–	–	–	–	–
JVX5365	–	–	–	–	–
JVX5305	–	–	–	–	–
JVX3300	–	–	–	–	–
JVX3240	–	–	–	–	–
JV338	–	–	–	–	–
JN327	–	–	–	–	–





	JXDA22	JXMUA6	JXMUA8	JXHC1
	GE OPTIONAL DAMPER	AUTOMATIC MAKE-UP AIR DAMPER FOR 6" DUCT	AUTOMATIC MAKE-UP AIR DAMPER FOR 8" DUCT	GE CORD KIT
	<ul style="list-style-type: none"><li>• For use with GE deluxe hoods</li><li>• Allows hood to fit a standard 7" round duct</li><li>• GE genuine parts warranty</li></ul>			<ul style="list-style-type: none"><li>• Allows range hoods to be installed with a plug and receptacle instead of being hard-wired</li><li>• Ideal when upgrading from standard vent hood to Spacemaker® over-the-range microwave hoods</li><li>• Eliminates need to have an electrician come to the home when the microwave is being installed</li></ul>
MODEL				
UVW9361	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW9301	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8361	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8301	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC9360	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC9300	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC7300	–	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
PV977	–	–	–	–
PV976	–	–	–	–
PV970	–	–	–	–
JVW5361	–	OPTIONAL UPGRADE	–	–
JVW5301	–	OPTIONAL UPGRADE	–	–
JV966	–	–	OPTIONAL UPGRADE	–
JV936	–	–	OPTIONAL UPGRADE	–
UVB36	–	–	–	–
UVB30	–	–	–	–
PVX7360	–	–	–	OPTIONAL UPGRADE
PVX7300	–	–	–	OPTIONAL UPGRADE
JVX5360	–	–	–	OPTIONAL UPGRADE
JVX5300	–	–	–	OPTIONAL UPGRADE
JVX5365	–	–	–	OPTIONAL UPGRADE
JVX5305	–	–	–	OPTIONAL UPGRADE
JVX3300	–	–	–	OPTIONAL UPGRADE
JVX3240	–	–	–	OPTIONAL UPGRADE
JV338	–	–	–	OPTIONAL UPGRADE
JN327	–	–	–	OPTIONAL UPGRADE


ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.



VENTILATION PARTS & ACCESSORIES

		
	<b>JXCF72/WB02X24842</b>	<b>UXRC70/WB02X24870</b>
	RANGE HOOD CHARCOAL FILTER- 2-PACK	RANGE HOOD REMOTE CONTROL
<b>MODEL</b>		
<b>JVW5361</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE
<b>JVW5301</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE
<b>JV966</b>	-	-
<b>JV936</b>	-	-
<b>UVB36</b>	-	-
<b>UVB30</b>	-	-
<b>PVX7360</b>	-	OPTIONAL UPGRADE
<b>PVX7300</b>	-	OPTIONAL UPGRADE
<b>JVX5360</b>	-	OPTIONAL UPGRADE
<b>JVX5300</b>	-	OPTIONAL UPGRADE
<b>JVX5365</b>	-	-
<b>JVX5305</b>	-	-
<b>JVX3300</b>	-	-

		
	<b>UXN70</b>	<b>UXCF91</b>
	RECIRCULATING KIT	CHARCOAL FILTER
<b>MODEL</b>		
<b>UXDT86</b>		
		DUCT REDUCER
		• Transition piece from 8" duct cover to 6" duct cover
<b>UVW9361</b>	-	OPTIONAL UPGRADE
<b>UVW9301</b>	-	OPTIONAL UPGRADE
<b>UVW8361</b>	-	OPTIONAL UPGRADE
<b>UVW8301</b>	-	OPTIONAL UPGRADE
<b>UVC9360</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE
<b>UVC9300</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE
<b>UVC7300</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE

		
	<b>UXB630BPTS</b>	<b>UXB636BPTS</b>
	30" TELESCOPIC HOOD TRIM ACCESSORY	36" TELESCOPIC HOOD TRIM ACCESSORY
<b>MODEL</b>		
<b>UVD6301SPSS</b>	OPTIONAL UPGRADE	-
<b>UVD6301DPBB</b>	OPTIONAL UPGRADE	-
<b>UVD6361SPSS</b>	-	OPTIONAL UPGRADE
<b>UVD6361DPBB</b>	-	OPTIONAL UPGRADE

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.



REFRIGERATION

COOKING

DISHWASHERS

CLOTHES CARE

WATER SYSTEMS

AIR CONDITIONERS





# KITCHEN HUB

## KITCHEN HUB



### UVH1301

#### KITCHEN HUB

- Guided cooking app
- U+ Connect Smart Home App
- Dual camera system
- Entertainment
- Google Assistant
- Google apps
- Ventilation system

Stainless – UVH13012MSS  
 Black Stainless – UVH13013MTS  
 Black Slate – UVH13013MDS



## FEATURE HIGHLIGHTS



### GUIDED COOKING APP

Step up your cooking game with the Flavorly guided cooking app, powered by SideChef, that provides step-by-step instructions for thousands of recipes and lets you snap and store images of your favorite family recipe cards.



### SmarterHQ™ APP

Control your entire smart home from one place with a platform that lets you interact with your GE Appliances and other connected devices—like your Philips Hue lights system—and more.



### DUAL CAMERA SYSTEM

Video chat, cook live with a loved one, or snap pictures of your food and share them on social media with front-facing and overhead cameras.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.


Complete features and specifications on page 274.  
For definitions of logos, see page 9.





# DROP-IN RANGES

## FEATURE HIGHLIGHTS



### 9 5/8" POWER BOIL ELEMENT

This powerful element supplies the intense heat needed for faster boiling, sautéing and stir-frying.



### SELF-CLEAN OVEN

Self-clean allows you to spare yourself the trouble and effort it takes to scrub the oven interior. The oven does all the work!



### DUAL-ELEMENT BAKE


This top-and-bottom heating produces uniform browning and fast oven preheating.

## DROP-IN ELECTRIC RANGES



- JD630**  
**GE 30" DROP-IN RANGE**
- 9 5/8" Power Boil element
  - Self-clean oven
  - Ceramic-glass cooktop
  - Black gloss oven interior
  - Dual-element bake
  - Electronic oven controls

Stainless - JD630SFSS  
White - JD630DFWW  
Black - JD630DFBB  
Perfect Match OTR Microwave: JVM6175




- JM250**  
**GE 27" DROP-IN RANGE**
- Self-clean oven
  - Sensi-Temp Technology
  - Black gloss oven interior
  - Chrome drip bowls
  - Electronic clock and timer

White - JM250DFWW  
Black - JM250DFBB  
Perfect Match OTR Microwave: JVM3160



Model shown in White







# SLIDE-IN ELECTRIC RANGES


WITH FRONT CONTROLS

## FEATURE HIGHLIGHTS



### GUIDED COOKING

Enjoy a streamlined experience with guided cooking from Hestan Cue, a system that combines video-guided recipes with automatic range adjustments.



### IN-OVEN CAMERA

Use a heat-resistant camera and the SmartHQ™ app to monitor food from anywhere.



### COOKTOP SENSOR

Control the temperature of any induction-ready pan through a smart device or the control panel.



### INDUCTION COOKTOP TECHNOLOGY

Innovative, fast, efficient cooking.



### GLIDE TOUCH CONTROLS

Precisely control element temperature with just the swipe of a finger.



### CHEF CONNECT

Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's surface light and vent.



### BUILT-IN WIFI POWERED BY SmartHQ

Preheat the oven on the way home from soccer practice or while running errands, thanks to wireless capability that gives you control from anywhere using your smartphone.

Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### TWO 8" 2,500-WATT SYNCHRONIZED ELEMENTS

Control two 8" elements simultaneously to evenly heat large cookware or griddles.



### FIT GUARANTEE


No-preheat air fry slide-in ranges from GE Appliances are guaranteed for an exact fit to make replacement easy. See sales associate or [geappliances.com](http://geappliances.com) for details.



SLIDE-IN ELECTRIC RANGES



- PHS93X**  
**GE PROFILE™ 30" SMART SLIDE-IN FRONT CONTROL INDUCTION AND CONVECTION RANGE**
- In-oven camera
  - Precision cooktop sensor
  - Guided cooking
  - Sous-vide capability
  - Precision oven modes
  - Built-in WiFi powered by SmartHQ™
  - No-preheat air fry
  - Fingerprint Resistant Stainless
  - Fit guarantee\*




— Fingerprint Resistant Stainless - PHS93XYPFS

Perfect Match OTR Microwave: PSA9120



- PHS930**  
**GE PROFILE 30" SMART SLIDE-IN, FRONT-CONTROL INDUCTION AND CONVECTION RANGE**
- Guided cooking
  - Sous-vide capability
  - No-preheat air fry
  - Built-in WiFi powered by SmartHQ
  - Fingerprint Resistant Stainless
  - Induction cooktop
  - Glide touch controls
  - Induction technology
  - Fit guarantee\*




— Fingerprint Resistant Stainless - PHS930YPFS  
— Black Stainless - PHS930BPTS

Perfect Match OTR Microwave: PSA9120



- JSS86**  
**GE PROFILE 30" SLIDE-IN ELECTRIC CONVECTION RANGE**
- 12"/9" dual element
  - True Convection
  - 9"/6" Power Boil element
  - Fifth warming zone
  - Fast preheat
  - Steam Clean
  - Hidden bake oven interior
  - Glass touch control
  - Large-capacity double oven
  - Fit guarantee\*




— Stainless - JSS86SPSS

Perfect Match OTR Microwave: JVM7195



- JS760**  
**GE 30" SLIDE-IN CONVECTION RANGE**
- No-preheat air fry
  - 12"/9" dual element
  - True Convection with Precise Air
  - 9"/6" 3,100-watt Power Boil element
  - Fifth element warming zone
  - Fast preheat
  - Self-clean with Steam Clean option
  - Smooth-glide storage drawer
  - Hidden bake oven interior
  - Fit guarantee\*

Model shown in Slate




— Stainless - JS760SPSS  
— Slate - JS760EPES  
— Black Slate - JS760FPDS  
— White - JS760DPWW  
— Black - JS760DPBB

Perfect Match OTR Microwave: JVM7195



- PSS93**  
**GE PROFILE 30" SMART SLIDE-IN ELECTRIC CONVECTION RANGE**
- No-preheat air fry
  - Built-in WiFi powered by SmartHQ
  - Fingerprint Resistant Stainless
  - 12"/9"/6" 3,600-watt Power Boil
  - Two 8" synchronized elements
  - Glide touch controls
  - Chef Connect\*\*
  - True Convection with Precise Air
  - Steam Clean
  - Fit guarantee\*

Model shown in Black Stainless




— Fingerprint Resistant Stainless - PSS93YPFS  
— Black Stainless - PSS93BPTS

Perfect Match OTR Microwave: PSA9120



- PS960**  
**GE PROFILE 30" SMART SLIDE-IN DOUBLE OVEN CONVECTION RANGE**
- 12"/9"/6" 3,600-watt Power Boil
  - 8"/5" and 8" synchronized elements
  - Glide touch controls
  - Built-in WiFi powered by SmartHQ
  - Chef Connect\*\*
  - True Convection with Precise Air
  - Never-scrub, heavy-duty oven racks
  - Temperature probe
  - Fit guarantee\*

Model shown in Slate




— Fingerprint Resistant Stainless - PS960YPFS  
— Black Stainless - PS960BLTS

Perfect Match OTR Microwave: PVM9179



- JS645**  
**GE 30" SLIDE-IN RANGE**
- Two 9"/6" 3,100-watt Power Boil elements
  - Self-clean oven
  - 5.3 cu. ft. oven capacity
  - Dual-element bake
  - Finished sides
  - Removable full-width storage drawer
  - Stainless steel knobs
  - White LED
  - Fit guarantee\*



— Stainless - JS645SLSS  
— Slate - JS645ELES  
— Black Slate - JS645FLDS  
— White - JS645DLWW

Perfect Match OTR Microwave: JVM6175



\*See sales associate or visit [geappliances.com](http://geappliances.com) for details.  
\*\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens.  
Complete features and specifications on pages 277-278.  
See page 116 for slide-in electric range parts & accessories.  
See page 227 for ADA and UFAS requirements.

**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license.  
Other trademarks and trade names are those of their respective owners.





# SLIDE-IN GAS RANGES

## WITH FRONT CONTROLS


### FEATURE HIGHLIGHTS



**NO-PREHEAT AIR FRY**  
Cook crispier, healthier versions of your favorite foods with an air fryer built right into the oven. Best of all, it doesn't require preheating, saving you time.



**21,000-BTU TRI-RING BURNER**  
Versatile burner creates intense heat perfect for searing, frying and sautéing.



**REVERSIBLE CAST-IRON INTEGRATED GRIDDLE/GRILL**  
From grilled cheese to pancakes to quesadillas, do it all right on the cooktop.



**DUAL-PURPOSE CENTER BURNER**  
Cook your way with a round burner for steaming broccoli and an oval burner for grilling sandwiches.



**BUILT-IN WIFI POWERED BY SmarthQ™**  
Preheat the oven on the way home from soccer practice or while running errands, thanks to wireless capability that gives you control from anywhere using your smartphone.  
Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



**CHEF CONNECT**  
Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's surface light and vent.



**TRUE CONVECTION WITH PRECISE AIR**  
Accurate heat circulation ensures evenly baked foods.




**DOUBLE OVEN CAPACITY**  
An upper everyday oven preheats quickly while the larger lower oven is perfect for dinner parties and large meals.



**FIT GUARANTEE**  
Replace your old 30" free-standing range with a new 30" slide-in model. Our slide-in ranges are guaranteed for an exact fit to make replacement easy. See sales associate or [geappliances.com](http://geappliances.com) for details.



SLIDE-IN GAS RANGES



- PGS960**  
**GE PROFILE™ 30" SMART SLIDE-IN, FRONT-CONTROL GAS DOUBLE OVEN CONVECTION RANGE**
- No-preheat air fry
  - Edge-to-edge cooktop
  - 21,000-BTU tri-ring burner
  - Extra-large, integrated, reversible cast-iron grill/griddle
  - Dual-purpose center burner
  - 15,000-BTU Power Boil burner
  - Built-in WiFi powered by SmartHQ™
  - Chef Connect\*\*
  - **Large-capacity double oven**
  - True Convection
  - Fit guarantee\*

■ Fingerprint Resistant Stainless - PGS960YPFS

Perfect Match OTR Microwave: PSA9120



Model shown in Black Stainless




- PGS930**  
**GE PROFILE 30" SMART SLIDE-IN, FRONT-CONTROL RANGE**
- No-preheat air fry
  - Edge-to-edge cooktop
  - **21,000-BTU tri-ring burner**
  - **Extra-large, integrated, reversible cast-iron grill/griddle**
  - **Dual-purpose center burner**
  - 15,000-BTU Power Boil burner
  - **Built-in WiFi powered by SmartHQ**
  - **Chef Connect\*\***
  - **True Convection**
  - Fit guarantee\*

■ Fingerprint Resistant Stainless - PGS930YPFS  
■ Black Stainless - PGS930BPTS

Perfect Match OTR Microwave: PVM9179



Model shown in Slate




- JGS760**  
**GE 30" SLIDE-IN, FRONT-CONTROL CONVECTION RANGE**
- **No-preheat air fry**
  - Edge-to-edge cooktop
  - Extra-large, integrated, non-stick griddle
  - 18,000-BTU Power Boil burner
  - **Gas convection**
  - **Self-clean with Steam Clean option**
  - Smooth-glide storage drawer
  - 10,000-BTU oval burner
  - Heavy-duty, dishwasher-safe grates
  - Fit guarantee\*

■ Stainless - JGS760SPSS  
■ Slate - JGS760EPES  
■ Black Slate - JGS760FPDS  
■ White - JGS760DPWW  
■ Black - JGS760DPBB

Perfect Match OTR Microwave: JVM7195



Model shown in Slate



- JGSS66**  
**GE 30" SLIDE-IN GAS RANGE**
- Edge-to-edge cooktop
  - **Two 15,000-BTU Power Boil burners**
  - Extra-large, integrated, non-stick griddle
  - 10,000-BTU oval burner
  - **Steam clean**
  - In-oven broil
  - Smooth-glide storage drawer
  - 5.3 cu. ft. oven capacity
  - Fit guarantee\*

■ Stainless - JGSS66SELSS  
■ Slate - JGSS66EELES  
■ Black Slate - JGSS66FELDS


Perfect Match OTR Microwave: JVM6175



- P2S930**  
**GE PROFILE 30" SMART SLIDE-IN, DUAL-FUEL, FRONT-CONTROL RANGE**
- No-preheat air fry
  - Edge-to-edge cooktop
  - **21,000-BTU Tri-ring burner**
  - **Extra-large, integrated, reversible cast-iron grill/griddle**
  - **Dual-purpose center burner**
  - 15,000-BTU Power Boil burner
  - **Built-in WiFi powered by SmartHQ**
  - **Chef Connect\*\***
  - **True Convection**
  - Fit guarantee\*

■ Fingerprint Resistant Stainless - P2S930YPFS

Perfect Match OTR Microwave: PVM9179



- JGSS86**  
**GE 30" SLIDE-IN FRONT CONTROL GAS DOUBLE OVEN RANGE**
- Edge-to-edge cooktop
  - 15,000-BTU Power Boil burner
  - Extra-large, integrated non-stick griddle
  - 10,000-BTU oval burner
  - Steam Clean
  - In-oven broil
  - True Convection
  - **Large-capacity double oven**
  - Fit guarantee\*

■ Stainless - JGSS86SPSS

Perfect Match OTR Microwave: JVM7195


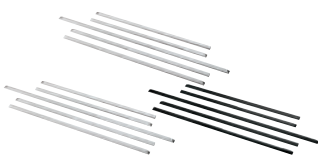


\*See sales associate or geappliances.com for details.  
\*\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens.  
Complete features and specifications on pages 279-280.  
See page 117 for slide-in gas range parts & accessories.  
See page 227 for ADA and UFAS requirements.

**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license.  
Other trademarks and trade names are those of their respective owners.








SLIDE-IN ELECTRIC RANGE PARTS & ACCESSORIES





	JXFILLR1SS/DD/BB	WB4820881 OR WB48X20862
	FILLER KIT	NEVER-SCRUB ROLLER RACK
	<ul style="list-style-type: none"><li>• Eliminates gap between counter and appliances for a seamless look</li><li>• Adheres directly to counter</li><li>• Easy to install</li><li>• Color options: Stainless, Dark Gray, Black</li></ul>	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>
MODEL		
PHS93XYPFS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
PHS930YPFS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
PHS930BPTS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
PSS93YPFS	OPTIONAL UPGRADE	—
PSS93BPTS	OPTIONAL UPGRADE	—
PS960YPFS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20862)
PS960BLTS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20862)
JSS86SPSS	OPTIONAL UPGRADE	—
JS760SPSS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS760EPES	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS760FPDS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS760DPWW	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS760DPBB	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS645SLSS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS645ELES	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS645FLDS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
JS645DLWW	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)

SLIDE-IN GAS RANGE PARTS & ACCESSORIES



	JXFILLR1SS/DD/BB	WB48X20990 OR WB48X21543	JXGRILL1 / WB31X24998	WB31X24738	JXGRATE1/ WB31X27150
	FILLER KIT	NEVER-SCRUB ROLLER RACK	REVERSIBLE CAST-IRON GRIDDLE/GRILL	NON-STICK ALUMINUM GRIDDLE	CENTER GRATE
	<ul style="list-style-type: none"><li>• Eliminates gap between counter and appliances for a seamless look</li><li>• Adheres directly to counter</li><li>• Easy to install</li><li>• Color options: Stainless, Dark Gray, Black</li></ul>	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>	<ul style="list-style-type: none"><li>• Cast iron</li><li>• Interlocks with grates</li><li>• Reversible</li></ul>	<ul style="list-style-type: none"><li>• Heavy-duty, cast-iron construction</li><li>• Interlocks with grates</li></ul>	<ul style="list-style-type: none"><li>• Middle grate</li><li>• Ideal for cooking with odd-sized cookware</li><li>• Accommodates the dual-purpose center burner</li></ul>
MODEL					
PGS960YPFS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	INCLUDED	OPTIONAL UPGRADE	INCLUDED
P2S930YPFS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20990)	INCLUDED	OPTIONAL UPGRADE	INCLUDED
PGS930YPFS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	INCLUDED	OPTIONAL UPGRADE	INCLUDED
PGS930BPTS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	INCLUDED	OPTIONAL UPGRADE	INCLUDED
JGSS86SPSS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGS760SPSS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGS760EPES	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGS760FPDS	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGS760DPWW	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGS760DPBB	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGSS66SELSS	OPTIONAL UPGRADE	—	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGSS66EELES	OPTIONAL UPGRADE	—	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE
JGS66FELDS	OPTIONAL UPGRADE	—	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE



PM15X113	PM15X103
4' UNIVERSAL GAS RANGE CONNECTION WITH AUTO SHUTOFF KIT	4' UNIVERSAL GAS RANGE INSTALLATION KIT
<ul style="list-style-type: none"><li>• Includes step-by-step instructions</li><li>• Helps prevent a hazardous buildup of gas</li><li>• For indoor and outdoor use</li></ul>	<ul style="list-style-type: none"><li>• Fits most major brands</li><li>• For indoor or outdoor use</li><li>• Easy to install</li></ul>
APPLIES TO ALL SLIDE-IN GAS RANGES	APPLIES TO ALL SLIDE-IN GAS RANGES





# FREE-STANDING ELECTRIC RANGES

## FEATURE HIGHLIGHTS



**NO-PREHEAT AIR FRY**  
With air fry right in the oven, it's easy to cook healthier, crispier foods without the grease. Plus, there's no preheat required.



**FINGERPRINT RESISTANT STAINLESS**  
Easily wipe away smudges and prints with a Stainless finish that always looks clean.



**SELF-CLEAN AND STEAM CLEAN OPTION**  
Choose Self-Clean for tough messes or Steam Clean (available on select models) for lighters soils or right after cooking.




**12"/9"/6" POWER BOIL ELEMENT**  
Every pot and pan fits perfectly on the flexible heating element, capable of delivering an industry-leading 3,600 watts of power.



**GRIDDLE ZONE**  
Create the perfect place for a griddle, grill or other large cookware with two, same-sized burners that work together to create an evenly heated griddle zone right on the cooktop.



 **CHEF CONNECT**  
Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's surface light and vent.



**BUILT-IN WIFI POWERED BY SmartHQ™**  
Preheat the oven on the way home from soccer practice or while running errands, thanks to wireless capability that gives you control from anywhere using your smartphone.



**TRUE CONVECTION WITH PRECISE AIR**  
Enjoy golden-brown, perfectly even results with a third heating element and a reversing fan that provides enhanced heat and air circulation.



**FAST PREHEAT**  
It's never long until dinner, with two heating elements that cut down on the time it takes to preheat the oven.



FREE-STANDING ELECTRIC RANGES



- PB965**  
**GE PROFILE™ 30" SMART DOUBLE OVEN RANGE WITH CONVECTION**
- No-preheat air fry
  - Built-in WiFi powered by SmartHQ™
  - Fingerprint Resistant Stainless
  - 12"/9"/6" 3,600-watt Power Boil
  - 8"/5" dual element
  - Griddle zone
  - **Chef Connect\***
  - True Convection with Precise Air
  - Fast preheat

Stainless - PB965YPFS  
Black Stainless - PB965BPTS

Perfect Match OTR Microwave: PB965BPTS



- PB935**  
**GE PROFILE 30" SMART CONVECTION RANGE**
- No-preheat air fry
  - **Built-in WiFi powered by SmartHQ**
  - Fingerprint Resistant Stainless
  - **12"/9"/6" 3,600-watt Power Boil**
  - 8"/5" dual element
  - **Griddle zone**
  - **True Convection with Precise Air**
  - Fast preheat

Fingerprint Resistant Stainless - PB935YPFS  
Black Stainless - PB935BPTS

Perfect Match OTR Microwave: PVM9215



- JB645**  
**GE 30" RANGE**
- **Two 9"/6" Power Boil elements**
  - Self-clean oven
  - Dual-element bake
  - Ceramic-glass cooktop
  - Removable full-width storage drawer
  - 5.3 cu. ft. oven capacity

Stainless - JB645RKSS  
Slate - JB645EKES  
Black Slate - JB645FKDS  
White - JB645DKWW  
Black - JB645DKBB

Perfect Match OTR Microwave: JVM3160



- JB655**  
**GE 30" CONVECTION RANGE**
- **Fingerprint resistant options**
  - **12"/9" dual element**
  - **Fan convection**
  - 9"/6" Power Boil element
  - Fifth element warming zone
  - Self-clean oven
  - 5.3 cu. ft. oven capacity
  - Removable full-width storage drawer

Stainless - JB655SKSS  
Fingerprint Resistant Stainless - JB655YKFS  
Slate - JB655EKES  
Black Slate - JB655FKDS  
White - JB655DKWW  
Black - JB655DKBB

Perfect Match OTR Microwave: JVM6175



- JBS86**  
**GE 30" DOUBLE OVEN RANGE WITH CONVECTION**
- Convection
  - 12"/9" Power Boil element
  - 9"/6" Power Boil element
  - Warming mode
  - Fifth element warming zone
  - Steam Clean

Stainless - JBS86SPSS

Perfect Match OTR Microwave: JVM7195



- JB735**  
**GE 30" CONVECTION RANGE**
- **No-preheat air fry**
  - 12"/9" dual element
  - Fan convection
  - Fast preheat
  - Fifth element warming zone
  - **Self-clean with Steam Clean option**
  - **Hidden bake element**
  - Black gloss interior

Stainless - JB735SPSS  
Slate - JB735EPES  
Black Slate - JB735FPDS  
White - JB735DPWW  
Black - JB735DPBB

Perfect Match OTR Microwave: JVM6175



- JBS60**  
**GE 30" RANGE**
- **9"/6" Power Boil element**
  - 5.3 cu. ft. oven capacity
  - Ceramic-glass cooktop
  - Removable full-width storage drawer
  - Dual-element bake

Stainless - JBS60RKSS  
White - JBS60DKWW  
Black - JBS60DKBB

Perfect Match OTR Microwave: JVM3160



- JB625**  
**GE 30" RANGE**
- 8" Power Boil element
  - 5.3 cu. ft. oven capacity
  - Ceramic-glass cooktop
  - **Self-clean oven**
  - Removable full-width storage drawer
  - Dual-element bake

Stainless - JB625RKSS  
White - JB625DKWW  
Black - JB625DKBB

Perfect Match OTR Microwave: JVM3160

\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens.

Complete features and specifications on pages 281-283.

See pages 124-125 for free-standing electric range parts & accessories.

**Bold = feature upgrade from previous model.**

For definitions of logos, see page 9.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



FREE-STANDING ELECTRIC RANGES



**JBS460**  
**GE 30" RANGE**

- **Front controls**
- 5.0 cu. ft. oven capacity
- Sensi-Temp Technology
- Dual-element bake
- Standard-clean oven
- Removable full-width storage drawer

White - JBS460DMWW  
Black - JBS460DMBB

Perfect Match OTR Microwave: JVM3160




**JB480**  
**GE 30" RANGE**

- Front controls
- 5.0 cu. ft. oven capacity
- Self-clean oven
- Dual-element bake
- Removable full-width storage drawer

Stainless - JB480SMSS  
White - JB480DMWW  
Black - JB480DMBB

Perfect Match OTR Microwave: JVM3160




**JBS160**  
**GE 30" RANGE**

- 5.0 cu. ft. oven capacity
- Standard-clean oven
- Sensi-Temp Technology
- Dual-element bake
- Removable full-width storage drawer

White - JBS160DMWW  
Bisque - JBS160DMCC  
Black - JBS160DMBB

Perfect Match Ventilation: JVX3300




**JBS360**  
**GE 30" RANGE**

- 5.0 cu. ft. oven capacity
- Standard-clean oven
- Sensi-Temp Technology
- **Electronic clock and timer**
- Removable full-width storage drawer
- Dual-element bake

Stainless - JBS360RMSS  
White - JBS360DMWW  
Black - JBS360DMBB

Perfect Match Ventilation: JVX3300



**JB256**  
**GE 30" RANGE**

- **5.0 cu. ft. oven capacity**
- **Self-clean oven**
- Sensi-Temp Technology
- Dual-element bake
- Removable full-width storage drawer

Stainless - JB256RMSS  
White - JB256DMWW  
Black - JB256DMBB

Perfect Match OTR Microwave: JVM3160




**JB258**  
**GE 30" RANGE**

- **5.3 cu. ft. oven capacity**
- **Self-clean oven**
- Sensi-Temp Technology
- Dual-element bake
- Removable full-width storage drawer

Stainless - JB258RMSS  
White - JB258DMWW  
Bisque - JB258DMCC  
Black - JB258DMBB

Perfect Match OTR Microwave: JVM3160



**JAS640**  
**GE 24" RANGE**

- Front controls
- Ceramic glass cooktop
- Steam Clean
- Modular backguard
- In-oven broil
- Large window
- Interior oven light
- Storage drawer

Stainless - JAS640RMSS






Perfect Match Ventilation: JVX3240






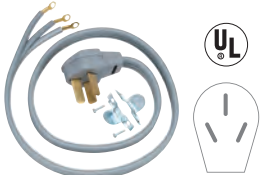
Complete features and specifications on pages 284-285.  
See page 227 for ADA and UFAS requirements.  
See pages 124-125 for free-standing electric range parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



FREE-STANDING ELECTRIC RANGE PARTS & ACCESSORIES



	<b>WB4820881 OR WB48X20862</b> NEVER-SCRUB ROLLER RACK	<b>JXRACK3E</b> SELF-CLEAN OVEN RACKS	<b>WB48X10056G</b> UNIVERSAL BROILER PAN/RACK SET	<b>GE68CC</b> GE ELECTRIC RANGE DRIP BOWLS (4-PACK)	<b>GE68PCS</b> GE ELECTRIC RANGE DRIP BOWLS (4-PACK)
	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>	<ul style="list-style-type: none"><li>• 3-pack of racks</li><li>• Fits GE 5.3 cu. ft. free-standing electric ranges</li><li>• 24" H x 17" W x 3/16" D</li></ul>	<ul style="list-style-type: none"><li>• Two-piece, porcelain-coated broiler pan set</li><li>• Use for steaks, seafood, vegetables and more</li><li>• Dishwasher-safe</li><li>• 12-3/4" x 16-1/2"</li></ul>	<ul style="list-style-type: none"><li>• Fits most Hotpoint® and GE electric ranges</li><li>• Gives electric ranges a like-new appearance</li><li>• Includes two 6" and two 8" replacement pans</li><li>• Satin-chrome finish</li></ul>	<ul style="list-style-type: none"><li>• Fits most Hotpoint and GE electric ranges</li><li>• Gives electric ranges a like-new appearance</li><li>• Includes two 6" and two 8" replacement pans</li><li>• Porcelain finish</li></ul>
<b>MODEL</b>					
<b>PB965</b>	OPTIONAL UPGRADE (WB48X20862)	—	OPTIONAL UPGRADE	—	—
<b>PB935</b>	OPTIONAL UPGRADE (WB4820881)	—	OPTIONAL UPGRADE	—	—
<b>JBS86</b>	—	—	OPTIONAL UPGRADE	—	—
<b>JB735</b>	OPTIONAL UPGRADE (WB48X20881)	—	OPTIONAL UPGRADE	—	—
<b>JB655</b>	OPTIONAL UPGRADE (WB48X20881)	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB645</b>	OPTIONAL UPGRADE (WB48X20881)	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB625</b>	OPTIONAL UPGRADE (WB48X20881)	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS60</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB480</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS460</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB258</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JB256</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS360</b>	—	—	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS160</b>	—	—	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JAS640</b>	—	—	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT



	<b>WX09X10006—4' LENGTH, 40-AMP</b> 3-WIRE ELECTRICAL RANGE CORD	<b>WX09X10035—4' LENGTH, 40-AMP</b> 4-WIRE ELECTRICAL RANGE CORD	<b>WB30X31057—8" SENSI-TEMP COIL</b>	<b>WB30X31058—6" SENSI-TEMP COIL</b>
	<ul style="list-style-type: none"><li>• 99.9% pure copper for optimal performance</li><li>• Reinforced stamped brass plug blades reduce breakage and bending</li><li>• Ring terminals provide dependable, secure installation</li><li>• Space-saving, right-angle plug design gets range closer to the wall</li><li>• Not reconditioned or repackaged</li></ul>	<ul style="list-style-type: none"><li>• 99.9% pure copper for optimal performance</li><li>• Reinforced stamped brass plug blades reduce breakage and bending</li><li>• Ring terminals provide dependable, secure installation</li><li>• Space-saving, right-angle plug design gets range closer to the wall</li><li>• Not reconditioned or repackaged</li><li>• Other lengths and amps available</li></ul>	<ul style="list-style-type: none"><li>• Same performance as traditional coil element with enhanced safety performance</li><li>• Can replace existing coils, interchangeable</li><li>• Easy to install, no tools required</li></ul>	<ul style="list-style-type: none"><li>• Same performance as traditional coil element with enhanced safety performance</li><li>• Can replace existing coils, interchangeable</li><li>• Easy to install, no tools required</li></ul>
<b>MODEL</b>				
<b>PB965</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>PB935</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS86</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB735</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB655</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB645</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB625</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS60</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB480</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS460</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JB258</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JB256</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS360</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS160</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JAS640</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—

Complete features and specifications on pages 286-287.  
See page 231 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT  
WWW.GEAPPLIANCEPARTS.COM BY USING GE PARTS ACCOUNT NUMBER.





# FREE-STANDING GAS RANGES

## FEATURE HIGHLIGHTS



### NO-PREHEAT AIR FRY

With this air fryer right in the oven, you can cook healthier, crispier versions of your favorite foods. There's no preheat required and it shortens the cook time because every minute counts.



### EDGE-TO-EDGE COOKTOP

A large, continuous cooking surface gives you extra room for pots and pans of all sizes and lets cookware move easily from burner to burner.



### EXTRA-LARGE, INTEGRATED REVERSIBLE CAST-IRON GRILL/GRIDDLE

Enjoy ultimate cooking versatility. Cook up to six grilled cheeses on the industry's largest integrated griddle, and then flip it over to grill your favorite foods.



### TRI-RING BURNER

Quickly go from gentle simmer to rapid boil with one versatile burner.



### CHEF CONNECT

Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range burners with the microwave's surface light and vent.



### BUILT-IN WIFI POWERED BY SmartHQ™

Preheat the oven on the way home from soccer practice or while running errands, thanks to wireless capability that gives you control from anywhere using your smartphone.

Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### CONVECTION

Enjoy perfectly even results with a fan on the rear wall that circulates heated air.



### POWER BOIL BURNER

Prepare foods faster with intense heat that rapidly boils liquids.



### DOUBLE OVEN CAPACITY

Family meals and holiday gatherings are easily conquered with two ovens that offer the largest total capacity in the industry.



FREE-STANDING GAS RANGES



- PGB965**  
**GE PROFILE™ 30" SMART DOUBLE OVEN RANGE WITH CONVECTION**
- No-preheat air fry
  - Reversible grill and griddle
  - True Convection
  - Synchronized clocks and lights
  - 3 oven racks
  - Center oval burner
  - Self-clean with Steam Clean
  - Heavy duty, dishwasher-safe grates
  - Tri-ring burner
  - Heavy duty, never-scrub rack
  - Built-in WiFi powered by SmartHQ™
  - Precise simmer burner
  - Large-capacity double oven

■ Fingerprint Resistant Stainless – PGB965YPFS  
■ Black Stainless – PGB965BPTS

Perfect Match OTR Microwave: PVM9215




- P2B935**  
**GE PROFILE 30" SMART DUAL-FUEL CONVECTION RANGE WITH STORAGE DRAWER**
- No-preheat air fry
  - Built-in WiFi powered by SmartHQ
  - Fingerprint Resistant Stainless
  - Dual Fuel
  - Extra-large, integrated reversible cast-iron grill/griddle
  - True Convection with Precise Air
  - 3 oven racks
  - Center oval burner

■ Fingerprint Resistant Stainless – P2B935YPFS  
■ Black Stainless – P2B935BPTS

Perfect Match OTR Microwave: PSA9120



Model shown in Slate




- JGB735**  
**GE 30" CONVECTION RANGE**
- No-preheat air fry
  - Edge-to-edge cooktop
  - Extra-large, integrated non-stick griddle
  - 18,000-BTU Power Boil burner
  - Gas convection oven
  - Self-clean with Steam Clean option
  - Center oval burner
  - Heavy-duty, dishwasher-safe grates
  - 5.0 cu. ft. oven capacity

■ Stainless – JGB735SPSS  
■ Slate – JGB735EPES  
■ Black Slate – JGB735FPDS  
■ White – JGB735DPWW  
■ Black – JGB735DPBB

Perfect Match OTR Microwave: JVM6175



Model shown in Slate



- JGB660**  
**GE 30" RANGE**
- Edge-to-edge cooktop
  - 18,000-BTU Power Boil burner
  - Center oval burner
  - Precise Simmer burner
  - Self-clean oven
  - 5.0 cu. ft. oven capacity
  - Heavy-duty, dishwasher-safe grates

■ Fingerprint Resistant Stainless – JGB660YPFS  
■ Stainless – JGB660SPSS  
■ Slate – JGB660EPES  
■ Black Slate – JGB660FPDS  
■ White – JGB660DPWW  
■ Black – JGB660DPBB


Perfect Match OTR Microwave: JVM6175



- PGB935**  
**GE PROFILE 30" CONVECTION RANGE WITH BAKING DRAWER**
- No-preheat air fry
  - Built-in WiFi powered by SmartHQ
  - Fingerprint Resistant Stainless
  - Extra-large, integrated reversible cast-iron grill/griddle
  - True Convection
  - 3 oven racks
  - Center oval burner
  - Self-clean with Steam Clean option

■ Fingerprint Resistant Stainless – PGB935YPFS  
■ Black Stainless – PGB935BPTS

Perfect Match OTR Microwave: PVM9215



- JGBS86**  
**GE 30" DOUBLE OVEN RANGE WITH CONVECTION**
- Edge-to-edge cooktop
  - 15,000-BTU Power Boil burner
  - Extra-large, integrated non-stick griddle
  - 10,000-BTU oval burner
  - Steam Clean
  - In-oven broil
  - Large-capacity double oven

■ Stainless – JGBS86SPSS

Perfect Match OTR Microwave: JVM7195




- JGB645**  
**GE 30" RANGE**
- Two-piece, continuous edge-to-edge cooktop
  - 15,000-BTU Power Boil burner
  - Precise Simmer burner
  - Self-clean oven
  - Heavy-duty, dishwasher-safe grates
  - 5.0 cu. ft. oven capacity
  - Sealed cooktop burners

■ Stainless – JGB645SEKSS

Perfect Match OTR Microwave: JVM6172



Model shown in White



- JGB450**  
**GE 30" RANGE WITH FRONT CONTROLS**
- 13,000-BTU burner
  - Black matte steel grates
  - Precise Simmer burner
  - Self-clean oven
  - Sealed cooktop burners
  - In-oven broil
  - 5.0 cu. ft. oven capacity
  - Porcelain upswept cooktop

■ White – JGB450DEKWW

Perfect Match OTR Microwave: JVM3160



Complete features and specifications on pages 286-289.  
See pages 132-133 for free-standing gas range parts & accessories.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



FREE-STANDING GAS RANGES



**JGB635**  
**GE 30" RANGE**

- 13,000-BTU burner
- Black matte steel grates
- Precise Simmer burner
- Self-clean oven
- 5.0 cu. ft. oven capacity
- Sealed cooktop burners
- In-oven broil

■ Stainless - JGB635REKSS  
□ White - JGB635DEKWW  
■ Black - JGB635DEKBB

Perfect Match OTR Microwave: JVM3160




**JGBS66**  
**GE 30" RANGE WITH BROILER DRAWER**

- Edge-to-edge cooktop
- Extra-large, integrated non-stick griddle
- 15,000-BTU Power Boil burner
- Center oval burner
- Steam Clean
- Precise Simmer burner
- Heavy-cast, dishwasher-safe grates
- 5.0 cu. ft. oven capacity
- Sealed cooktop burners

■ Stainless - JGBS66REKSS  
■ Slate - JGBS66EEKES  
■ Black Slate - JGBS66FEKDS  
□ White - JGBS66DEKWW  
■ Black - JGBS66DEKBB

Perfect Match OTR Microwave: JVM3160




**JGBS30**  
**GE 30" RANGE**

- 13,000-BTU burner
- Big view window
- Precise Simmer burner
- Sealed cooktop burners
- Black gloss steel grates
- 4.8 cu. ft. oven capacity

■ Stainless - JGBS30REKSS  
□ White - JGBS30DEKWW  
■ Black - JGBS30DEKBB

Perfect Match OTR Microwave: JVM3160



**JGBS10**  
**GE 30" RANGE WITH BROILER DRAWER**


- 4.8 cu. ft. oven capacity
- Standard-clean oven
- Flexible broiling
- Black gloss steel grates
- Sealed cooktop burners

□ White - JGBS10DEMWW  
■ Black - JGBS10DEMBB

Perfect Match Ventilation: JVX3300



Model shown in White



**JGBS61**  
**GE 30" RANGE**

- Continuous grates
- 13,000-BTU burner
- Precise simmer burner
- Sealed cooktop burners
- Black matte steel, cast iron grates
- Standard-clean oven
- 4.8 cu. ft. oven capacity
- Flexible broiling

■ Stainless - JGBS61RPSS  
□ White - JGBS61DPWW  
■ Black - JGSB61DPBB

Perfect Match OTR Microwave: JVM3160



**JGBS60**  
**GE 30" RANGE WITH BROILER DRAWER**

- 13,000-BTU burner
- Precise Simmer burner
- Sealed cooktop burners
- Black matte steel grates
- Standard-clean oven
- 4.8 cu. ft. oven capacity
- Flexible broiling

■ Stainless - JGBS60REKSS  
□ White - JGBS60DEKWW  
■ Bisque - JGBS60DEKCC  
■ Black - JGBS60DEKBB

Perfect Match OTR Microwave: JVM3160



Model shown in White




**JGAS640**  
**GE 24" RANGE**

- Front controls
- Edge-to-edge cooktop with heavy-cast grates
- In-oven broil
- Sealed cooktop burners
- Steam Clean
- Modular backguard

■ Stainless - JGAS640RMSS






Perfect Match Ventilation: JVX3240







Complete features and specifications on pages 288-289.  
See pages 132-133 for free-standing gas range parts & accessories.  
See page 227 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



FREE-STANDING GAS RANGE PARTS & ACCESSORIES

					
	<b>JXGRILL1/ WB31X24998</b> REVERSIBLE CAST-IRON GRIDDLE/GRILL <ul style="list-style-type: none"><li>• Cast iron</li><li>• Interlocks with grates</li><li>• Reversible</li></ul>	<b>WB31X24738</b> NON-STICK ALUMINUM GRIDDLE <ul style="list-style-type: none"><li>• Heavy-duty, cast-iron construction</li><li>• Interlocks with grates</li></ul>	<b>JXGRATE1/ WB31X27150</b> CENTER GRATE <ul style="list-style-type: none"><li>• Middle grate</li><li>• Ideal for cooking with odd-sized cookware</li><li>• Accommodates the dual-purpose center burner</li></ul>	<b>JXRACK3G*</b> SELF-CLEAN OVEN RACKS—3 PACK <ul style="list-style-type: none"><li>• 3-pack of racks</li><li>• 23" H x 15-1/2" W x 3/16" D</li><li>• Works with both self-clean and Steam Clean settings</li></ul>	<b>WB48X20990 OR WB48X21543</b> NEVER-SCRUB ROLLER RACK <ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>
MODEL					
PGB965	INCLUDED	OPTIONAL UPGRADE	INCLUDED	OPTIONAL/ REPLACEMENT	INCLUDED
P2B935	INCLUDED	OPTIONAL UPGRADE	INCLUDED	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X20990)
PGB935	INCLUDED	OPTIONAL UPGRADE	INCLUDED	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGBS86	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB735	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB660	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB645	—	—	—	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB450	—	—	—	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB635	—	—	—	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGBS66	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	*	—
JGBS61	—	—	—	—	—
JGBS60	—	—	—	—	—
JGBS30	—	—	—	—	—
JGBS10	—	—	—	—	—
JGAS640	—	—	—	—	—

\*For more information, see product specs.

			
<b>WB48X10056</b> UNIVERSAL BROILER PAN/RACK SET <ul style="list-style-type: none"><li>• Two piece, porcelain-coated</li><li>• Dishwasher-safe</li><li>• 12-3/4" x 16-1/2"</li></ul>	<b>WB48X5108</b> ROASTING RACK <ul style="list-style-type: none"><li>• Designed to accompany universal broiler pan (WB48X10056G and WB48X10056)</li><li>• Raised rack design allows juices to flow away from the food</li></ul>	<b>PM15X113</b> 4' UNIVERSAL GAS RANGE CONNECTION WITH AUTO SHUTOFF KIT <ul style="list-style-type: none"><li>• Includes step-by-step instructions</li><li>• Helps prevent a hazardous buildup of gas</li><li>• For indoor and outdoor use</li></ul>	<b>PM15X103</b> 4' UNIVERSAL GAS RANGE INSTALLATION KIT <ul style="list-style-type: none"><li>• Fits most major brands</li><li>• For indoor or outdoor use</li><li>• Easy to install</li></ul>
APPLIES TO ALL FREE-STANDING GAS RANGES	APPLIES TO ALL FREE-STANDING GAS RANGES	APPLIES TO ALL FREE-STANDING GAS RANGES	APPLIES TO ALL FREE-STANDING GAS RANGES

Complete features and specifications on pages 290-291.  
See page 231 for ADA and UFAS requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT  
WWW.GEAPPLIANCEPARTS.COM BY USING GE PARTS ACCOUNT NUMBER.





# OVER-THE-RANGE OVENS

## FEATURE HIGHLIGHTS

### ADVANTIUM® OVENS




#### SPEEDCOOK OVEN

Impress last-minute dinner guests with Advantium cooking technology that delivers oven-quality results two- to eight-times faster than a conventional oven.




#### MULTIPLE COOKING FUNCTIONS

Expand your cooking versatility with Convection Oven, Microwave, Toaster Oven, Warming/Proofing Oven, and Precision Cook Oven options all in one oven.



#### NO PREHEATING REQUIRED

Start cooking as soon as inspiration strikes with powerful halogen bulbs that produce nearly instantaneous heat and eliminate preheating.



#### CUSTOM RECIPE SAVER

Favorite recipes are always close at hand with a feature that allows you to store cooking instructions for up to 30 different dishes.



#### 175+ PREPROGRAMMED MENU SELECTIONS

Quickly find the selection you need with a menu that organizes dishes into 12 convenient categories.



#### BACKLIT CONTROLS

Digital readouts are easy to read and maintain a modern appearance.

### MICROWAVE OVENS



#### SENSOR COOKING CONTROLS

Automatically adjust time and power for delicious cooking results.



#### STEAM CLEAN

Messes inside the microwave are easy to wipe away after steam loosens food grime.



#### CONVECTION

Choose this setting when baking or browning is desired.



OVER-THE-RANGE OVENS WITH ADVANTIUM® TECHNOLOGY



**PSA9240**  
**GE PROFILE™ 1.7 CU. FT. CAPACITY OVEN WITH ADVANTIUM TECHNOLOGY**

- **Speedcook oven (240V)**
- Multiple cooking functions
- No preheating required
- Over 175 preprogrammed menu selections
- Custom Recipe Saver
- Backlit controls
- **Speedcooking grill tray**
- Three-speed, 300-CFM venting system

■ Stainless – PSA9240SFSS



**PSA9120**  
**GE PROFILE 1.7 CU. FT. CAPACITY OVEN WITH ADVANTIUM TECHNOLOGY**

- **Speedcook oven (120V)**
- **Multiple cooking functions**
- **No preheating required**
- **Over 175 preprogrammed menu selections**
- **Custom Recipe Saver**
- **Backlit controls**
- Three-speed, 300-CFM venting system

■ Stainless – PSA9120SFSS

OVER-THE-RANGE MICROWAVE OVENS



**PVM9179**  
**GE PROFILE 1.7 CU. FT. CAPACITY CONVECTION OVEN**

- 950 watts (IEC-705 test procedure)
- **Fast Cook**
- Sensor cooking controls
- Chef Connect
- LED cooktop lighting
- Easy-clean interior with steam clean
- **Convection rack**
- My Cycle

■ Stainless – PVM9179SKSS      ■ Black Slate – PVM9179FLDS  
■ Black Stainless – PVM9179BLTS      ■ White – PVM9179DKWW  
■ Slate – PVM9179EKES      ■ Black – PVM9179DKBB



**PVM9005**  
**GE PROFILE 2.1 CU. FT. CAPACITY SENSOR OVEN**

- 1,050 watts (IEC-705 test procedure)
- Chef Connect
- **Bottom control with integrated handle**
- Four-speed, 400-CFM venting system
- 10 power levels
- “Add 30 seconds” button

■ Stainless – PVM9005SJSS  
■ Black Stainless – PVM9005BLTS  
■ Slate – PVM9005EJES  
■ Black Slate – PVM9005FMDS



**PVM9215**  
**GE PROFILE 2.1 CU. FT. CAPACITY SENSOR OVEN**

- 1,000 watts (IEC-705 test procedure)
- Easy-clean interior with steam clean
- **Chef Connect**
- Weight and time defrost
- **LED cooktop lighting**
- **Four-speed with boost, 400-CFM venting system**
- **My Cycle**
- Turntable on/off

■ Stainless – PVM9215SKSS      ■ Stainless – PNM9216SKSS



**JVM7195**  
**GE 1.9 CU. FT. CAPACITY SENSOR OVEN**

- 1,000 watts (IEC-705 test procedure)
- **Easy-clean interior with steam clean**
- Melt
- Weight and time defrost
- **Four-speed, 400-CFM venting system**
- Turntable on/off

■ Stainless – JVM7195SKSS      ■ Stainless – JNM7196SKSS  
■ Black Stainless – JVM7195BLTS      ■ Black Stainless – JNM7196BLTS  
■ Slate – JVM7195EKES      ■ Black Slate – JNM7196FLDS  
■ Black Slate – JVM7195FLDS      ■ White – JNM7196DKWW  
■ White – JVM7195DKWW      ■ Black – JNM7196DKBB  
■ Black – JVM7195DKBB

RECIRCULATING MODELS

Complete features and specifications on pages 290-293.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



OVER-THE-RANGE MICROWAVE OVENS



JVM6175  
GE 1.7 CU. FT. CAPACITY SENSOR OVEN

- Fingerprint resistant options
- 1,000 watts (IEC-705 test procedure)
- **Weight and time defrost**
- “Add 30 seconds” button
- Melt
- Two-speed, 300-CFM venting system
- Turntable on/off

- Stainless - JVM6175SKSS
- Fingerprint Resistant Stainless - JVM6175YKFS
- Black Stainless - JVM6175BLTS
- Slate - JVM6175EKES
- White - JVM6175DKWW
- Black - JVM6175DKBB



JVM6172  
GE 1.7 CU. FT. CAPACITY OVEN

- 1,000 watts (IEC-705 test procedure)
- Convenience cooking controls
- “Add 30 seconds” button
- Weight and time defrost
- **Turntable on/off**
- Two-speed, 300-CFM venting system
- 10 power levels

- Stainless - JVM6172SKSS
- White - JVM6172DKWW
- Black - JVM6172DKBB



CONTRACT FOCUS

JVM3162  
GE 1.6 CU. FT. CAPACITY OVEN

- 950 watts (IEC-705 test procedure)
- Convenience cooking controls
- Auto and time defrost
- Turntable on/off
- Two-speed, 300-CFM venting system
- “Add 30 seconds” button
- 10 power levels

- Stainless/Black - JVM3162RJSS
- White - JVM3162DJWW
- Black - JVM3162DJBB
- Stainless/Black - JNM3163RJSS
- White - JNM3163DJWW
- Black - JNM3163DJBB



JVM3160  
GE 1.6 CU. FT. CAPACITY OVEN

- **1,000 watts (IEC-705 test procedure)**
- Convenience cooking controls
- Auto and time defrost
- Turntable on/off
- Two-speed, 300-CFM venting system

- Stainless/Black - JVM3160RFSS
- Slate - JVM3160EFES
- White - JVM3160DFWW
- Bisque - JVM3160DFCC
- Black - JVM3160DFBB

ADVANTIUM® AND MICROWAVE  
PARTS & ACCESSORIES



	JX36	JX15BUMP
	36" FILLER KIT	15" CABINETY BUMP OUT KIT
	<ul style="list-style-type: none"><li>• Microwave Filler Kit to allow a standard 30" microwave to fit into a 36" opening</li><li>• Parts included: 2 trim kit side mounts, 2 installation screws, 1 connection bar</li></ul>	<ul style="list-style-type: none"><li>• Wall bracket that extends the unit forward by 3"</li><li>• To be used for any 13"-16" cabinets that are deeper than specified</li><li>• Approximate dimensions are 30"W x 16.25"H x 3"D</li></ul>
MODEL		
PSA9240SFSS	JX36BSS	JX15BUMPBB
PSA9120SFSS	JX36BSS	JX15BUMPBB
PVM9179BLTS	JX36BTS	JX15BUMPBB
PVM9179SKSS	JX36BSS	JX15BUMPBB
PVM9179EKES	JX36BES	JX15BUMPBB
PVM9179DKWW	JX36BWW	JX15BUMPWW
PVM9179DKBB	JX36BBB	JX15BUMPBB
PVM9005BLTS		JX15BUMPBB
PVM9005JSS		JX15BUMPBB
PVM9005EJES		JX15BUMPBB
PVM9215SKSS	JX36BSS	JX15BUMPBB
PNM9216SKSS	JX36BSS	JX15BUMPBB
JNM7196BLTS	JX36BTS	JX15BUMPBB
JNM7196SKSS	JX36BSS	JX15BUMPBB
JNM7196DKWW	JX36BWW	JX15BUMPWW
JNM7196DKBB	JX36BBB	JX15BUMPBB
JVM7195BLTS	JX36BTS	JX15BUMPBB
JVM7195SKSS	JX36BSS	JX15BUMPBB
JVM7195EKES	JX36BES	JX15BUMPBB
JVM7195DKWW	JX36BWW	JX15BUMPWW
JVM7195DKBB	JX36BBB	JX15BUMPBB
JVM6175BLTS	JX36BTS	JX15BUMPBB
JVM6175SKSS	JX36BSS	JX15BUMPBB
JVM6175EKES	JX36BES	JX15BUMPBB
JVM6175DKWW	JX36BWW	JX15BUMPWW
JVM6175DKBB	JX36BBB	JX15BUMPBB
JVM6172SKSS	JX36BSS	JX15BUMPBB
JVM6172DKWW	JX36BWW	JX15BUMPWW
JVM6172DKBB	JX36BBB	JX15BUMPBB
JNM3163RJSS	JX36BSS	JX15BUMPBB
JNM3163DJWW	JX36BWW	JX15BUMPWW
JNM3163DJBB	JX36BBB	JX15BUMPBB
JVM3162RJSS	JX36BSS	JX15BUMPBB
JVM3162DJWW	JX36BWW	JX15BUMPWW
JVM3162DJBB	JX36BBB	JX15BUMPBB
JNM3161MFSA	JX36B	JX15BUMPBB
JVM3160RFSS	JX36B	JX15BUMPBB
JVM3160EFES	JX36B	JX15BUMPBB
JVM3160DFWW	JX36B	JX15BUMPWW
JVM3160DFCC	JX36B	
JVM3160DFBB	JX36B	JX15BUMPBB





# COUNTERTOP MICROWAVE OVENS

## FEATURE HIGHLIGHTS



### SENSOR COOKING CONTROLS

Automatically adjusts time and power for delicious cooking results.



### CONVECTION/ COMBINATION COOKING

Combines microwave with traditional radiant heat to bake and roast foods with accuracy.



### SPACEMAKER® OVEN

Space-saving design frees up counter space.



### PES7227 GE PROFILE™ 2.2 CU. FT. CAPACITY SENSOR OVEN

- **1,100 watts (IEC-705 test procedure)**
- Weight and time defrost
- Extra-large 16" turntable
- Instant On controls
- Control lockout
- "Add 30 seconds" button
- Kitchen timer

- Stainless - PES7227SLSS
- Black Stainless - PES7227BLTS
- Slate - PES7227ELES
- Black Slate - PES7227FMDS
- White - PES7227DLWW
- Black - PES7227DLBB

FOR COUNTERTOP APPLICATION ONLY.  
FOR BUILT-IN ONLY USE PEB7227 - SEE PAGE 77.



### JES2251 GE PROFILE 2.2 CU. FT. CAPACITY INVERTER OVEN

- 1,200 watts (IEC-705 test procedure)
- Sensor cooking controls
- Full stainless steel exterior
- Auto and time defrost
- **Warming oven**
- Extra-large 16" turntable
- Instant On controls
- Control lockout

- Stainless - JES2251SJSS



### JES2051 GE 2.0 CU. FT. CAPACITY SENSOR OVEN

- **1,200 watts (IEC-705 test procedure)**
- Auto and time defrost
- Extra-large 16" turntable
- Instant On controls
- Control lockout
- Timer on/off

- Stainless - JES2051SNSS
- White - JES2051DNWW
- Black - JES2051DNBB



### JES1657 GE 1.6 CU. FT. CAPACITY SENSOR OVEN

- **1,150 watts (IEC-705 test procedure)**
- Weight and time defrost
- Turntable
- Instant On controls
- Control lockout
- Timer on/off

- Stainless - JES1657SMSS
- Black Stainless - JES1657BMTS
- White - JES1657DMWW
- Black - JES1657DMBB

Complete features and specifications on pages 294-295.  
See page 227 for ADA and UFAS requirements. Note: Model can be ADA/UFAS compliant in countertop or built-in configuration.  
For built-in, please see installation information for individual models.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



COUNTERTOP MICROWAVE OVENS



Model shown in White

**JES1460**  
**GE 1.4 CU. FT. CAPACITY SENSOR OVEN**  
• **1,100 watts (IEC-705 test procedure)**

- Weight and time defrost
- Turntable
- Instant On controls
- Control lockout
- Timer on/off

White - JES1460DSWW  
Black - JES1460DSBB



**JES1145**  
**GE 1.1 CU. FT. CAPACITY OVEN**  
• **950 watts (IEC-705 test procedure)**

- Convenience cooking controls
- Weight and time defrost
- Turntable
- Instant On controls
- Control lockout
- Kitchen timer

Stainless - JES1145SHSS  
White - JES1145DLWW  
Black - JES1145DMBB



**JES1072**  
**GE 0.7 CU. FT. CAPACITY OVEN**  
• 700 watts (IEC-705 test procedure)

- Convenience cooking controls
- Auto and time defrost
- Turntable
- Control lockout
- Kitchen timer
- Instant On controls

Stainless - JES1072SHSS  
White - JES1072DMWW  
Black - JES1072DMBB



Model shown in White

**JEM3072**  
**GE 0.7 CU. FT. CAPACITY SPACEMAKER® OVEN**  
• 700 watts (IEC-705 test procedure)

- **Optional hanging kit\* (JXA019K)**
- Convenience cooking controls
- Auto and time defrost
- Turntable
- Instant On controls
- Control lockout

Stainless - JEM3072SHSS  
White - JEM3072DHWW  
Black - JEM3072DHBB



**JES1097**  
**GE 0.9 CU. FT. CAPACITY SMART OVEN WITH SCAN-TO-COOK TECHNOLOGY**  
• 900 watts (IEC-705 test procedure)

- Convenience cooking controls
- Auto and time defrost
- Turntable
- Control lockout
- Kitchen timer

Stainless - JES1097SMSS



Model shown in Black Stainless

**JES1095**  
**GE 0.9 CU. FT. CAPACITY OVEN**  
• **900 watts (IEC-705 test procedure)**

- **Convenience cooking controls**
- **Auto and time defrost**
- **Turntable**
- **Control lockout**
- **Kitchen timer**

Stainless - JES1095SMSS  
Black Stainless - JES1095BMTS  
White - JES1095DMWW  
Black - JES1095DMBB

Complete features and specifications on pages 294-295.  
\*Optional undercabinet mounting kit sold separately. Refer to page 295 for installation options.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.





# DISHWASHERS



## NICE AND CLEAN

Expect table-ready dishes after every cycle, thanks to a new level of washing and drying power from GE Appliances & GE Profile™. Plus, a wide range of finishes and configurations ensure the right look and fit for any kitchen.



PDP715SBNTS—See pg. 150.



PDT715SBNTS—See pg. 150.



GDP645SYNFS—See pg. 151.



GDT665SMNES—See pg. 151.



GDT630PFMDS—See pg. 152.



GDF630PSMSS—See pg. 154.



GDF645SSNSS—See pg. 153.



UCG1520NSS—See pg. 157.





# BUILT-IN DISHWASHERS


## FEATURE HIGHLIGHTS



**DRY BOOST™**  
Using Dry Boost provides up to three times better drying.\*  
\*Compared to heated dry option.



**DEEP CLEAN SILVERWARE JETS**  
Producing table-ready silverware, powerful jets are directed to the locations where the silverware baskets can be placed.



**TWIN TURBO DRY BOOST**  
Ensure a complete dry with every cycle, thanks to a dual fan system and inline heater that provide exceptional performance, even with plastics.



**LEAK DEFENSE WITH ACTIVE FLOOD PROTECT**  
Uncommon leaks can be easily detected and contained.



**PIRANHA™ HARD-FOOD DISPOSER WITH REMOVABLE FILTER**  
To ensure consistently clean items, this stainless steel blade rotates at 3,600 RPM to pulverize food particles.




**BOTTLE JETS**  
Hard-to-reach areas inside tall items are now reachable, thanks to dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean.



**THIRD RACK**  
Easily clean an entire flatware collection, knives and small utensils with a one-piece customizable rack that glides smoothly.



**WASH ZONES**  
Wash a true half-load in either the upper or lower rack without sacrificing options and cycles available on a full wash.



**BUILT-IN WIFI**  
Monitor performance, check status and automatically reorder detergent using your mobile device.  
Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



BUILT-IN HIDDEN CONTROLS DISHWASHERS



Model shown in Black Stainless



Third Rack included

- PDT785S**  
**GE PROFILE™ STAINLESS STEEL INTERIOR SMART DISHWASHER**
- **Twin Turbo Dry Boost™**
  - **Built-in WiFi powered by SmartHQ™**
  - Deep Clean Silverware Jets
  - Leak Defense with Active Flood Protect
  - Bottle Jets
  - **Third Rack**
  - Piranha™ hard-food disposer
  - 1-Hour Wash
  - Steam + Sani
  - 16 place settings
  - **39 dBA**
- Fingerprint Resistant Stainless – PDT785SYNFS  
■ Black Stainless – PDT785SBNTS




Model shown in Black Stainless



Third Rack sold separately\*\*

- PDT775S**  
**GE PROFILE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- **Twin Turbo Dry Boost**
  - **Built-in WiFi powered by SmartHQ**
  - Deep Clean Silverware Jets
  - Leak Defense with Active Flood Protect
  - Bottle Jets
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Steam + Sani
  - 16 place settings
  - **42 dBA**
- Fingerprint Resistant Stainless – PDT775SYNFS  
■ Black Stainless – PDT775SBNTS

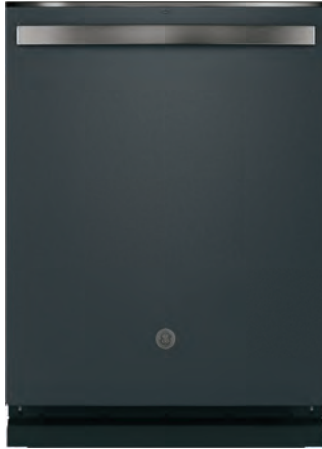

Model shown in Black Slate




Third Rack included

- GDT665S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - Bottle Jets
  - **Third Rack**
  - Steam + Sani
  - 1-Hour Wash
  - **Adjustable full-extension, smooth-glide upper rack**
  - AutoSense cycle
  - 16 place settings
  - WiFi optional\*
  - 46 dBA
- Stainless – GDT665SSNSS  
■ Slate – GDT665SMNES  
■ Black Slate –GDT665SFNDS  
■ White – GDT665SGNWW  
■ Black – GDT665SGNBB



Third Rack included

- GDP665S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - Bottle Jets
  - **Third Rack**
  - Steam + Sani
  - 1-Hour Wash
  - **Adjustable full-extension, smooth-glide upper rack**
  - AutoSense cycle
  - 16 place setting
  - WiFi optional\*
  - 46 dBA
- Fingerprint Resistant Stainless – GDP665SYNFS

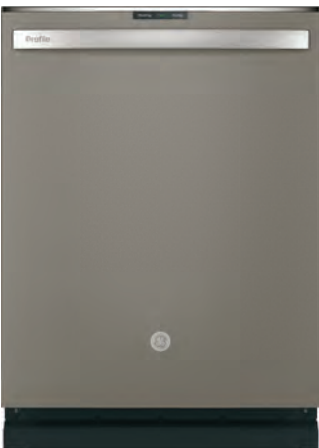

Model shown in Slate




Third Rack included

- PDT715S**  
**GE PROFILE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Deep Clean Silverware Jets**
  - Bottle Jets
  - Third Rack
  - Steam + Sani
  - Piranha hard-food disposer
  - Lower rack multi-position, fold-down tines
  - Adjustable full-extension smooth-glide upper rack
  - 16 place settings
  - WiFi optional\*
  - **45 dBA**
- Fingerprint-Resistant Stainless – PDT715SYNFS  
■ Black Stainless –PDT715SBNTS  
■ Slate – PDT715SMNES  
■ Black Slate –PDT715SFNDS



Third Rack included

- PDP715S**  
**GE PROFILE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Deep Clean Silverware Jets**
  - Bottle Jets
  - Third Rack
  - Steam + Sani
  - Piranha hard-food disposer
  - Lower rack multi-position, fold-down tines
  - Adjustable full-extension smooth-glide upper rack
  - 16 place settings
  - WiFi optional\*
  - **45 dBA**
- Fingerprint-Resistant Stainless – PDP715SYNFS  
■ Black Stainless – PDP715SBNTS



Third Rack included

- GDT645S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Bottle Jets**
  - Wash Zones
  - Steam + Sani
  - 1-Hour Wash
  - Manual + adjustable upper rack
  - Piranha hard-food disposer
  - AutoSense cycle
  - 16 place settings
  - WiFi optional\*
  - 48 dBA
- Stainless – GDT645SSNSS  
■ Fingerprint Resistant Stainless – GDT645SYNFS  
■ Slate – GDT645SMNES  
■ Black Slate –GDT645SFNDS  
■ White – GDT645SGNWW  
■ Black – GDT645SGNBB



Third Rack included

- GDP645S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Bottle Jets**
  - Wash Zones
  - Steam + Sani
  - 1-Hour Wash
  - Manual + adjustable upper rack
  - Piranha hard-food disposer
  - AutoSense cycle
  - 16 place settings
  - WiFi optional\*
  - 48 dBA
- Fingerprint-Resistant Stainless – GDP645SYNFS

See page 227 for Accessibility Requirements.  
Complete features and specifications on pages 296-298.

**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
\*\*Optional Third Rack sold separately.



BUILT-IN HIDDEN CONTROLS DISHWASHERS



**GDT565S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**

- Dry Boost™
- Clean touch controls
- Piranha™ hard-food disposer
- Steam + Sani
- Nylon racks
- Heavy Wash
- Active Flood Protect
- 1-Hour Wash
- 14 place settings
- WiFi optional\*
- 50 dBA


Stainless – GDT565SSNSS



**GDT635H**  
**GE HYBRID STAINLESS STEEL INTERIOR SMART DISHWASHER**

- **Built-in WiFi powered by SmartHQ™**
- Dry Boost
- 4 Bottle Jets
- Steam + Sani
- Wash Zones
- Three-level 600 Series wash system
- Manual + adjustable upper rack
- Piranha hard-food disposer
- 1-Hour Wash
- AutoSense cycle
- 48 dBA

Stainless – GDT635HSMSS  
Slate – GDT635HMMES

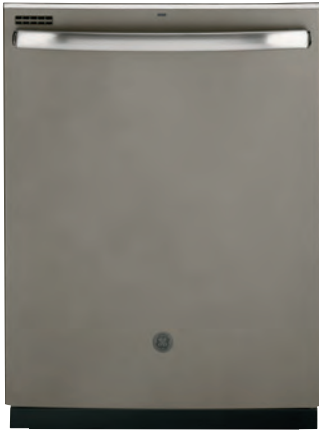


Model shown in Slate



**GDT530P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**

- Dry Boost
- **Steam + Sani**
- 1-Hour Wash
- **AutoSense cycle**
- Piranha hard-food disposer
- Nylon racks
- Adjustable upper rack
- 1- to 12-hour Delay Start
- WiFi optional\*
- 16 place settings
- 54 dBA

Stainless – GDT530PSPSS  
Slate – GDT530PMPES  
White – GDT530PGPWW  
Black – GDT530GPBB




**GDT535P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**

- Dry Boost
- Steam + Sani
- Active Flood Protect
- Piranha hard-food disposer
- 1-Hour Wash
- Automatic Hot Start
- Cabinet-depth flush install
- Built-up-floor capable
- WiFi optional\*
- 59 dBA

Stainless – GDT535PSMSS

BUILT-IN FRONT CONTROL DISHWASHERS

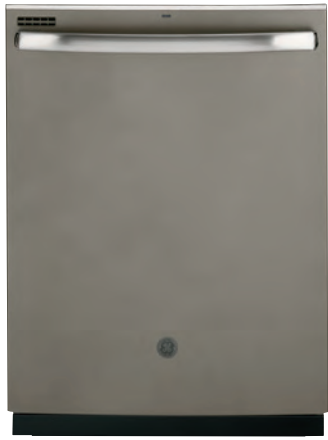


Model shown in Slate




**GDT630P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**

- **Third Rack**
- Dry Boost
- 4 Bottle Jets
- Wash Zones
- Three-level 600 Series Wash System
- Steam + Sani
- Piranha hard-food disposer
- Adjustable upper rack
- 1-Hour Wash
- WiFi optional\*
- 50 dBA

Stainless – GDT630PSMSS  
Slate – GDT630PMMES  
Black Slate – GDT630PFMDS  
White – GDT630PGMWW  
Black – GDT630PGMBB  
Fingerprint Resistant Stainless Steel GDT630PYMFS. (Available January 2021)

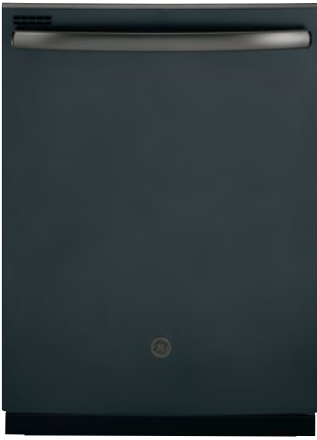


Model shown in Black Slate



**GDT605P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**

- Dry Boost
- **4 Bottle Jets**
- Steam + Sani
- Wash Zones
- Three-level 600 Series wash system
- Manual + adjustable upper rack
- Piranha hard-food disposer
- 1-Hour Wash
- AutoSense cycle
- WiFi optional\*
- 50 dBA

Stainless – GDT605PSMSS  
Slate – GDT605PMMES  
Black Slate – GDT605PFMDS  
White – GDT605PGMWW  
Black – GDT605PGMBB

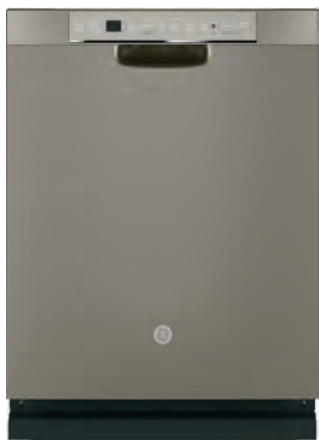

Model shown in Slate



**GDF645S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**

- Dry Boost with Fan Assist
- Bottle Jets
- Wash Zones
- Steam + Sani
- 1-Hour Wash
- Manual + adjustable upper rack
- Piranha hard-food disposer
- AutoSense cycle
- 16 place settings
- WiFi optional\*
- 48 dBA

Stainless – GDF645SSNSS  
Slate – GDF645SMNES  
White – GDF645SGNWW  
Black – GDF645SGNBB



**GDF565S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**

- Dry Boost
- Clean touch controls
- Piranha hard-food disposer
- Steam + Sani
- Nylon racks
- Heavy Wash
- Active Flood Protect
- 1-Hour Wash
- 14 place settings
- WiFi optional\*
- 50 dBA

Stainless – GDF565SSNSS

Complete features and specifications on pages 298–299. See page 227 for Accessibility Requirements.

**Bold = feature upgrade from previous model.** For definitions of logos, see page 9.


\*SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
\*\*Optional Third Rack sold separately.



BUILT-IN FRONT CONTROL DISHWASHERS



- GDF640H**  
**GE HYBRID STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Third Rack
  - Dry Boost™
  - 4 Bottle Jets
  - Wash Zones
  - Three-level 600 Series wash system
  - Steam + Sani
  - Piranha™ hard-food disposer
  - Adjustable upper rack
  - 1-Hour Wash
  - WiFi optional\*
  - 50 dBA
- |           |               |
|-----------|---------------|
| Stainless | - GDF640HSMSS |
| Slate     | - GDF640HMMES |
| White     | - GDF640HGMWW |
| Black     | - GDF640HGMBB |

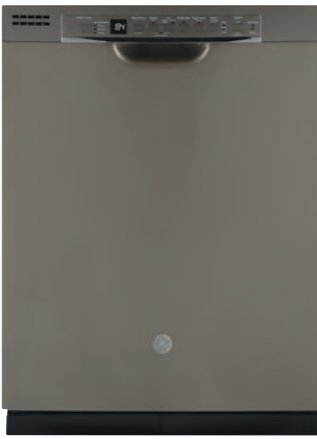

- GDF630P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Third Rack
  - Dry Boost
  - 4 Bottle Jets
  - Wash Zones
  - Steam + Sani
  - Piranha hard-food disposer
  - Manual + adjustable upper rack
  - 1-Hour Wash
  - WiFi optional\*
  - 50 dBA
- |           |               |
|-----------|---------------|
| Stainless | - GDF630PSMSS |
| Slate     | - GDF630PMMES |
| White     | - GDF630PGMWW |
| Black     | - GDF630PGMBB |

Model shown in Slate



- GDF510P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Dry Boost
  - Active Flood Protect
  - 1-Hour Wash
  - Piranha hard-food disposer
  - Cabinet-depth flush install
  - Built-up-floor capable
  - Heavy Wash
  - WiFi optional\*
  - 59 dBA
- |           |                                 |
|-----------|---------------------------------|
| Stainless | - GDF510PSMSS                   |
| White     | - GDF510PGMWW                   |
| Black     | - GDF510PGMBB                   |
| Stainless | - GDF511PSMSS (with power cord) |
| White     | - GDF511PGMWW (with power cord) |
| Black     | - GDF511PGMBB (with power cord) |



Discontinuing in January 2021




- GDF510P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Dry Boost
  - Active Flood Protect
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Heavy Wash
  - Cabinet-depth flush install
  - Built-up-floor capable
  - WiFi optional\*
  - 59 dBA
- |           |                                 |
|-----------|---------------------------------|
| Stainless | - GDF510PSRSS                   |
| White     | - GDF510PGRWW                   |
| Black     | - GDF510PGRBB                   |
| Stainless | - GDF511PSRSS (with power cord) |
| White     | - GDF511PGRWW (with power cord) |
| Black     | - GDF511PGRBB (with power cord) |

Model shown in White




Available in January 2021

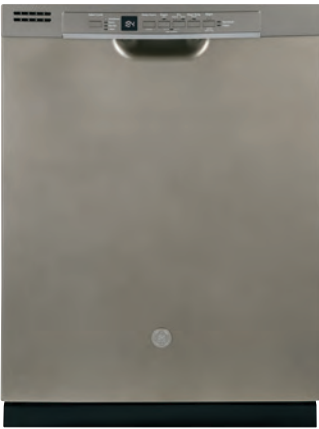

- GDF530P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Dry Boost
  - Steam + Sani
  - Piranha hard-food disposer
  - Nylon racks
  - 1-Hour Wash
  - AutoSense cycle
  - Manual + adjustable upper rack
  - WiFi optional\*
  - 54 dBA
- |           |               |
|-----------|---------------|
| Stainless | - GDF530PSMSS |
| Slate     | - GDF530PMMES |
| White     | - GDF530PGMWW |
| Bisque    | - GDF530PGMCC |
| Black     | - GDF530PGMBB |

Model shown in Slate



- GDF535P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Dry Boost
  - Steam + Sani
  - Active Flood Protect
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Heavy Wash
  - Cabinet-depth flush install
  - WiFi optional\*
  - 55 dBA
- |           |               |
|-----------|---------------|
| Stainless | - GDF535PSRSS |
| White     | - GDF535PGRWW |
| Bisque    | - GDF535PGRCC |
| Black     | - GDF535PGRBB |

Model shown in White



Available in January 2021



- GDF450P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Heavy Wash with Dry Boost
  - Normal Wash with Heated Dry
  - Active Flood Protect
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Cabinet-depth flush install
  - Built-up-floor capable
  - WiFi optional\*
  - 60 dBA
- |           |               |
|-----------|---------------|
| Stainless | - GDF450PSRSS |
| White     | - GDF450PGRWW |
| Black     | - GDF450PGRBB |

Model shown in White



Available in March 2021



- GSD3300K**  
**GE PLASTIC INTERIOR DISHWASHER**
- 3-level wash system
  - 2-stage filtration with extra-fine filter
  - Piranha hard-food disposer
  - Hot Start option
  - Insulation blanket
  - Heavy Wash
  - Hi-temp Wash
  - 62 dBA
- |           |                                |
|-----------|--------------------------------|
| Stainless | - GSD3360KSS                   |
| White     | - GSD3300KWW                   |
| Black     | - GSD3300KBB                   |
| Stainless | - GSD3361KSS (with power cord) |
| White     | - GSD3301KWW (with power cord) |
| Black     | - GSD3301KBB (with power cord) |

Model shown in White



Discontinuing in January 2021

Complete features and specifications on pages 300-302. See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.** For definitions of logos, see page 9.  
\*SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
\*\*Optional Third Rack sold separately. See page 161.



BUILT-IN FRONT CONTROL DISHWASHER



Model shown in Black



- GSD2100V**  
**GE PLASTIC INTERIOR DISHWASHER**
- 2-level wash system
  - 2-stage filtration with extra-fine filter
  - Piranha™ hard-food disposer
  - Hot Start option
  - Rinse only
  - Short wash
  - 5 cycles/2 options
  - Up to 12-place-setting capacity racking
  - 64 dBA

- White – GSD2100VWW
- Bisque – GSD2100VCC
- Black – GSD2100VBB

GE SPACEMAKER® DISHWASHERS



Model shown in White



- GSM2200V**  
**GE PLASTIC INTERIOR UNDER-THE-SINK DISHWASHER**
- Spacemaker upper rack
  - 2-stage filtration with extra-fine filter
  - Piranha hard-food disposer
  - Hot Start option
  - Deluxe silverware basket
  - 64 dBA

- Stainless – GSM2260VSS
- White – GSM2200VWW
- Black – GSM2200VBB



Under-sink installation

Complete features and specifications on pages 300, 302-305. See page 227 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



- GDT226S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- ADA compliant with low-profile installation
  - 3-level wash
  - AutoSense cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize option (NSF 184 Certified)
  - WiFi optional\*
  - 51 dBA


- Stainless – GDT226SSLSS
- White – GDT226SGLWW
- Black – GDT226SGLBB

NSF (National Sanitation Foundation)  
\*SmartHQ Connect™ Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00YO.



- GDT225S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- ADA compliant
  - 3-level wash
  - AutoSense cycle
  - Piranha hard-food disposer with removable filter
  - WiFi optional\*
  - 51 dBA

- Stainless – GDT225SSLSS
- White – GDT225SGLWW
- Black – GDT225SGLBB



- PDT145S**  
**GE PROFILE™ 18" BUILT-IN SMART DISHWASHER**
- ADA compliant
  - 3-level wash
  - AutoSense cycle
  - Piranha hard-food disposer with removable filter
  - WiFi optional\*
  - 47 dBA

- Stainless – PDT145SSLSS
- White – PDT145SGLWW
- Black – PDT145SGLBB

PORTABLE DISHWASHERS



- GPT225S**  
**GE STAINLESS INTERIOR PORTABLE SMART DISHWASHER**
- AutoSense cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize option (NSF 184 Certified)
  - 3-level wash
  - WiFi optional\*
  - 54 dBA

- Stainless – GPT225SSLSS
- White – GPT225SGLWW
- Black – GPT225SGLBB



- GPT145S**  
**GE STAINLESS INTERIOR PORTABLE SMART DISHWASHER**
- AutoSense cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize option (NSF 184 Certified)
  - 3-level wash
  - WiFi optional\*
  - 52 dBA

- Stainless – GPT145SSLSS



- UCG1520N**  
**BUILT-IN COMPACTOR**
- Hidden controls
  - Built-in only
  - 1.4 cu. ft. capacity
  - 1/3 HP motor
  - Removable key lock
  - Toe pedal opener
  - Reduces volume by 75%

- Stainless – UCG1520NSS
- White – UCG1500NWW
- Black – UCG1500NBB
- Panel-ready – UCG1510NII





# DISPOSERS

## FEATURE HIGHLIGHTS



**POWER GRINDING MOTOR**  
Quickly hits max speed and high torque so foods are less likely to jam or clog.



**STAINLESS STEEL GRINDING BLADES AND TURNTABLE**  
Made with heavy-duty steel to last for years.



**SEPTIC SAFE**  
Guaranteed to be safe for your septic system.

## DISPOSERS



**GFC1020N**  
**GE CONTINUOUS-FEED DISPOSER**  
• Power Grinding 1 HP motor  
• Over 2,800 RPM  
• EZ-Mount installation  
• 3-bolt-mount adapter kit Included  
• Drain-Boost technology  
• Optional accessory power cord sold separately (model WC12X10002)  
• Stainless steel grinding components



**GFC720N**  
**GE CONTINUOUS-FEED DISPOSER**  
• Power Grinding 3/4 HP motor  
• Over 2,700 RPM  
• EZ-Mount installation  
• 3-bolt-mount adapter kit Included  
• Drain-Boost technology  
• Optional accessory power cord sold separately (model WC12X10002)  
• Stainless steel grinding components



**GFC530N**  
**GE CONTINUOUS-FEED DISPOSER**  
• Power Grinding 1/2 HP motor  
• Over 2,600 RPM  
• EZ-Mount installation  
• 3-bolt-mount adapter kit Included  
• Drain-Boost technology  
• Optional accessory power cord sold separately (model WC12X10002)  
• **Stainless steel grinding components**



**GFC520N**  
**GE CONTINUOUS-FEED DISPOSER**  
• Power Grinding 1/2 HP motor  
• Over 2,600 RPM  
• EZ-Mount installation  
• 3-bolt-mount adapter kit Included  
• Drain-Boost technology  
• Optional accessory power cord sold separately (model WC12X10002)  
• Galvanized steel grinding blades

**GFC535N**  
Similar to GFC530N with attached power cord.

**GFC525N**  
Similar to GFC520N with attached power cord.



**GFC320N**  
**GE CONTINUOUS-FEED DISPOSER**  
• Power Grinding 1/3 HP motor  
• Over 2,300 RPM  
• EZ-Mount installation  
• 3-bolt-mount adapter kit Included  
• Drain-Boost technology  
• Optional accessory power cord sold separately (model WC12X10002)  
• Galvanized steel grinding blades

**GFC325N**  
Similar to GFC320N with attached power cord.



**GFB760N**  
**GE BATCH-FEED DISPOSER**  
• Power Grinding 3/4 HP motor  
• Over 2,700 RPM  
• EZ-Mount installation  
• 3-bolt-mount adapter kit Included  
• Drain-Boost technology  
• Optional accessory power cord sold separately (model WC12X10002)  
• Stainless steel grinding components



DISHWASHER PARTS & ACCESSORIES



	PM28X329	PM28X326—6' WX28X327—12'	WX09X70911—7.9' WX09X70910—5.4'	WD24X10065	WX28X329	WX28X321
	6' UNIVERSAL DISHWASHER INSTALLATION KIT	UNIVERSAL DISHWASHER CONNECTOR KIT WITH ADAPTER	UNIVERSAL 3-PRONG POWER CORD FOR BUILT-IN DISHWASHERS	12' DISHWASHER DRAIN HOSE	DISHWASHER GARDEN HOSE ELBOW	10' DISHWASHER DRAIN HOSE
	<ul style="list-style-type: none"><li>• Safely installs any dishwasher</li><li>• Includes universal 3-wire power cord and 6' connector</li><li>• UL® listed</li></ul>	<ul style="list-style-type: none"><li>• Braided polymer for superior bursting strength and chemical resistance</li><li>• Includes garden hose connector</li><li>• Fits most major brands of dishwashers</li></ul>	<ul style="list-style-type: none"><li>• Universal design fits most major brands</li><li>• Includes all needed hardware for installation</li><li>• UL listed</li></ul>	<ul style="list-style-type: none"><li>• Fast installation for dishwasher within 12 ft. of drain/water access</li></ul>	<ul style="list-style-type: none"><li>• 3/8" compression x 3/4" garden hose 90° elbow to connect water supply</li></ul>	<ul style="list-style-type: none"><li>• Please search by your appliance model number to ensure this part will fit your appliance</li><li>• Small-port 10-ft drain hose / 10-ft universal connector kit</li><li>• 10' drain hose: For standard tub dishwashers</li><li>• Easy installation for dishwasher within 10-ft of drain/water access</li></ul>
MODEL						
PDT785S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT775S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT715S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDP715S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GD969S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT665S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDP665S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT565S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT645S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF645S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDP645S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDP615H	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT635H	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT605	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT545P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT535P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDF820S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF650S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF630P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF656S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF610P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF530P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF520P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF510P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GSD3300/K	OPTIONAL	OPTIONAL	OPTIONAL	—	OPTIONAL	OPTIONAL
GSD2100V	OPTIONAL	OPTIONAL	OPTIONAL	—	OPTIONAL	OPTIONAL
GSM2200V	OPTIONAL	OPTIONAL	OPTIONAL	—	OPTIONAL	OPTIONAL
GDT225S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT145S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GPT225S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT145S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—



	GPF3RACK
	DISHWASHER THIRD-RACK ACCESSORY KIT
	<ul style="list-style-type: none"><li>• Learn how to easily install the third-rack accessory kit in your plastic tub dishwasher</li><li>• For select plastic tub dishwashers only</li><li>• Upgrade your standard two-rack dishwasher with a third rack</li><li>• Easily clean an entire flatware collection, knives and small utensils with an additional rack across the top of the dishwasher</li><li>• GE Appliances Exclusive</li></ul>
MODEL	
GDT635HSM	OPTIONAL
GDT635HMM	OPTIONAL
GDT605PSM	OPTIONAL
GDT605PBM	OPTIONAL
GDT605PMM	OPTIONAL
GDT605PFM	OPTIONAL
GDT605PGM	OPTIONAL
GDP615HSM	OPTIONAL
GDP615HBM	OPTIONAL
GDP615HFM	OPTIONAL
GDF530PSM	OPTIONAL
GDF530PMM	OPTIONAL
GDF530PGM	OPTIONAL
PDT775SYN	OPTIONAL
PDT775SBN	OPTIONAL

COMPACTOR / DISPOSER PARTS & ACCESSORIES



	WC12X10002	PM3X214	WC60X5017	WC17X10019, WC17X10011, WC17X10016 (All 3 pieces required)
	UNIVERSAL DISPOSER POWER CORD KIT	3-BOLT-MOUNT ADAPTER KIT	HEAVY-DUTY COMPACTOR BAGS	TOE KICK DOOR ASM SS
	<ul style="list-style-type: none"><li>• Fits most leading brands of disposers</li><li>• 3' length</li><li>• UL listed</li></ul>	<ul style="list-style-type: none"><li>• Adapter allows mounting an EZ-Mount disposer onto an existing 3-bolt-mount system</li><li>• Includes splash guard</li></ul>	<ul style="list-style-type: none"><li>• 12 heavy-duty rectangular compactor bags</li><li>• Made with 50% post-consumer recycled plastic</li></ul>	<ul style="list-style-type: none"><li>• Optional stainless toe kick conversion</li></ul>
MODEL				
GFC1020N	OPTIONAL	INCLUDED	—	—
GFC720N	OPTIONAL	INCLUDED	—	—
GFC530N	OPTIONAL	INCLUDED	—	—
GFC535N	INCLUDED	OPTIONAL	—	—
GFC520N	OPTIONAL	INCLUDED	—	—
GFC525N	INCLUDED	OPTIONAL	—	—
GFC320N	OPTIONAL	INCLUDED	—	—
GFC325N	INCLUDED	OPTIONAL	—	—
GFB760N	OPTIONAL	INCLUDED	—	—
UCG1600L	—	—	OPTIONAL	—
UCG1680L	—	—	OPTIONAL	OPTIONAL

UL is a registered trademark of Underwriters Laboratories, Inc.

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200  
OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).





CLOTHES CARE



# LAUNDRY MADE BETTER

Washers and dryers from GE Appliances are loaded with features that make laundry day easier. The UltraFresh Vent System with OdorBlock™, SmartDispense™ and Intelligent Sensor Dry simplify every step, while new finishes like Sapphire Blue and Satin Nickel add a perfect touch of color to the laundry room.



GEFW650SPNSN & GFD65ESPNSN—See pg. 168.



NEW Sapphire Blue finish—See pg. 168.



NEW Satin Nickel finish—See pg. 168.



GUD27GSPMDG/GUD27ESPMDG—See pg. 179.



GTW465ASNWW & GTD42EASJWW—See pg. 176.



GFT14ESSMWW & GFW148SSMWW—See pg. 171.



GEFW650SSNWW & GFD65ESSNWW—See pg. 168.





# FRONT LOAD CLOTHES CARE

## FEATURE HIGHLIGHTS



### ULTRAFRESH VENT SYSTEM WITH ODORBLOCK™

The first and only UltraFresh Vent System with OdorBlock™ eliminates excess moisture to help prevent odors, ensuring your washer stays fresh and clean.



### MICROBAN™ ANTIMICROBIAL TECHNOLOGY

Built into components including the gasket, dispenser and draining system, delivering protection that lives on load after load.



### SMARTDISPENSE™ TECHNOLOGY

Save time and make laundry effortless with an intelligent dispenser that holds up to 32 loads of detergent and automatically dispenses the right amount each time.



### 1 STEP WASH + DRY

Wash and dry a small load, eliminating the need to transfer clothes to the dryer.



### BUILT-IN WIFI POWERED BY SMARTHQ™\*

Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.



### DYNAMIC BALANCING TECHNOLOGY

Our patented, time-saving technology senses and re-balances uneven loads during the spin cycle, providing a quiet wash.



### REVERSIBLE DOOR

Easily reverse your washer and dryer doors for superior installation flexibility.



### WASHER LINK

Wirelessly links your washer to your dryer so you only choose a setting once.



### POWERSTEAM

Refresh small loads and dewrinkle larger loads with the power of steam.



FRONT LOAD CLOTHES CARE



GFW850S  
GE 5.0 CU. FT. CAPACITY  
SMART WASHER WITH STEAM

- UltraFresh Vent System with OdorBlock™
- SmartDispense™ Technology
- **1 Step Wash + Dry**
- Built-In WiFi powered by SmartHQ
- Dynamic Balancing Technology (dBT™)
- Reversible door
- Sanitize + Allergen
- Quick Wash

- Diamond Gray - GFW850SPNDG
- Sapphire Blue - GFW850SPNRS
- White - GFW850SSNWW

Matching Dryer: GFD85ES/GS  
Shown with optional pedestal GFPI528PNRS.  
GFPI528PNDG Diamond Gray and GFPI528SNWW  
White pedestals not shown.  
7" Riser also available: GFR0728PNDG,  
GFR0728PNRS, GFR0728SNWW



GFD85ES/GS  
GE 7.8 CU. FT. CAPACITY  
SMART DRYER WITH STEAM

- **Stainless steel drum**
- **Washer Link**
- Steam Refresh
- Built-In WiFi powered by SmartHQ
- Quick Dry
- Reduce Static
- Sanitize cycle
- Vent sensor

- Diamond Gray - GFD85ESPNDG (Electric)
- Diamond Gray - GFD85GSPNDG (Gas)
- Sapphire Blue - GFD85ESPNRS (Electric)
- Sapphire Blue - GFD85GSPNRS (Gas)
- White - GFD85ESSNWW (Electric)
- White - GFD85GSSNWW (Gas)

Matching Washer: GFW850S  
Shown with optional pedestal GFPI528PNRS.  
GFPI528PNDG Diamond Gray and GFPI528SNWW  
White pedestals not shown.  
7" Riser also available: GFR0728PNDG,  
GFR0728PNRS, GFR0728SNWW



GFW550S  
GE 4.8 CU. FT. CAPACITY  
SMART WASHER

- UltraFresh Vent System with OdorBlock
- Built-In WiFi powered by SmartHQ
- Time Saver
- Dynamic Balancing Technology (dBT)
- Reversible door
- True 32" closet depth
- Quick Wash
- Sanitize Cycle with Oxi

- White - GFW550SSNWW
- Diamond Gray - GFW550SPNDG

Matching Dryer: GFD55ES/GS, GFV55ES  
Shown with optional pedestal GFPI528SNWW.  
GFPI528PNDG Diamond Gray pedestal  
not shown.  
7" Riser also available: GFR0728SNWW,  
GFR0728PNDG



GFD55ES/GS  
GE 7.8 CU. FT. CAPACITY  
SMART DRYER

- Built-In WiFi powered by SmartHQ
- Quick Dry
- Sanitize cycle
- Wrinkle Care
- Sensor Dry
- Damp Alert
- Vent sensor
- Simplified 4-way venting

- White - GFD55ESSNWW (Electric)
- White - GFD55GSSNWW (Gas)
- Diamond Gray - GFD55ESPNDG (Electric)
- Diamond Gray - GFD55GSPNDG (Gas)

**GFV55—LONG-VENT MODEL**  
Similar to GFD55ESSN with up to  
200-ft. venting capability.

- White - GFV55ESSNWW (Electric)

Matching Washer: GFW510SCN, GFW550S  
Shown with optional pedestal GFPI528SNWW.  
GFPI528PNDG Diamond Gray pedestal  
not shown.  
7" Riser also available: GFR0728SNWW,  
GFR0728PNDG



GFW650S  
GE 4.8 CU. FT. CAPACITY  
SMART WASHER WITH STEAM

- UltraFresh Vent System with OdorBlock
- **SmartDispense Technology**
- Built-In WiFi powered by SmartHQ
- Dynamic Balancing Technology (dBT)
- Reversible door
- **Sanitize + Allergen**
- Quick Wash
- True 32" closet depth

- Satin Nickel - GFW650SPNSN
- White - GFW650SSNWW

Matching Dryer: GFD65ES/GS  
Shown with optional pedestal GFPI528PNSN.  
GFPI528SNWW White pedestal not shown.  
7" Riser also available: GFR0728PNSN,  
GFR0728SNWW



GFD65ES/GS  
GE 7.8 CU. FT. CAPACITY  
SMART DRYER WITH STEAM

- **Steam Refresh**
- Built-In WiFi powered by SmartHQ
- Quick Dry
- **Reduce Static**
- Sanitize cycle
- Wrinkle Care
- Damp Alert
- Vent sensor

- Satin Nickel - GFD65ESPNSN (Electric)
- Satin Nickel - GFD65GSPNSN (Gas)
- White - GFD65ESSNWW (Electric)
- White - GFD65GSSNWW (Gas)

Matching Washer: GFW650S.  
Shown with optional pedestal GFPI528PNSN.  
GFPI528SNWW White pedestal not shown.  
7" Riser also available: GFR0728PNSN,  
GFR0728SNWW



**CONTRACT ONLY**  
GFW510S  
GE 4.5 CU. FT. CAPACITY  
SMART WASHER

- UltraFresh Vent System with OdorBlock
- Built-In WiFi powered by SmartHQ
- Dynamic Balancing Technology (dBT)
- Reversible door
- True 32" closet depth
- Quick Wash
- 10-year warranty
- Sanitize Cycle with Oxi

- White - GFW510SCNWW

Matching Dryer: GFD55ES/GS, GFV55ES  
Shown with optional pedestal GFPI528SNWW.  
7" Riser also available: GFR0728SNWW



Complete features and specifications on pages 306-308.  
See page 227 for ADA requirements.

**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

Contract Only Models are included for the Builder Channel only.  
See your Area Sales Manager for details.




FRONT LOAD COMBINATION WASHER & DRYER



**GFQ14E**  
**GE 24" 2.4 CU. FT. CAPACITY FRONT LOAD WASHER & CONDENSER DRYER COMBO**

- 2.4 cu. ft. capacity
- No vent required, standard 120v plug
- All-In-One Wash & Dry
- Detergent, bleach and fabric softener dispensers
- Auto Wash + Dry
- Steam wash
- Sanitize cycles
- Add a Garment
- ADA compliant with the use of GAF140SSNWW riser
- WiFi optional\*

White - GFQ14ESSNWW



FRONT LOAD WASHER & CONDENSER DRYER



**GFW148S**  
**GE 2.4 CU. FT. CAPACITY 24" SMART FRONT LOAD WASHER**

- Plugs into dryer or wall
- Stainless steel basket
- Steam
- Electronic touch controls
- 14 wash cycles
- 1,400-RPM spin speed
- WiFi optional\*
- ADA compliant with the use of GAF140SSNWW riser

White - GFW148SSMWW

Matching Dryers: GFT14ESSM, GFD14ESSN




**GFT14ES**  
**GE 4.1 CU. FT. CAPACITY 24" SMART VENTLESS CONDENSER DRYER**

- Reversible door
- Stainless steel drum
- Outlet for washer
- Sanitize cycle
- Extended Tumble
- Can drain to water tank or standpipe
- WiFi optional\*
- ADA compliant with the use of GAF140SSNWW riser

White - GFT14ESSMWW (Electric)

Matching Washer: GFW148SSM

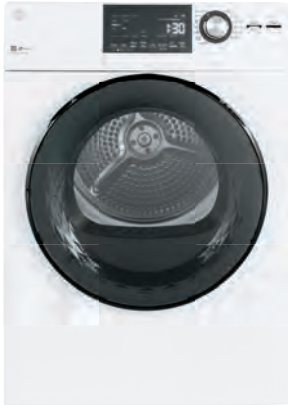

**GFD14ES**  
**GE 4.3 CU. FT. CAPACITY 24" SMART VENTED ELECTRIC DRYER**

- Reversible door
- Stainless steel drum
- Outlet for washer
- Sanitize cycle
- Extended tumble
- WiFi optional\*
- ADA compliant with the use of GAF140SSNWW riser

White - GFD14ESSNWW (Electric)

Matching Washer: GFW148SSM



**GAF140SSNWW**  
**4" RISER AND DRIP PAN FOR 24" FRONT LOAD WASHER AND DRYERS**

- 4" riser that meets ADA standard
- Easy installation
- Integrated drip pan
- Compatible with GFW148/GFT14/GFD14/GFQ14

Complete features and specifications on pages 309–311.  
See page 227 for ADA requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

\*SmartHQ™ Connect Module is required and sold separately.  
It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.





# TOP LOAD CLOTHES CARE

## FEATURE HIGHLIGHTS

### WASHERS




#### SMARTDISPENSE™ TECHNOLOGY

An intelligent dispenser that holds up to 48 loads of detergent and automatically dispenses the right amount, saving you time and making laundry effortless.



#### FLEXDISPENSE™

Automatically releases liquid or powder detergent, fabric softener, and even detergent packs like Tide PODS™, at the right time for faster activation and optimal cleaning performance.



#### POWER PREWASH

Get even the most heavily soiled items perfectly clean in a single cycle that adds detergent, agitates, and soaks, then drains the dirty water and repeats the wash process.



#### WATER STATION

Pre-treat your clothes inside the washer with an integrated water station that dispenses water and detergent together, or just water, all at your desired temperature.



#### BUILT-IN WIFI

Start the washer before your commute home, thanks to the GE Appliances app that lets you monitor and control your laundry pair from anywhere, as well as receive real-time notifications and updates.



#### DEEP FILL

Customize your water levels with just the touch of a button, and fill the tub with as much water as you want so you can wash your way.

### DRYERS



#### STEAM

Dewrinkle and refresh your laundry right in the dryer with innovative built-in steam technology.



#### SENSOR DRY

Prevent over-drying and get more wear out of your clothing, thanks to innovative dual thermistor technology that continually monitors temperature and moisture in the dryer.



#### 120-FT. VENTING CAPABILITY

Maximize your dryer's performance with innovative venting, designed to provide optimal airflow, enhanced drying ability and flexible installation.



TOP LOAD WASHERS & DRYERS



**GTW840C**  
**GE 5.2 CU. FT. CAPACITY SMART STAINLESS STEEL WASHER**

- **SmartDispense™** Technology
- **Power Prewash**
- **Water Station**
- **Built-In WiFi powered by SmartHQ™**
- Efficient infusor
- QuietWash
- Deep Fill
- Multiple rinse options
- Limited 10-year motor warranty

■ Diamond Gray - GTW840CPNDG  
□ White with Silver backsplash - GTW840CSNWS

Matching Dryer: GTD84EC/GC



**GTW845C**  
**GE 5.0 CU. FT. CAPACITY SMART STAINLESS STEEL WASHER**

- **SmartDispense** Technology
- **Power Prewash**
- **Water Station**
- **Built-In WiFi powered by SmartHQ™**
- Dual-action agitator
- QuietWash
- Deep Fill
- Multiple rinse options
- Limited 10-year motor warranty

■ Diamond Gray - GTW845CPNDG  
□ White with Silver backsplash - GTW845CSNWS

Matching Dryer: GTD84EC/GC



**GTD84EC/GC**  
**GE 7.4 CU. FT. CAPACITY SMART DRYER WITH STEAM**

- **Steam**
- Blocked Vent Sensor
- **Built-In WiFi powered by SmartHQ™**
- Sensor Dry
- Up to 120-ft. venting
- Wrinkle Care
- Digital touch control
- My Cycle settings
- Quick Dry

■ Diamond Gray - GTD84ECPNDG (Electric)  
■ Diamond Gray - GTD84GCPNDG (Gas)  
□ White with Silver backsplash - GTD84ECSNWS (Electric)  
□ White with Silver backsplash - GTD84GCSNWS (Gas)

Matching Washers: GTW840CSN, GTW840CPN, GTW845CSN and GTW845CPN



**GTD72EB/GB**  
**GE 7.4 CU. FT. CAPACITY SMART DRYER**

- Sensor Dry
- Up to 120-ft. venting
- Wrinkle Care
- My Cycle Settings
- Quick Dry
- Damp Alert
- Dry level options
- Sanitize cycle
- WiFi optional\*

■ Diamond Gray - GTD72EBPNDG (Electric)  
■ Diamond Gray - GTD72GBPNDG (Gas)  
□ White with Silver backsplash - GTD72EBSNWS (Electric)  
□ White with Silver backsplash - GTD72GBSNWS (Gas)

Matching Washers: GTW720BSN, GTW720BPN, GTW725BSN and GTW725BPN



**GTW720B**  
**GE 4.8 CU. FT. CAPACITY SMART STAINLESS STEEL WASHER**

- **FlexDispense™**
- **QuietWash**
- Stain Removal Guide
- Sanitize with Oxi
- Efficient infusor
- Deep Fill
- Multiple rinse options
- Limited 10-year motor warranty
- WiFi optional\*

■ Diamond Gray - GTW720BPNDG  
□ White with Silver backsplash - GTW720BSNWS

Matching Dryer: GTD72EB/GB



**GTW725B**  
**GE 4.6 CU. FT. CAPACITY SMART STAINLESS STEEL WASHER**

- **FlexDispense**
- **QuietWash**
- Stain Removal Guide
- Sanitize with Oxi
- Dual-action agitator
- Deep Fill
- Multiple rinse options
- Limited 10-year motor warranty
- WiFi optional\*

■ Diamond Gray - GTW725BPNDG  
□ White with Silver backsplash - GTW725BSNWS

Matching Dryer: GTD72EB/GB



**GTW500A**  
**GE 4.6 CU. FT. CAPACITY STAINLESS STEEL WASHER**

- Stain Pretreat
- DeepClean Cycle
- Deep Fill
- Speed Wash
- Deep Rinse
- 2nd Rinse
- Efficient infusor
- 5 soil levels

□ White with Silver backsplash - GTW500ASNWS

Matching Dryer: GTD45EA/GASJ



**GTD45EA/GA**  
**GE 7.2 CU. FT. CAPACITY DRYER**

- **Sensor Dry**
- Up to 120-ft. venting capability
- Aluminized alloy drum
- Extended Tumble
- End-of-cycle signal

□ White with Silver backsplash - GTD45EASJWS (Electric)  
□ White with Silver backsplash - GTD45GASJWS (Gas)

Matching Washers: GTW500ASN, GTW490ACJWS

\*SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0. Complete features and specifications on pages 312-315.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.



TOP LOAD WASHERS & DRYERS



**GTW465A**  
**GE 4.5 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- Deep Fill
- Water level/Load size
- DeepClean cycle
- Speed Wash
- Deep Rinse
- 2nd Rinse
- Auto Soak
- Dual-action agitator

□ White - GTW465ASNWW

Matching Dryers: GTD42EA/GASJ and GTX42EA/GASJ



**GTD42EA/GA**  
**GE 7.2 CU. FT. CAPACITY**  
**DRYER**

- Auto Dry
- Up to 120-ft. venting capability
- Aluminized alloy drum
- **Extended Tumble**
- End-of-cycle signal
- **4 heat selections**

□ White - GTD42EASJWW (Electric)  
□ White - GTD42GASJWW (Gas)

**GTX42EA/GASJWW**

Similar to GTD42EA/GASJ except 6.2 cu. ft. capacity

Matching Washers: GTW465ASN and GTW490ACJWW



**GTW335A**  
**GE 4.2 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- Water level/Load size
- DeepClean cycle
- Large capacity
- Deep Rinse
- Heavy-duty agitator
- Stainless steel basket
- 11 wash cycles
- 6 water temperatures

□ White - GTW335ASNWW

Matching Dryers: GTD33EA/GASK, GTX33EA/GASK



**GTD33EA/GA**  
**GE 7.2 CU. FT. CAPACITY DRYER**

- Auto Dry
- Up to 120-ft. venting capability
- Aluminized alloy drum
- 3 heat selections
- Rotary electromechanical controls
- Upfront lint filter
- Reverse-a-Door

□ White - GTD33EASKWW (Electric)  
□ White - GTD33GASKWW (Gas)

**GTX33EA/GASKWW**

Similar to GTD33EA/GASK except 6.2 cu. ft. capacity

Matching Washer: GTW335ASN



**CONTRACT ONLY**

**GTW490A**  
**GE 4.4 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- **ENERGY STAR**® certified
- **Efficient Infusor**
- **Deep Fill**
- **Stain Pretreat**
- Deep Rinse
- **Auto Soak**
- Speed Wash

□ White - GTW490ACJWW  
□ White/Silver backslash - GTW490ACJWS

Matching Dryers: GTD42EA/GASJ and GTX42EA/GASJ for GTW490ACJWW and GTD45EA/GASJ for GTW490ACJWS



**CONTRACT ONLY**

**GTW220A**  
**GE 3.8 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- Stainless steel basket
- Heavy-duty agitator
- **Precise Fill with 4 wash levels**
- Rotary electronic controls with cycle status lights
- 10 wash cycles
- Deep Rinse

□ White - GTW220ACKWW

Matching Dryer: GTX22EA/GASK



**CONTRACT ONLY**

**GTX22EA/GA**  
**GE 6.2 CU. FT. CAPACITY DRYER**

- Auto Dry
- Up to 120-ft. venting capability
- Aluminized alloy drum
- 3 heat selections
- Rotary electromechanical controls
- Upfront lint filter
- Reverse-a-Door

□ White - GTX22EASKWW (Electric)  
□ White - GTX22GASKWW (Gas)

Matching Washer: GTW220ACK

Complete features and specifications on pages 312-315.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

Contract Only Models are included for the Builder Channel only.  
See your Area Sales Manager for details.



STACKABLE/PORTABLE WASHERS/DRYERS



**GNW128P**  
**GE SPACE- SAVING 2.8 CU. FT. CAPACITY PORTABLE WASHER**

- Large capacity
- Small footprint
- Caster wheels included
- Included unicoupler
- Electronic one-touch controls with LED readout
- 8 washer cycles
- 4 wash temperatures
- Stainless steel basket

White – GNW128PSMWW



**GNW128S**  
**GE SPACE- SAVING 2.8 CU. FT. CAPACITY STATIONARY WASHER**

- Large capacity
- Small footprint
- Electronic one-touch controls with LED readout
- 8 washer cycles
- 4 wash temperatures
- Stainless steel basket

White – GNW128SSMWW



**DSKP333EC**  
**GE 120V PORTABLE DRYER 3.6 CU. FT. CAPACITY**

- 3 dry cycles
- 3 heat selections
- Dura Drum interior
- Quiet-by-Design

White – DSKP333ECWW



**DSKS433EB**  
**GE 240V STATIONARY DRYER 3.6 CU. FT. CAPACITY**

- Auto Dry
- **4 heat selections**
- 3 dry cycles
- Rotary controls
- Upfront lint filter

White – DSKS433EBWW



**DSKS333EC**  
**GE SPACEMAKER® 120V 3.6 CU. FT. STATIONARY ELECTRIC DRYER**

- 3 dry cycles
- 3 heat selections
- Dura Drum interior
- Quiet-by-Design

White – DSKS333ECWW

Complete features and specifications on pages 316-317.  
See page 227 for ADA requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 9.

UNITIZED WASHERS/DRYERS



**GUD27ES/GS**  
**GE 27" UNITIZED WASHER/DRYER WITH 3.8 CU. FT. CAPACITY WASHER AND 5.9 CU. FT. CAPACITY DRYER**

- Stainless steel basket
- Rotary electromechanical controls (dryer)
- 11 wash cycles
- 6 wash temperatures
- 1 wash/spin speed combination
- Auto Load Sensing with 4 water levels
- Rotary electronic controls (washer)
- Bleach dispenser
- WiFi optional (washer)\*

White – GUD27ESSMWW (Electric)  
White – GUD27GSSMWW (Gas)  
Diamond Gray – GUD27ESPMDG (Electric)  
Diamond Gray – GUD27GSPMDG (Gas)

**GUV27ES—LONG-VENT MODEL**  
**UP TO 200-FT. VENTING CAPABILITY**

White – GUV27ESSMWW (Electric)



**GUD27EE/GE**  
**GE 27" ENERGY STAR® UNITIZED WASHER/DRYER WITH 3.9 CU. FT. CAPACITY WASHER AND 5.9 CU. FT. CAPACITY DRYER**

- Precise Fill technology
- Deep Rinse
- 11 wash cycles
- 6 wash temperatures
- Efficient infusor
- Cycle status lights
- End-of-cycle chime
- WiFi optional\*

White – GUD27EESNWW (Electric)  
White – GUD27GESNWW (Gas)



**GUD24ES/GS**  
**GE 24" UNITIZED WASHER/DRYER WITH 2.3 CU. FT. CAPACITY WASHER AND 4.4 CU. FT. CAPACITY DRYER**

- Stainless steel basket
- Rotary electromechanical controls (dryer)
- 11 wash cycles
- 6 wash temperatures
- 1 wash/spin speed combination
- Auto Load Sensing
- Rotary electronic controls (washer)
- Bleach dispenser
- WiFi optional (washer)\*

White – GUD24ESSMWW (Electric)  
White – GUD24GSSMWW (Gas)



\*SmartHQ™ Connect Module is required and sold separately.  
It is available for order on geappliances.com, part number PBX23W00Y0.



CLOTHES CARE PARTS & ACCESSORIES


				
	WX14X10011	WX14X10005	WH41X10207	WH49X301
	UNIVERSAL 6' STAINLESS STEEL WASHER HOSE WITH 90° ELBOW, 2-PACK	UNIVERSAL 4' POLYMER-COATED WASHER HOSE, 2-PACK	UNIVERSAL 4' RUBBER WASHER HOSE, 2-PACK	WASHING MACHINE DRAIN HOSE EXTENSION KIT
	<ul style="list-style-type: none"><li>• Heavy-duty stainless steel with protective, non-corrosive coating</li><li>• Burst-resistant, triple-ply design for extra durability</li><li>• 90° elbow for installation in tight spaces</li></ul>	<ul style="list-style-type: none"><li>• Certified 1,600 PSI burst strength for greater durability</li><li>• Dual crimping inside and outside reduces chance of leaking</li><li>• Durable braided stainless steel exterior resists puncturing and tearing</li><li>• GE Appliances recommends new hoses for approved installation</li></ul>	<ul style="list-style-type: none"><li>• Not repackaged or reconditioned</li><li>• 800 PSI strength for greater durability</li><li>• Woven polyester reinforcement adds strength, reduces stretching and deterioration</li><li>• GE Appliances recommends new hoses for approved installation</li><li>• GE Appliances recommends replacing hoses every 5 years</li></ul>	
MODEL				
GFW850S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFD85	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFW650S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFD65	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFW550S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFD55/GFV55	-	-	-	-
GFW510S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFW148S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFT14	-	-	-	OPTIONAL ACCESSORY
GFD14	-	-	-	OPTIONAL ACCESSORY
GFQ14	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTW840	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTW845	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD84	-	-	-	-
GTW720	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTW725	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD72	-	-	-	-
GTW500A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD45	-	-	-	-
GTW465	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD42	-	-	-	-
GTW490A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	INCLUDED	OPTIONAL ACCESSORY
GTW335A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD33/GTX33	-	-	-	-
GTW220A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	INCLUDED	OPTIONAL ACCESSORY
GTX22	-	-	-	-
GNW128P	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GNW128S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
DSKP333	-	-	-	-
DSKS433	-	-	-	-
DSKS333	-	-	-	-
GUD27	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GUD24	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFQ14E				

	WH49X316	WH49X317	WX17X10001CA
	WASHING MACHINE DRAIN HOSE EXTENSION KIT	WASHING MACHINE DRAIN HOSE EXTENSION KIT	UNIVERSAL ANTI-VIBRATION PADS
			<ul style="list-style-type: none"><li>• Helps reduce noise and vibration from washer and/or dryer</li><li>• Protects floors</li></ul>
MODEL			
GFW850S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFD85	-	-	-
GFW650S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFD65	-	-	-
GFW550S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFD55/GFV55	-	-	-
GFW510S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFW148S	-	OPTIONAL ACCESSORY	-
GFT14	-	-	-
GFD14	-	-	-
GFQ14	-	-	-
GTW840C	-	-	OPTIONAL ACCESSORY
GTW845S	-	-	OPTIONAL ACCESSORY
GTD84	-	-	-
GTW720B	-	-	OPTIONAL ACCESSORY
GTW725B	-	-	OPTIONAL ACCESSORY
GTD72	-	-	-
GTW500A	-	-	OPTIONAL ACCESSORY
GTD45	-	-	-
GTW465	-	-	OPTIONAL ACCESSORY
GTD42	-	-	-
GTW490A	-	-	OPTIONAL ACCESSORY
GTW335A	-	-	OPTIONAL ACCESSORY
GTD33 /GTX33	-	-	-
GTW220A	-	-	OPTIONAL ACCESSORY
GTX22	-	-	-
GNW128P	-	OPTIONAL ACCESSORY	-
GNW128S	-	OPTIONAL ACCESSORY	-
DSKP333	-	-	-
DSKS433	-	-	-
DSKS333	-	-	-
GUD27	-	-	-
GUD24	-	-	-
QFW150	-	OPTIONAL ACCESSORY	-
GFQ148	-	OPTIONAL ACCESSORY	-
GFQ14E			

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).



CLOTHES CARE PARTS & ACCESSORIES



MODEL	PM7X2 (WHITE)	WX09X10020	PM08X10085
	UNIVERSAL LOW-PROFILE WASHER FLOOR TRAY	UNIVERSAL 4-WIRE, 6', 30-AMP ELECTRICAL DRYER CORD	GE APPLIANCES EXCLUSIVE UNIVERSAL FLEXIBLE METAL TRANSITION DRYER DUCT
	<ul style="list-style-type: none"><li>Protects floor from scuffs, spills, and overflows</li><li>Low-profile washer tray allows pedestal drawer to fully extend without having to lift the washing machine</li><li>Ideal for 2nd floor laundry rooms</li><li>PVC connector included and easily attaches to floor drain for added protection</li><li>Interior dimensions: 29"W x 33"L Exterior dimensions: 31" x 35"</li><li>Maximum capacity: 6.78 gallons/27.5 liters</li></ul>	<ul style="list-style-type: none"><li>99.9% pure copper for optimal performance</li><li>Reinforced stamped brass plug blades reduce breakage and bending</li><li>Ring terminals provide dependable, secure installation</li><li>Space-saving, right-angle plug design gets dryer closer to the wall</li></ul> <p><b>WX09X10018</b>—4-wire, 4', 30-amp <b>WX09X10019</b>—4-wire, 5', 30-amp <b>WX09X10002</b>—3-wire, 4', 30-amp <b>WX09X10003</b>—3-wire, 5', 30-amp <b>WX09X10004</b>—3-wire, 6', 30-amp</p>	<ul style="list-style-type: none"><li>Allows 90° turns without elbows or cutting</li><li>Crush-resistant for enhanced airflow</li><li>8' length fits most installations</li><li>UL* listed*</li></ul>
GFW850S	OPTIONAL ACCESSORY	–	–
GFD85	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFW650S	OPTIONAL ACCESSORY	–	–
GFD65	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFW450S	OPTIONAL ACCESSORY	–	–
GFW550S	OPTIONAL ACCESSORY	–	–
GFD55/GFV55	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFW510S	OPTIONAL ACCESSORY	–	–
GFW148S	–	–	–
GFT14	–	OPTIONAL ACCESSORY	–
GFD14	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFQ14	–	–	–
GTW840C	OPTIONAL ACCESSORY	–	–
GTW845S	OPTIONAL ACCESSORY	–	–
GTD84	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW720B	OPTIONAL ACCESSORY	–	–
GTW725B	OPTIONAL ACCESSORY	–	–
GTD72	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW500A	OPTIONAL ACCESSORY	–	–
GTD45	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW465	OPTIONAL ACCESSORY	–	–
GTD42	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW490A	OPTIONAL ACCESSORY	–	–
GTW335A	OPTIONAL ACCESSORY	–	–
GTD33 /GTX33	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW220A	OPTIONAL ACCESSORY	–	–
GTX22	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GNW128P	–	–	–
GNW128S	–	–	–
DSKP333	–	–	OPTIONAL ACCESSORY
DSKS433	–	–	OPTIONAL ACCESSORY
DSKS333	–	–	OPTIONAL ACCESSORY
GUD27	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GUD24	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFQ14E			


MODEL	PM8X73	PM15X114 - 4' PM15X118 - 5'	WE25X0217	WE25M87
	UNIVERSAL FLEXIBLE DRYER DUCT	GAS DRYER CONNECTION KIT WITH AUTO SHUTOFF	GE GAS DRYER LP CONVERSION KIT ACCESSORY	DRYER NATURAL GAS TO PROPANE
	<ul style="list-style-type: none"><li>Flexible design allows for ease of installation</li><li>Made from heavy-duty, 4-ply aluminum foil laminate</li><li>8' x 4" diameter (fully extended)</li><li>UL listed*</li></ul>	<ul style="list-style-type: none"><li>Includes step-by-step instructions and everything needed for safe and easy installation of a gas dryer</li><li>Helps prevent a hazardous buildup of gas</li><li>For indoor or outdoor use</li></ul>	<ul style="list-style-type: none"><li>TL 27" Dryer</li><li>HALC 27" Dryer</li></ul>	
GFW850S	–	–	–	–
GFD85	OPTIONAL ACCESSORY	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)	–	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)
GFW650S	–	–	–	–
GFD65	OPTIONAL ACCESSORY	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)	–	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)
GFW550S	–	–	–	–
GFD55/GFV55	OPTIONAL ACCESSORY	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)	–	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)
GFW510S	–	–	–	–
GFW148S	–	–	–	–
GFT14	–	–	–	–
GFD14	OPTIONAL ACCESSORY	–	–	–
GFQ14	–	–	–	–
GTW840C	–	–	–	–
GTW845S	–	–	–	–
GTD84	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW720B	–	–	–	–
GTW725B	–	–	–	–
GTD72	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW500A	–	–	–	–
GTD45	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW465	–	–	–	–
GTD42	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW490A	–	–	–	–
GTW335A	–	–	–	–
GTD33 /GTX33	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW220A	–	–	–	–
GTX22	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GNW128P	–	–	–	–
GNW128S	–	–	–	–
DSKP333	OPTIONAL ACCESSORY	–	–	–
DSKS433	OPTIONAL ACCESSORY	–	–	–
DSKS333	OPTIONAL ACCESSORY	–	–	–
GUD27	OPTIONAL ACCESSORY	–	–	–
GUD24	OPTIONAL ACCESSORY	–	–	–
GFQ14E				

\*UL is a registered trademark of Underwriters Laboratories, Inc.


ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).



CLOTHES CARE PARTS & ACCESSORIES

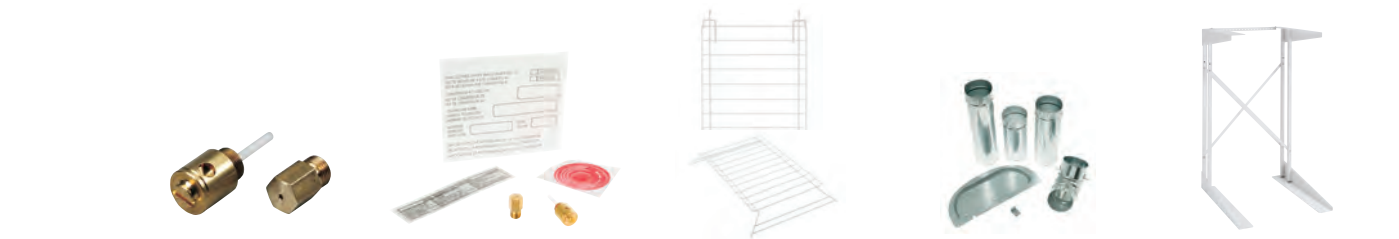

	WE25M73 DRYER LP CONVERSION KIT - 24"	WE25M74 DRYER LP CONVERSION KIT - 27"	WE01X22274 OPTIONAL DRYER RACK	WE16X29317 DRYER SIDE VENT	DSDR24F GE STACK RACK
MODEL					<ul style="list-style-type: none"><li>For use with up to 24"-wide portable or stationary washers and DSKS model dryers</li></ul>
GFW850S	-	-			-
GFD85	-	-	WE02X29449	OPTIONAL ACCESSORY	-
GFW650S	-	-	-	-	-
GFD65	-	-	WE02X29449	OPTIONAL ACCESSORY	-
GFW550S	-	-	-	-	-
GFD55/GFV55	-	-	WE02X29449	OPTIONAL ACCESSORY	-
GFW510S	-	-	-	-	-
GFW148S	-	-	-	-	-
GFT14	-	-	-	-	-
GFD14	-	-	-	-	-
GFQ14	-	-	-	-	-
GTW840C	-	-	-	-	-
GTW845S	-	-	-	-	-
GTD84	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW720B	-	-	-	-	-
GTW725B	-	-	-	-	-
GTD72	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW500A	-	-	-	-	-
GTD45	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW465	-	-	-	-	-
GTD42	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW490A	-	-	-	-	-
GTW335A	-	-	-	-	-
GTD33 / GTX33	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW220A	-	-	-	-	-
GTX22	-	OPTIONAL FOR INSTALLATION	-	-	-
GNW128P	-	-	-	-	OPTIONAL FOR INSTALLATION
GNW128S	-	-	-	-	OPTIONAL FOR INSTALLATION
DSKP333	-	-	-	-	-
DSKS433	-	-	-	-	OPTIONAL FOR INSTALLATION
DSKS333	-	-	-	-	OPTIONAL FOR INSTALLATION
GUD27	-	OPTIONAL FOR INSTALLATION	-	-	-
GUD24	OPTIONAL FOR INSTALLATION	-	-	-	-
GFQ14E					

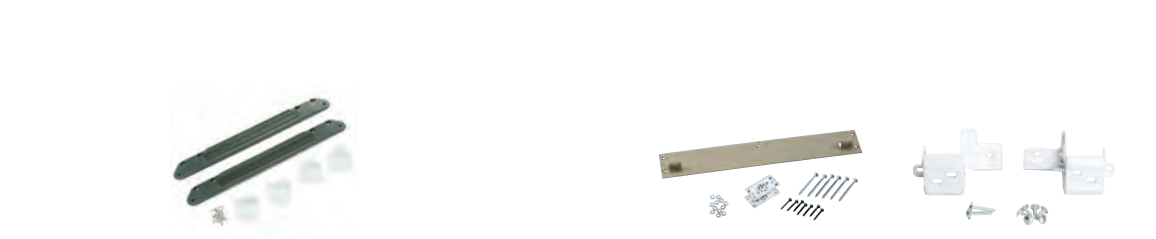

	GFA28KITN GE WASHER/DRYER STACK BRACKET KIT	GFR0728 7" RIGHTHEIGHT RISER	WMK35 WALL-MOUNT KIT	GFA24KITL GE WASHER/DRYER 24" STACK BRACKET KIT
MODEL		<ul style="list-style-type: none"><li>GFR0728SNWW</li><li>GFR0728PNDG</li><li>GFR0728PNSN</li><li>GFR0728PNRS</li></ul>	<ul style="list-style-type: none"><li>Only applies to stationary models</li></ul>	<ul style="list-style-type: none"><li>For use with 24" front load washers and dryers</li></ul>
GFW850S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFD85	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW650S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFD65	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW550S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFD55/GFV55	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW510S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW148S	-	-	-	OPTIONAL ACCESSORY
GFT14	-	-	-	OPTIONAL ACCESSORY
GFD14	-	-	-	OPTIONAL ACCESSORY
GFQ14	-	-	-	OPTIONAL ACCESSORY
GTW840C	-	-	-	-
GTW845S	-	-	-	-
GTD84	-	-	-	-
GTW720B	-	-	-	-
GTW725B	-	-	-	-
GTD72	-	-	-	-
GTW500A	-	-	-	-
GTD45	-	-	-	-
GTW465	-	-	-	-
GTD42	-	-	-	-
GTW490A	-	-	-	-
GTW335A	-	-	-	-
GTD33/GTX33	-	-	-	-
GTW220A	-	-	-	-
GTX22	-	-	-	-
GNW128P	-	-	-	-
GNW128S	-	-	-	-
DSKP333	-	-	-	-
DSKS433	-	-	-	-
DSKS333	-	-	-	-
GUD27	-	-	-	-
GUD24	-	-	-	-
GFQ14E				

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200  
OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).





# WATER SYSTEMS






# ELECTRIC WATER HEATERS

## FEATURE HIGHLIGHTS



### REAL CAPACITY

Get the most hot showers from the only water heaters that hold a true 50, 40 or 30 gallons of water.\*



### BUILT-IN WIFI

Easily adjust temperatures, set vacation mode schedules and receive notifications with Built-in WiFi powered by SmartHQ™.



### HIGH FIRST HOUR RATING (FHR)\*\*

Live comfortably with these best-in-class units that deliver high volume of hot water in the first hour.



### QUICK RECOVERY

Two 5500W heating elements quickly increase water temperature for hot water when you need it.



### ANODE SENSING

Durable design offers long-lasting protection against corrosion.



### DIGITAL DISPLAY

Make easy, accurate adjustments at the touch of a button.



### STAINLESS STEEL HEATING ELEMENTS

Ultra-durable stainless steel heating elements resist rust and corrosion.



### BRASS DRAIN VALVE

Rust-proof construction can be counted on to provide long-lasting service.



### EASY SETUP

Replace the old water heater quickly and easily using standard water and electrical connections.

\*Compared to 50, 40 and 30 gallon electric steel tank water heaters per DOE rated gallon capacity.  
\*\*First Hour Rating (FHR) test simulates hot water usage and indicates how many gallons of water are delivered in one hour before water temperature drops from 125°F to 110°F.



ELECTRIC WATER HEATERS



**GE50T12BLM**  
**GE 50-GALLON RATED CAPACITY TALL**

- Family size 3 to 5\*
- Electronic controls
- Built-in WiFi powered by SmartHQ™
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 78-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE50T10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE50T10BAM** (not shown)  
• Standard anode rod

- Thermostat
- Two 5,500-watt stainless steel heating elements
- Brass drain valves

**GE50T08BAM** (not shown)  
• Thermostat

• Two 5,500-watt copper heating elements



**GE50S12BLM**  
**GE 50-GALLON RATED CAPACITY SHORT**

- Family size 3 to 5\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 75-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE50S10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE50S10BAM** (not shown)  
• Standard anode rod

- Thermostat
- Two 5,500-watt stainless steel heating elements
- Brass drain valves

**GE50S08BAM** (not shown)  
• Thermostat

• Two 5,500-watt copper heating elements



**GE40T12BLM**  
**GE 40-GALLON RATED CAPACITY TALL**

- Family size 2 to 4\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 66-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE40T10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE40T10BAM** (not shown)  
• Standard anode rod

- Thermostat
- Two 5,500-watt stainless steel heating elements
- Brass drain valves

**GE40T08BAM** (not shown)  
• Thermostat

• Two 5,500-watt copper heating elements



**GE40S12BLM**  
**GE 40-GALLON RATED CAPACITY SHORT**

- Family size 2 to 4\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 65-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE40S10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE40S10BAM** (not shown)  
• Standard anode rod

- Thermostat
- Two 5,500-watt stainless steel heating elements
- Brass drain valves

**GE40S08BAM** (not shown)  
• Thermostat

• Two 5,500-watt copper heating elements



**GE30T12BLM**  
**GE 30-GALLON RATED CAPACITY TALL**

- Family size 1 to 3\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 59-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE30T10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE30T10BAM** (not shown)  
• Standard anode rod

- Thermostat
- Brass drain valves
- Two 5,500-watt stainless steel heating elements

**GE30T08BAM** (not shown)  
• Thermostat

• Two 5,500-watt copper heating elements



**GE30S12BLM**  
**GE 30-GALLON RATED CAPACITY SHORT**

- Family size 1 to 3\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 60-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE30S10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE30S10BAM** (not shown)  
• Standard anode rod

- Thermostat
- Two 5,500-watt stainless steel heating elements
- Brass drain valves

**GE30S08BAM** (not shown)  
• Thermostat

• Two 5,500-watt copper heating elements



**GE40L08BSM**  
**GE 36-GALLON RATED CAPACITY LOWBOY**

- Family size 2 to 4\*
- Thermostat
- Two 5,500-watt copper heating elements
- 63-gallon First Hour Rating
- Side port

**GE40L08BAM** (not shown)  
• Top port

• 61-gallon First Hour Rating



**GE30L08BSM**  
**GE 26-GALLON RATED CAPACITY LOWBOY**

- Family size 1 to 3\*
- Thermostat
- Two 5,500-watt copper heating elements
- 58-gallon First Hour Rating
- Side port

**GE30L08BAM** (not shown)  
• Top port

• 53-gallon First Hour Rating

\*Household sizing based on back-to-back showers, 8 minutes long. Complete features and specifications on page 320.





# FLEXIBLE-CAPACITY ELECTRONIC WATER HEATERS


Up to 60% more hot water on X-High setting\*

## FEATURE HIGHLIGHTS



### FLEXIBLE CAPACITY

Choose from three capacity settings to enjoy up to 60% additional hot water when you need it.\*



### INTEGRATED, ELECTRONIC MIXING VALVE

Access additional hot water to accommodate guests with a valve that lets users select from three capacity settings: Normal, High and X-High.



### BUILT-IN WIFI

Easily change water capacity setting, adjust temperatures, set vacation mode, schedules and receive notifications with Built-in WiFi powered by SmartHQ™.

## FLEXIBLE-CAPACITY ELECTRONIC WATER HEATERS



- GE50S10BMM**  
**GE 50-GALLON RATED CAPACITY**
- Integrated, electronic mixing valve
  - Performs like an 80-gallon on X-High setting\*
  - Up to 60% more hot water on X-High setting\*
  - Family size: 3 to 6\*\*
  - Electronic controls
  - Built-in WiFi powered by SmartHQ
  - Normal/Vacation modes
  - 75-gallon First Hour Rating
  - Two 5,500-watt stainless steel heating elements
  - Brass drain valve



- GE40S10BMM**  
**GE 40-GALLON RATED CAPACITY**
- Integrated, electronic mixing valve
  - Performs like a 64-gallon on X-High setting\*
  - Up to 60% more hot water on X-High setting\*
  - Family size: 2 to 5\*\*
  - Electronic controls
  - Built-in WiFi powered by SmartHQ
  - Normal/Vacation modes
  - 65-gallon First Hour Rating
  - Two 5,500-watt stainless steel heating elements
  - Brass drain valve



- GE30S10BMM**  
**GE 30-GALLON RATED CAPACITY**
- Integrated, electronic mixing valve
  - Performs like a 48-gallon on X-High setting\*
  - Up to 60% more hot water on X-High setting\*
  - Family size: 1 to 4\*\*
  - Electronic controls
  - Built-in WiFi powered by SmartHQ
  - Normal/Vacation modes
  - 59-gallon First Hour Rating
  - Two 5,500-watt stainless steel heating elements
  - Brass drain valve

\*Versus comparable water heater without mixing valve at 120° F setting and 58° F inlet water temperature. Not all features available on all models.

\*\*Household sizing based on back-to-back showers, 8 minutes long. Complete features and specifications on page 321.





# GEOSPRING™ SOLAR WATER HEATERS

## FEATURE HIGHLIGHTS




### INTERNAL TANK COATING

Resilient internal coating offers maximum corrosion resistance and trouble-free performance.



### STORAGE PIPES


An integrated solar collector allows the tank to maintain hot water temperatures even if the sun isn't shining.



### SERPENTINE SYSTEM

Water is heated and stored directly in the solar collector, making hot water available as soon as it is heated by the sun.


## GEOSPRING SOLAR WATER HEATERS

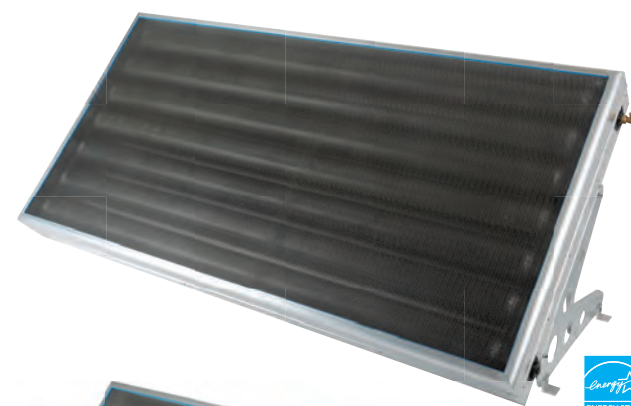

### GT50C10BAM

#### 51-GALLON WITH INTEGRATED COLLECTOR STORAGE


- GeoSpring Solar technology
- Solar glass for efficient water heating
- Clear heat insulation delivers maximum heat retention
- Integrated storage pipes maintain temperatures even when the sun is not shining
- Serpentine system makes hot water available immediately
- Internal tank coating offers maximum corrosion resistance

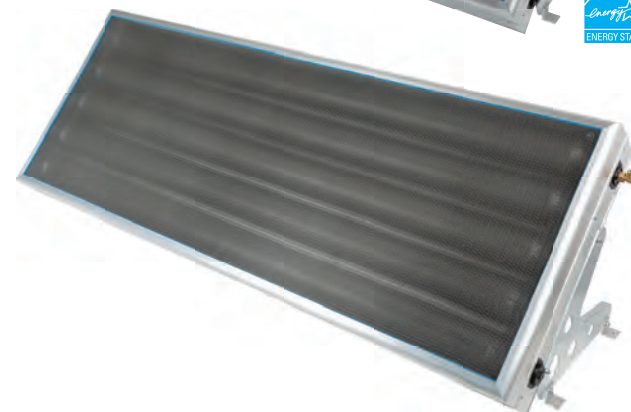

### GT40C10BAM

#### 38-GALLON WITH INTEGRATED COLLECTOR STORAGE


- GeoSpring Solar technology
- Solar glass for efficient water heating
- Clear heat insulation delivers maximum heat retention
- Integrated storage pipes maintain temperatures even when the sun is not shining
- Serpentine system makes hot water available immediately
- Internal tank coating offers maximum corrosion resistance

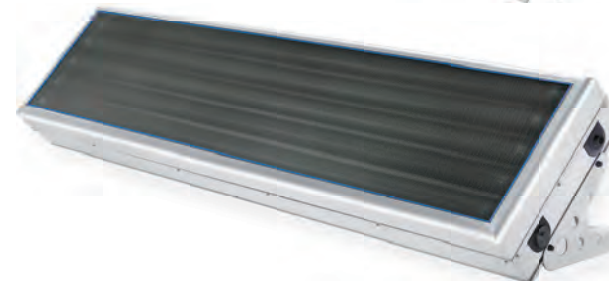


### GT25C10BAM

#### 24-GALLON WITH INTEGRATED COLLECTOR STORAGE


- GeoSpring Solar technology
- Solar glass for efficient water heating
- Clear heat insulation delivers maximum heat retention
- Integrated storage pipes maintain temperatures even when the sun is not shining
- Serpentine system makes hot water available immediately
- Internal tank coating offers maximum corrosion resistance

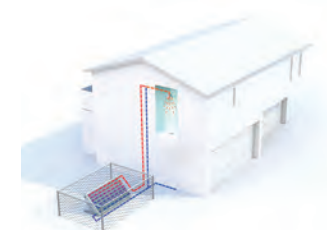


Ground mount installation

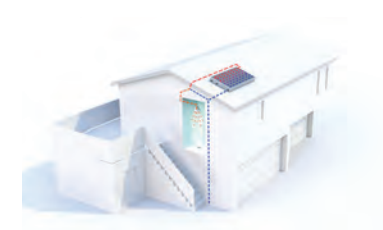


Pitched roof installation

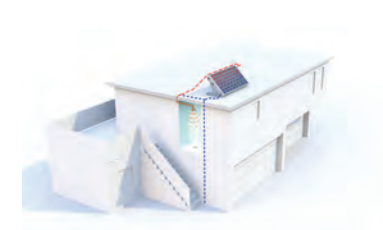

Flat roof installation

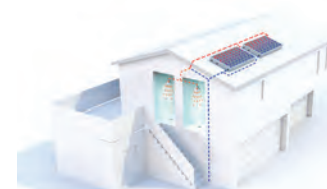

Connected in parallel installation

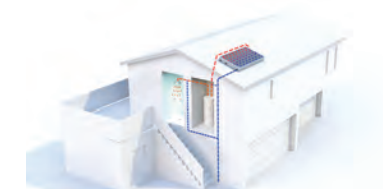

Combined with additional storage tank installation





# WATER SOFTENERS

## FEATURE HIGHLIGHTS



### CUSTOM SELECT™ BLENDING VALVE

Allows you to select how soft you want your water.



### WIFI ALERTS AND REMOTE SHUTOFF

Receive alerts to your smartphone when there's a potential leak or running faucet.\*

\*Requires WiFi signal at softener location.



### SALT SAVER

Spend less time maintaining your system and more time enjoying it with Salt Saver, which reduces consumption.

## WATER SOFTENERS



- GXSHC40N**  
**GE SMART WATER SOFTENER**
- Built-in WiFi powered by SmartHQ™
  - Flow alerts—WiFi
  - Remote shutoff—WiFi
  - GE Appliances' exclusive Custom Select blending valve allows you to select how soft you want your water
  - GE Appliances' Salt Saver helps reduce salt consumption
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - Reduces chlorine taste and odor with built-in water filtration
  - Low salt reminders—WiFi
  - Water consumption tracking—WiFi
  - 40,000 grain capacity
  - Up-front electronic controls with status indicator light
  - Self-cleaning sediment filter protects your home's plumbing
  - Plumbing connection up to 1-1/4"

**GXSH40V**  
Similar to the GXSHC40N, except no WiFi



- GXSH45V**  
**GE WATER SOFTENER**
- GE Appliances' exclusive SmartSoft™ technology
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - Reduces chlorine taste and odor with built-in water filtration
  - 45,100 grain capacity
  - GE Appliances' exclusive Custom Select blending valve allows you to select how soft you want your water
  - GE Appliances' exclusive Salt Saver helps reduce salt consumption
  - Uses up to 35% less water\*
  - Up-front electronic controls with status indicator light
  - Self-cleaning sediment filter
  - Salt capacity: 230 lbs.
  - Plumbing connection up to 1-1/4"

\*Versus previous GE Appliances water softeners and WQA water usage studies.

Complete features and specifications on page 322.  
See page 227 for ADA requirements.  
For definitions of logos, see pg. 9.



- GXMH31H**  
**GE WATER SOFTENER & FILTER IN ONE**
- Reduces chlorine taste and odor with built-in water filtration
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - 31,100 grain capacity
  - Self-cleaning sediment filter
  - GE Appliances' exclusive Custom Select blending valve allows you to select how soft you want your water
  - Up-front electronic controls with status indicator light
  - Salt capacity: 230 lbs.
  - Plumbing connection up to 1-1/4"
  - GE Appliances' exclusive Salt Saver helps reduce salt consumption



- GXSF30V**  
**GE WATER SOFTENER**
- GE Appliances' exclusive SmartSoft technology
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - Reduces chlorine taste and odor with built-in water filtration
  - 30,100 grain capacity
  - Uses up to 20% less water\*
  - Salt capacity: 200 lbs.
  - Plumbing connection up to 1"
  - GE Appliances' Salt Saver helps reduce salt consumption





# UNDER-SINK WATER FILTRATION

## FEATURE HIGHLIGHTS




### FILTRATION WHERE YOU NEED IT MOST

Easily installs under most sinks.



### BETTER-TASTING WATER

Filtered water improves the flavor of coffee, tea, other beverages and food.



### PREMIUM FILTRATION

Removes impurities such as lead, PFOS, PFOA, select pharmaceuticals and more.

## UNDERSINK FILTRATION

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



PREMIUM  
ADVANCED  
BASIC

### GXRQ18NBN

#### GE REVERSE OSMOSIS FILTRATION SYSTEM

- Reverse osmosis triple-stage filtration—water is filtered 3 times
- **Reduces 95 impurities that can be found in drinking water, including lead\***
- Designer faucet
- **Small footprint**
- NSF/ANSI certified
- **Easy-change filter—filter in a snap with zero mess thanks to a twist/lock design**
- Easy install
- Replacement filters: FQ18MN and FQ18PN
- Filters included
- Brushed nickel faucet



PREMIUM  
ADVANCED  
BASIC

### GXK285JBL

#### GE HIGH-FLOW FILTRATION SYSTEM

- **Dual-flow filtration process—1.1 gallons per minute**
- Lead reduction
- Filtered water through existing faucet
- Dedicated controller turns filtration on/off
- Quick-replace filter—no water shutoff needed
- Recommended filter replacement every 6 months
- System includes: Filtration system, dual-flow filters, chrome filtration controller, batteries, tubing & fittings
- Replacement filter: FQK2J

USE APPLIANCE ACCOUNT GNK285KBL

Similar to the GNRQ18NBN



PREMIUM  
ADVANCED  
BASIC

### GXULQK

#### GE HIGH-FLOW FAUCET FILTRATION SYSTEM

- Lead reduction
- Single-stage filtration means water is filtered once
- **High-flow filtered water through main faucet**
- Magnetic filter change reminder light
- Quick-replace filter—no water shutoff needed
- Recommended filter replacement every 6 months or 2,000 gallons
- Filter included
- Replacement filter: GXULQR



PREMIUM  
ADVANCED  
BASIC

### GXK185KBL

#### GE SINGLE-STAGE DRINKING WATER FILTRATION SYSTEM

- Lead reduction
- Dedicated controller turns filtration on/off
- Quick-replace filter—no water shutoff needed
- Recommended filter replacement every 6 months
- System includes: Filtration system, dual-flow filters, chrome filtration controller, batteries, tubing & fittings
- Replacement filter: FQK1K



PREMIUM  
ADVANCED  
BASIC

### GX1S01R

#### GE DRINKING WATER FILTRATION SYSTEM

- Lead reduction with FXUVC or FXULC
- System installs below kitchen sink
- Filtered water recommended through dedicated faucet (UNFCTFBL - Faucet sold separately)
- 6-month filter life (varies with local water conditions)
- Filter not included
- Replacement filters: FXUVC (Advanced) FXULC (Advanced) FXUTC (Basic)





# WHOLE HOME FILTRATION

## FEATURE HIGHLIGHTS



### CLEAN WATER IN EVERY ROOM

Filter water at the source for better-tasting water with fewer impurities\* at every faucet.



### WIFI ALERTS AND REMOTE SHUTOFF

Receive alerts to your smart phone when there's a potential leak or running faucet.\*

\*Requires WiFi signal at filter location.



### EASY INSTALLATION

Install the system in minutes with push-to-connect fittings and rotating pivot head.

## WHOLE HOME FILTRATION

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



PREMIUM  
ADVANCED  
BASIC

### GXWH70M

#### GE SMART WHOLE HOME FILTRATION SYSTEM

- **Built-in WiFi powered by SmartHQ™ (leak detection, remote water shutoff, consumption tracking, filter change reminders)**
- **Lead reduction with FTHLM**
- High or standard flow
- Premium filtration (filter sold separately)
- Easy Install (push-to-connect fittings)
- 3-position valve with bypass option for drier filter change
- Filter not included
- Compatible filters: FTHLM (Premium) FHTM (Advanced) FTHPM (Basic)

### GNWH70M

Similar to the GXWH70M

USE APPLIANCE ACCOUNT GNWH70M



PREMIUM  
ADVANCED  
BASIC

### GXWH50M

#### GE WHOLE HOME FILTRATION SYSTEM

- High or standard flow
- Premium filtration (filter sold separately)
- **Lead reduction with FTHLM**
- **Easy install (push-to-connect fittings)**
- 3-position valve with bypass option for drier filter change
- Includes magnetic filter reminder light
- Filter not included
- Compatible filters: FTHLM (Premium) FHTM (Advanced) FTHPM (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH40L

#### GE HIGH-FLOW WHOLE HOUSE FILTRATION SYSTEM WITH CLEAR SUMP

- High flow
- Customize filtration (filter sold separately)
- **Clear sump to view filter soil level—reduces dirt, silt, sand and rust from your water**
- **3-position valve with bypass option and red pressure release button for drier filter change**
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter not included
- Compatible filters: FXHTC (Advanced) FXHSC (Basic)

USE APPLIANCE ACCOUNT GNWH38S



PREMIUM  
ADVANCED  
BASIC

### GXWH35F

#### GE HIGH-FLOW WHOLE HOUSE FILTRATION SYSTEM

- **High flow**
- Customize filtration (filter sold separately)
- Reduces dirt, silt, sand and rust from your water
- Red pressure release button for drier filter change
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter not included
- Compatible filters: FXHTC (Advanced) FXHSC (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH20S

#### GE STANDARD-FLOW WHOLE HOUSE FILTRATION SYSTEM WITH CLEAR SUMP

- Standard flow
- **FXUSC filter included**
- **Clear sump to view filter soil level—reduces dirt, silt, sand and rust from your water**
- **3-position valve with bypass option and red pressure release button for drier filter change**
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter included
- Compatible filters: FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH04F

#### GE STANDARD-FLOW WHOLE HOUSE FILTRATION SYSTEM

- Standard flow
- Customize filtration (filter sold separately)
- Reduces dirt, silt, sand and rust from your water
- Red pressure release button for drier filter change
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter not included
- Compatible filters: FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)





**CONSUMER  
COMFORT  
PRODUCTS**





# WINDOW ROOM AIR CONDITIONERS

## FEATURE HIGHLIGHTS



### REMOTE CONTROL

Hand-held controller makes operating the air conditioner extra easy.



### ENERGY SAVER FEATURE

Once the room is cool enough, the Energy Saver feature shuts down the fan and compressor, saving energy and money.



### POWER INTERRUPTION RESTART

Following an outage, the unit automatically resumes operation at the prior temperature setting.

## ULTRA-QUIET ROOM AIR CONDITIONERS SEASONAL AVAILABILITY ONLY



### PHC06LY

#### GE PROFILE™ SMART WINDOW UNIT

- 6,000 BTU, 12.1 CEER, 115 Volts
- Fixed chassis
- Quietest in the Industry\*
- Electronic digital thermostat with remote
- EZ Mount window kit
- Connected peace of mind
- Connected performance
- Connected voice control
- Auto dimming
- Filter reminder
- Delay function




### PHC08LY

#### GE PROFILE SMART WINDOW UNIT

- 8,000 BTU, 11.2 CEER, 115 Volts
- Fixed chassis
- 50% quieter than similar GE models based on perceived loudness\*\*
- Electronic digital thermostat with remote
- EZ Mount window kit
- Connected peace of mind
- Connected performance
- Connected voice control
- Auto dimming
- Filter reminder
- Delay function



## WINDOW ROOM AIR CONDITIONERS SEASONAL AVAILABILITY ONLY

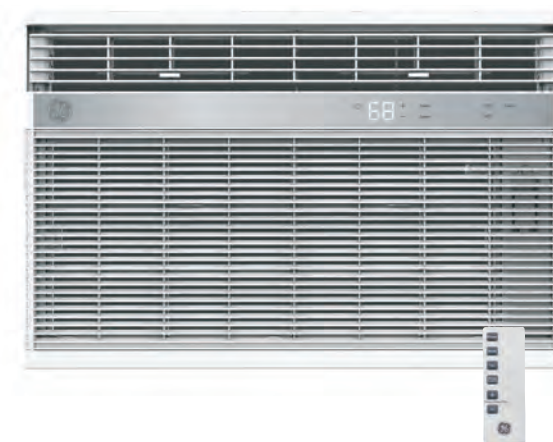

### AHY24DZ

#### GE SMART ELECTRONIC UNIT


- 23,500/22,900 BTU, 9.8 CEER, 230/208 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with slide-out chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- Non-ozone-depleting refrigerant (R-410A)
- 24-hour on/off timer



\*Based on published data.  
\*\*Based on perceived loudness.  
While limited quantities last.  
Complete features and specifications on page 325.  
For definitions of logos, see page 9.



WINDOW ROOM AIR CONDITIONERS SEASONAL AVAILABILITY ONLY

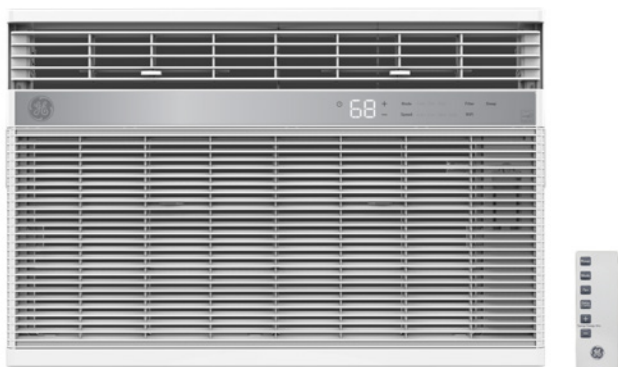

- AHY18DZ**  
**GE SMART ELECTRONIC UNIT**
- 18,000/17,800 BTU, 11.3 CEER, 230/208 Volts
  - Electronic digital thermostat with remote
  - 3 cool/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Energy Saver feature
  - Filter reminder light
  - Power interruption restart
  - Non-ozone-depleting refrigerant (R-410A)
  - 24-hour on/off timer



- AHY14LZ**  
**GE SMART ELECTRONIC UNIT**
- 14,000 BTU, 11.3 CEER, 115 Volts
  - Electronic digital thermostat with remote
  - 3 cool/3 fan speeds
  - EZ Mount window kit with fixed chassis
  - Energy Saver feature
  - Filter reminder light
  - Power interruption restart
  - R32 refrigerant
  - 24-hour on/off timer



- AHY08LZ**  
**GE SMART ELECTRONIC UNIT**
- 8,000 BTU, 11.4 CEER, 115 Volts
  - Electronic digital thermostat with remote
  - 3 cool/3 fan speeds
  - EZ Mount window kit with fixed chassis
  - Energy Saver feature
  - Filter reminder light
  - Power interruption restart
  - R32 refrigerant
  - 24-hour on/off timer




- AHQ06LZ**  
**GE ELECTRONIC UNIT**
- 6,000 BTU, 11.0 CEER, 115 Volts
  - Electronic digital thermostat with remote
  - 3 cool/3 fan speeds
  - EZ Mount window kit with fixed chassis
  - Energy Saver feature
  - Power interruption restart
  - R32 refrigerant
  - 24-hour on/off timer



- AHY12LZ**  
**GE SMART ELECTRONIC UNIT**
- 12,000 BTU, 11.4 CEER, 115 Volts
  - Electronic digital thermostat with remote
  - 3 cool/3 fan speeds
  - EZ Mount window kit with fixed chassis
  - Energy Saver feature
  - Filter reminder light
  - Power interruption restart
  - R32 refrigerant
  - 24-hour on/off timer



- AHY10LZ**  
**GE SMART ELECTRONIC UNIT**
- 10,000 BTU, 11.4 CEER, 115 Volts
  - Electronic digital thermostat with remote
  - 3 cool/3 fan speeds
  - EZ Mount window kit with fixed chassis
  - Energy Saver feature
  - Filter reminder light
  - Power interruption restart
  - R32 refrigerant
  - 24-hour on/off timer

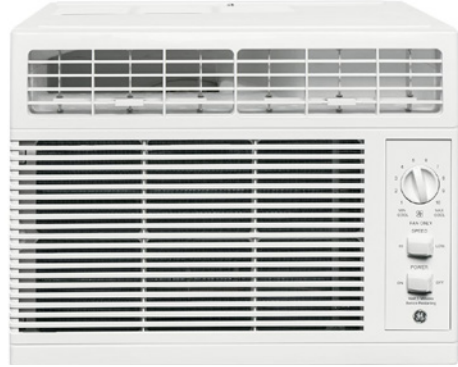

- AHV05LZ**  
**GE MECHANICAL UNIT**
- 5,050 BTU, 11.0 CEER, 115 Volts
  - Mechanical thermostat
  - 2 cool/2 fan speeds
  - EZ Mount window kit with fixed chassis
  - R32 refrigerant

While limited quantities last.  
Complete features and specifications on page 325.  
For definitions of logos, see page 9.



WINDOW ROOM AIR CONDITIONERS SEASONAL AVAILABILITY ONLY



- AEE24DT**  
**GE HEAT/COOL UNIT**

  - 24,000/23,600 BTU (Cool), 9.4/9.4 CEER, 230/208 Volts
  - 11,000/8,700 BTU (Heat)
  - Electronic digital thermostat with remote
  - Energy Saver feature
  - 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
- Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter



- AEE12DT**  
**GE HEAT/COOL UNIT**

  - 11,800/11,600 BTU (Cool), 10.9/10.9 CEER, 230/208 Volts
  - Adjustable thermostat
  - Electronic digital thermostat with remote
  - Energy Saver feature
- 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter



- AEE08AT\***  
**GE HEAT/COOL UNIT**

  - 8,000 BTU (Cool), 10.9 CEER, 115 Volts
  - 3,800 BTU (Heat)
  - Electronic digital thermostat with remote
  - Energy Saver feature
- 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter

While limited quantities last.  
Complete features and specifications on page 326.  
For definitions of logos, see page 9.

\*Not intended to be a primary source of heat.



PORTABLE ROOM AIR CONDITIONERS



- APWA14YZMW**  
**GE PORTABLE AIR CONDITIONER**
- Cools up to 550 sq. ft.
  - 9,500 SACC
  - Electronic controls
  - Full-function remote
  - 3 cool/3 fan speeds
  - 24-hour timer
  - Dehumidify Mode
  - CEC compliant



- APCA14YZMW**  
**GE PORTABLE AIR CONDITIONER**
- Cools up to 250 sq. ft.
  - 5,500 SACC
  - Electronic controls
  - Full-function remote
  - 3 cool/3 fan speeds
  - 24-hour timer
  - Dehumidify Mode
  - CEC compliant

While limited quantities last.  
Complete features and specifications on page 326.  
For definitions of logos, see page 9.



PORTABLE ROOM AIR CONDITIONERS



- APSA13YZMW**  
**GE PORTABLE AIR CONDITIONER**
- Cools up to 550 sq. ft.
  - 9,000 SACC
  - 10,000 BTU Heat
  - Heat Pump Mode
  - Electronic controls
  - Full-function remote
  - 3 cool/3 fan/3 heat speeds
  - 24-hour timer
  - Dehumidify Mode
  - CEC compliant



- APCA12YZMW**  
**GE PORTABLE AIR CONDITIONER**
- 8,000 SACC
  - Cools up to 450 square feet
  - Cools a medium room (18 ft. x 22 ft.)
  - 3 cool/3 fan speeds
  - Auto evaporation technology
  - Cool, fan and dehumidify modes
  - Full-function remote
  - 24-hour timer



- APCA10YZMW**  
**GE PORTABLE AIR CONDITIONER**
- 6,500 SACC
  - Cools up to 350 square feet
  - Cools a medium room (15 ft. x 20 ft.)
  - 3 cool/3 fan speeds
  - Auto evaporation technology
  - Cool, fan and dehumidify modes
  - Full-function remote
  - 24-hour timer



- APCA09YZMW**  
**GE COOL UNIT**
- Cools up to 250 sq. ft.
  - 5,500 SACC
  - Electronic controls
  - Full-function remote
  - 3 cool/3 fan speeds
  - 24-hour timer
  - Dehumidify Mode
  - CEC compliant



DEHUMIDIFIER

SEASONAL AVAILABILITY ONLY



- APER50LZ**  
**GE DEHUMIDIFIER**
- 50 pints per day per new DOE\* requirements
  - Digital humidistat
  - Built-in pump
  - 3 fan speeds
  - Filter check reminder
  - Bucket full indicator
  - 2 hour/4 hour delay timer
  - Auto restart and defrost
  - Easy-roll casters
  - Permanent washable filter
  - Direct drain connection



\*Department of Energy

While limited quantities last.  
Complete features and specifications on page 326.  
For definitions of logos, see page 9.





# BUILT-IN ROOM AIR CONDITIONERS

## FEATURE HIGHLIGHTS

### 24" THROUGH-THE-WALL

#### UNIVERSAL FIT

Simple slide-in installation is made for a precise fit into a variety of different wall sleeves.  
*Trim kit and installation kit included.*

#### LARGE LCD DISPLAY

Intuitive and easy-to-read LCD display controls room air comfort at a single touch.

#### DRY MODE

Designed for humid environments, it helps provide a dryer and more comfortable environment with room-air dehumidification.

#### ECO MODE

Innovative mode where the fan cycles off between cooling intervals, saving energy while keeping the room comfortable.

### 26" BUILT-IN AIR CONDITIONERS

#### TRUE BUILT-IN DESIGN

The ultimate fit and finish for more usable space and the best in built-in installation. Sleeve and chassis are perfectly matched, creating a seamless fit without leaks or gaps.

#### ELECTRONIC CAP TOUCH CONTROLS

Controls offer a high-end and smooth-to-the-touch panel.

#### DRY MODE

Designed for humid environments, it helps provide a dryer and more comfortable environment with room-air dehumidification.

#### AUTO MODE

Automatically selects heating\* or cooling mode and fan speed to maintain the current temperature set point. It monitors the room temperature for optimal comfort.

Not all features available on all models.  
\*Heat/cool models only.

## BUILT-IN ROOM AIR CONDITIONERS



**ACCESSORY**  
**RAB24** Wall sleeve

### GE 24" THROUGH-THE-WALL, STANDARD-MOUNT

#### COOL-ONLY UNITS

**AKCQ10DCH**  
10,200/9,900 BTU, 10.6/  
10.6 CEER, 230/208 Volts

**AKCQ12DCH**  
12,100/11,750 BTU, 10.5/  
10.5 CEER, 230/208 Volts

**AKCQ14DCH<sup>†</sup>**  
14,000/14,000 BTU, 9.3/  
9.3 CEER, 230/208 Volts  
\*Not ENERGY STAR certified.

**AKCQ08ACH**  
8,550 BTU, 10.6 CEER,  
115 Volts

**AKCQ10ACH**  
10,000 BTU, 10.6 CEER,  
115 Volts

**AKCQ12ACH**  
12,000 BTU, 10.5 CEER,  
115 Volts

#### HEAT/COOL UNITS

**AKEQ10DCH**  
10,000/9,800 BTU, 9.6/  
9.6 CEER, 230/208 Volts

**AKEQ12DCH**  
12,000/11,600 BTU, 9.5/  
9.5 CEER, 230/208 Volts

**AKEQ14DCH**  
14,000/13,600 BTU, 9.3/  
9.3 CEER, 230/208 Volts



### GE STANDARD-MOUNT, COOL-ONLY UNITS\*\*

**AJCQ10DCH**  
10,150/9,900 BTU, 10.6/10.6  
CEER, 230/208 Volts

**AJCQ12DCH**  
12,000/11,700 BTU, 10.5/10.5  
CEER, 230/208 Volts

**AJCQ14DCH<sup>†</sup>**  
14,000/13,600 BTU, 9.3/9.3  
CEER, 230/208 Volts  
\*Not ENERGY STAR certified

**AJCQ06LCH**  
6,300 BTU, 11.0 CEER, 115 Volts

**AJCQ08ACH**  
8,400 BTU, 10.6 CEER, 115 Volts

**AJCQ10ACH**  
10,000 BTU, 10.6 CEER, 115 Volts

**AJCQ12ACH**  
12,000 BTU, 10.5 CEER, 115 Volts



### GE HIGH-MOUNT, COOL-ONLY UNITS\*\*

**AJCM10DCH**  
10,150/9,900 BTU, 10.6/10.6  
CEER, 230/208 Volts

**AJCM12DCH**  
12,000/11,700 BTU, 10.5/10.5  
CEER, 230/208 Volts

**AJCM08ACH**  
8,400 BTU, 10.6 CEER, 115 Volts

**AJCM10ACH**  
10,000 BTU, 10.6 CEER, 115 Volts



### GE STANDARD-MOUNT HEAT/COOL UNITS\*\*

**AJEQ08ACH\*\*\***  
8,300 BTU cool, 4,200 BTU  
heat, 9.6 CEER, 115 Volts

**AJEQ10DCH**  
10,000/9,800 BTU cool,  
10,600/8,600 BTU heat,  
9.6/9.6 CEER, 230/208 Volts

**AJEQ12DCH**  
12,000/11,700 BTU cool,  
10,600/8,600 BTU heat,  
9.5/9.5 CEER, 230/208 Volts

**AJEQ14DCH**  
14,000/13,600 BTU, 9.3/9.5  
CEER, 230/208 Volts

#### HEAT PUMPS

**AJHQ08ACH**  
8,200 BTU, 9.8 CEER, 115 Volts

**AJHQ12DCH**  
11,800/11,600 BTU, 9.6/9.6  
CEER, 230/208 Volts



### GE HIGH-MOUNT HEAT/COOL UNIT\*\*

**AJEM12DCH**  
12,000/11,700 BTU cool, 10,600/8,600 BTU  
heat, 9.5 /9.5 CEER, 230/208 Volts

#### ACCESSORIES


**RAB46A** Standard wall sleeve  
**RAG13A** Stamped aluminum grille  
**RAG14E** Architectural grille

**RAB26A** Standard wall sleeve  
**RAK26TO** Wall sleeve

**Specifications subject to change.**  
Complete features and specifications on pages 327-328.  
See page 227 for Accessibility Requirements.  
For definitions of logos, see page 9.


\*\*Wall case sold separately and includes RAG13A aluminum grill.  
\*\*\*This unit is not intended to be the primary source of heat.



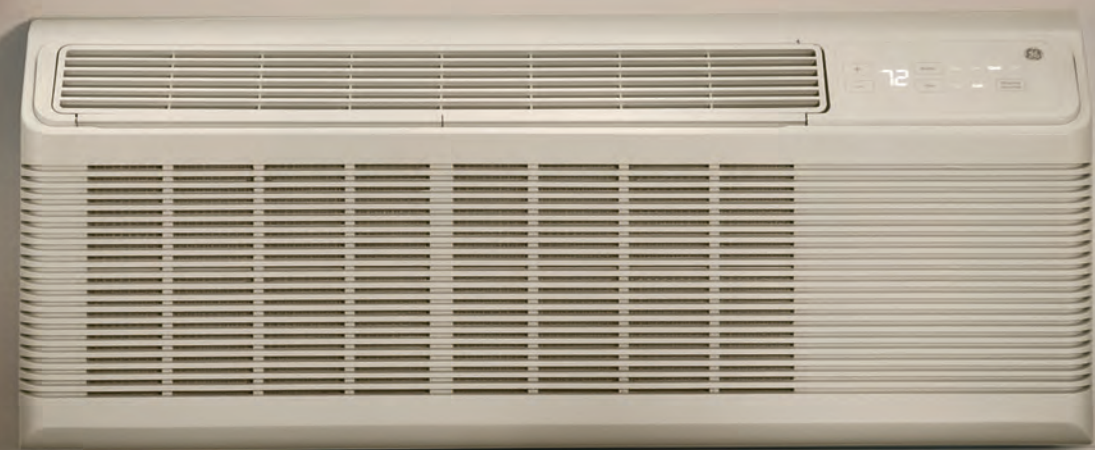

# ZONELINE® PACKAGED TERMINAL AIR CONDITIONERS

## FEATURE HIGHLIGHTS




### QUIETEST PTAC IN THE INDUSTRY\*

Zoneline has the largest fan vs. leading competitor designs, which means less rotation and quieter performance.



### BLOWER & DC MOTORS

Large cross-flow blower, two DC fan motors and smart-fan cooling and heating keep the unit quiet while providing efficient performance.



### PREMIUM GUARD CORROSION PROTECTION

Special coatings, paints and stainless steel ensure lasting performance in challenging environments such as oceanfront properties.



### WEATHER BARRIER SYSTEM SEAL

Keeps noise, dirt and grime outside.  
Creates a quieter room and more efficient operation.



### HEAT & FREEZE SENTINEL

Keeps room from overheating or freezing to increase efficiency and comfort while decreasing operating and maintenance costs.



### SYSTEM COMPATIBILITY

Compatible with a wide variety of 24VAC thermostats and energy management systems, including central desk control.



### MAKEUP AIR

A factory-installed secondary system provides continuous outdoor air. The supplemental dehumidification system operates when relative humidity levels rise above 55%.



### INTERNAL CONDENSATE REMOVAL (ICR)

A system of piping and pump minimizes the amount of condensate draining from the unit when in heat pump mode.



### DRY AIR 25\*\*

Zoneline Dry Air models remove 20%-35% more moisture from the air than standard Zoneline air conditioners\*\*, making them perfect for high-humidity climates.

\*When compared to leading competitors. 12,000 BTU/h heat pump models tested by independent third party at a national acoustical lab, in accordance with ASTM and AHRI standards. All Zonelines have an STC of 29. The higher the STC, the better the unit blocks outside noise.  
\*\*Varies when comparing dehumidification rates of the 7,000/9,000/12,000 BTU base models to their Dry Air model counterparts. AZ45 Series electric resistance models only.



ZONELINE® PACKAGED TERMINAL AIR CONDITIONERS



AZ45 SERIES | COOLING AND ELECTRIC HEAT

<ul style="list-style-type: none"><li>Digital LED display</li><li>Variable fresh air vent control</li><li>Cross-flow blower</li><li>Two DC fan motors</li><li>Smart fan cooling</li><li>Heat and Freeze Sentinel</li><li>Remote thermostat capability</li><li>Electronic temperature limiting</li><li>Works with central desk control and through wall fans</li></ul>	BASE	PREMIUM GUARD CORROSION PROTECTION		DRY AIR 25 WITH CORROSION PROTECTION	
	AZ45E07DAB	AZ45E07DAC	AZ45E07EAC	AZ45E07DAP	
	7,200/7,000 BTU 13.4/13.4 EER 230/208 Volts	7,200/7,000 BTU 13.4/13.4 EER 230/208 Volts	7,100 BTU 13.2 EER 265 Volts	6,900/6,800 BTU 12.8/12.8 EER 230/208 Volts	
	AZ45E09DAB	AZ45E09DAC	AZ45E09EAC	AZ45E09DAP	AZ45E09EAP
	9,700/9,600 BTU 12.1/12.1 EER 230/208 Volts	9,400/9,300 BTU 11.8/11.8 EER 230/208 Volts	9,500 BTU 11.6 EER 265 Volts	9,400/9,300 BTU 12.1/12.1 EER 230/208 Volts	9,400 BTU 12.1 EER 265 Volts
	AZ45E12DAB	AZ45E12DAC	AZ45E12EAC	AZ45E12DAP	AZ45E12EAP
	11,600/11,500 BTU 11.7/11.8 EER 230/208 Volts	11,600/11,500 BTU 11.7/11.8 EER 230/208 Volts	11,500 BTU 11.7 EER 265 Volts	11,200/11,000 BTU 11.4/11.5 EER 230/208 Volts	10,900 BTU 11.0 EER 265 Volts
	AZ45E15DAB	AZ45E15DAC	AZ45E15EAC		
14,600/14,500 BTU 10.5/10.5 EER 230/208 Volts	14,600/14,500 BTU 10.5/10.5 EER 230/208 Volts	14,800 BTU 10.8 EER 265 Volts			

AZ65 SERIES | HEAT PUMP

<p>Includes all resistance heat features, plus:</p> <ul style="list-style-type: none"><li>Staged heating</li><li>Heat pump with backup resistance heat option</li><li>Reverse cycle defrost</li></ul>	BASE	PREMIUM GUARD CORROSION PROTECTION		INTERNAL CONDENSATE REMOVAL	
	AZ65H07DAB	AZ65H07DAC	AZ65H07EAC	AZ65H07DAD	AZ65H07EAD
	7,100/6,900 BTU cool 6,200/6,100 BTU heat 13.0/13.0 EER 4.0/4.0 COP* 230/208 Volts	7,100/7,000 BTU cool 6,200/6,100 BTU heat 13.0/13.0 EER 4.0/4.0 COP* 230/208 Volts	7,000 BTU cool 6,200 BTU heat 12.8 EER 3.9 COP* 265 Volts	7,000/6,900 BTU cool 6,200/6,000 BTU heat, 13.0/13.0 EER, 4.0/4.0 COP* 230/208 Volts	7,000 BTU cool 6,200 BTU heat 12.8 EER 3.9 COP* 265 Volts
	AZ65H09DAB	AZ65H09DAC	AZ65H09EAC	AZ65H09DAD	AZ65H09EAD
	9,700/9,600 BTU cool 8,100/8,000 BTU heat 12.2/12.2 EER, 3.7/3.7 COP* 230/208 Volts	9,600/9,500 BTU cool 8,100/8,000 BTU heat 12.2/12.2 EER 3.7/3.7 COP* 230/208 Volts	9,500 BTU cool 8,100 BTU heat 11.7 EER 3.6 COP* 265 Volts	9,600/9,500 BTU cool 8,200/8,000 BTU heat, 12.0/12.0 EER, 3.6/3.6 COP* 230/208 Volts	9,500 BTU cool 8,100 BTU heat 11.7 EER 3.5 COP* 265 Volts
AZ65H12DAB	AZ65H12DAC	AZ65H12EAC	AZ65H12DAD	AZ65H12EAD	
11,900/11,800 BTU cool 10,400/10,300 BTU heat 11.7/11.9 EER 3.6/3.6 COP* 230/208 Volts	11,900/11,800 BTU cool 10,300/10,200 BTU heat 11.7/11.7 EER 3.6/3.6 COP* 230/208 Volts	11,900 BTU cool 10,400 BTU heat 11.6 EER 3.5 COP* 265 Volts	11,800/11,600 BTU cool 10,400/10,200 BTU heat, 11.5/11.5 EER, 3.5/3.5 COP* 230/208 Volts	11,900 BTU cool 10,300 BTU heat 11.6 EER 3.4 COP* 265 Volts	
AZ65H15DAB	AZ65H15DAC	AZ65H15EAC	AZ65H15DAD	AZ65H15EAD	
14,400/14,200 BTU cool 13,400/13,300 BTU heat 10.6/10.6 EER 3.3/3.3 COP* 230/208 Volt	14,400/14,200 BTU cool 13,200/13,000 BTU heat 10.4/10.4 EER 3.2/3.2 COP* 230/208 Volts	14,700 BTU cool 13,500 BTU heat 10.5 EER 3.2 COP* 265 Volts	14,300/14,100 BTU cool 13,500/13,400 BTU heat, 10.3/10.3 EER, 3.2/3.2 COP* 230/208 Volts	14,200 BTU cool 13,500 BTU heat 10.3 EER 3.2 COP* 265 Volts	

AZ45 SERIES | COOLING AND ELECTRIC HEAT WITH MAKEUP AIR

<p>Includes all AZ45 features, plus:</p> <ul style="list-style-type: none"><li>• Delivers 25-50 CFM of continuous makeup air</li><li>• Dehumidifies incoming air when outdoor relative humidity is above 55% and outdoor temperatures are above 50° F</li><li>• Motorized vent door</li><li>• May reduce the need for rooftop units</li></ul>	MAKEUP AIR		<p><b>NOTE:</b> Because makeup air increases room BTU load requirements and requires additional PTAC cooling or heating, the building's electrical needs may be impacted.</p> <p><b>NOTE:</b> Makeup air models are not recommended for installation within two miles of coastal areas.</p> <p><b>NOTE:</b> It is strongly recommended to install makeup air with wall thermostats.</p>
	AZ45E09DBM	AZ45E12DBM	
	9,100/9,100 BTU 11.5/11.5 EER 230/208 Volts	11,900/11,700 BTU 11.7/11.7 EER 230/208 Volts	

AZ65 SERIES | HEAT PUMP WITH MAKEUP AIR

<p>Includes all resistant heat makeup air features, plus:</p> <ul style="list-style-type: none"><li>Staged heating</li><li>Heat pump with backup resistance heat option</li><li>Reverse cycle defrost</li></ul>	MAKEUP AIR			
	AZ65H07DBM	AZ65H09DBM	AZ65H12DBM	AZ65H15DBM
	7,000/7,000 BTU cool 6,200/6,100 BTU heat 12.5/12.5 EER 4.0/4.0 COP* 230/208 Volts	9,200/9,100 BTU cool 8,000/7,900 BTU heat 11.3/11.3 EER 3.3/3.3 COP* 230/208 Volts	11,500/11,400 BTU cool 10,200/10,000 BTU heat, 11.2/11.2 EER 3.5/3.5 COP*, 230/208 Volts	14,200/14,500 BTU cool 13,500/13,400 BTU heat, 10.6/10.6 EER, 3.3/3.3 COP* 208/230 Volts
	AZ65H07EBM	AZ65H09EBM	AZ65H12EBM	
	6,900 BTU cool 6,000 BTU heat 12.5 EER 3.9 COP* 265 Volts	9,200 BTU cool 8,100 BTU heat 11.5 EER 3.6 COP* 265 Volts	11,800 BTU cool 10,400 BTU heat 11.4 EER 3.5 COP* 265 Volts	

\*Coefficient of Performance

ADDITIONAL ACCESSORIES—MAY BE REQUIRED FOR AZ45/AZ65 SERIES ZONELINE UNITS

MODEL #	DESCRIPTION	MODEL #	DESCRIPTION
RAA13	MERV 13 replacement air filter for RAK13 kit	RAK330D	230/208V power connection kit (30 amp) for direct-connected units
RAB71B	Wall sleeve		RAK315P 230/208V LCDI power cord connection kit (15 amp)
RAB7116B	Wall sleeve, 16", 45 & 65 only		RAK320P 230/208V LCDI power cord connection kit (20 amp)
RAB7118B	Wall sleeve, 18", 45 & 65 only		RAK330P 230/208V LCDI power cord connection kit (30 amp)
RAB7120B	Wall sleeve, 20", 45 & 65 only		RAK4002D Zoneline direct connect junction box (230V)*
RAB7124B	Wall sleeve, 24", 45 & 65 only	RAK515D	265V power connection kit (15 amp) for direct-connected units
RAB78B	Wall sleeve, 45 & 65 only		265V power connection kit (20 amp) for direct-connected units
RAB81	Quick Snap wall sleeve—unassembled		265V power connection kit (30 amp) for direct-connected units
RAB81B	Quick Snap wall sleeve—assembled		RAK530D 230/208V sub-base with (15 amp) power cord included
RAD10	Internal/external drain kit		RAK204D15C 230/208V sub-base with (20 amp) power cord included
RAG60	Stamped aluminum grille	RAK204D30C	230/208V sub-base with (30 amp) power cord included
RAG61/62/63	Architectural exterior grille(s), high-impact plastic. Beige, Maple and Dark Brown		RAK204U 230/208V non-electrical sub-base
RAG67	Extruded aluminum architectural grille		RAK204E15C 265V sub-base with (15 amp) power cord included
RAK13	MERV 13 Makeup air filter kit for AZ45/65 DBM/EBM models		RAK204E20C 265V sub-base with (20 amp) power cord included
RAK148D2	Solid-state digital manual heat pump thermostat (6 connection wires required)		RAK204E30C 265V sub-base with (30 amp) power cord included
	Solid-state digital programmable heat pump thermostat (6 connection wires required)	RAK315SP	230/208V power cord connection kit (15 amp) for sub-base connected units
	Digital two-fan-speed thermostat for heat pump (7 connection wires required)		230/208V power cord connection kit (20 amp) for sub-base connected units
	Solid-state digital resistance heat thermostat (5 connection wires required)		230/208V power cord connection kit (30 amp) for sub-base connected units
	Solid-state digital programmable resistance heat thermostat (5 connection wires required)		265V power cord connection kit (15 amp) for sub-base connected units
RAK164P2	Digital two-fan-speed thermostat for electric resistance (6 connection wires required)		265V power cord connection kit (20 amp) for sub-base connected units
	Wired/wireless wall thermostat with motion sensor, MUAM capable	RAK520P	265V power cord connection kit (30 amp) for sub-base connected units
	230/208V power connection kit (15 amp) for direct-connected units		
	230/208V power connection kit (20 amp) for direct-connected units		





# ZONELINE<sup>®</sup> SINGLE PACKAGED VERTICAL UNITS

## FEATURE HIGHLIGHTS

### REMOTE WALL THERMOSTAT **G**

All Zonline vertical and packaged terminal air conditioners are compatible with GE wall-mounted thermostats for remote operation. Digital, wireless and programmable thermostats are available (24 VAC).

### RELIABLE & QUIET **G**

Every component is engineered to provide exceptional performance, and backed by GE Appliances Warranty and Factory Service Network.

### VERTICAL SPACE-SAVING DESIGN **G**

Optimizes usable floor space.

### CORROSION TREATMENT ON OUTSIDE COILS **G**

Coating keeps each part performing at peak condition.

**P** GE Profile™ **G** GE Appliances

Not all features available on all models.



AZ91H09/12



AZ91H18

## HEAT PUMPS

### AZ91 SERIES

#### AZ91H09D2E AZ91H09D3E AZ91H09D5E

9,400/9,400 BTU cool  
8,400/8,400 BTU heat  
11.0/11.0 EER  
3.3/3.3 COP\*  
230/208 Volts

#### AZ91H09E2E AZ91H09E3E AZ91H09E5E

9,400 BTU cool  
8,500 BTU heat  
11.0 EER  
3.3 COP\*  
265 Volts

#### AZ91H12D2E AZ91H12D3E AZ91H12D5E

12,200/12,000 BTU cool  
11,100/10,900 BTU heat  
11.0/11.0 EER  
3.3/3.3 COP\*  
230/208 Volts

#### AZ91H12E2E AZ91H12E3E AZ91H12E5E

12,400 BTU cool  
11,300 BTU heat  
11.0 EER  
3.3 COP\*  
265 Volts

### LARGE CHASSIS

#### AZ91H18D2E AZ91H18D3E AZ91H18D5E

18,200/18,000 BTU cool  
16,800/16,400 BTU heat  
11.0/11.0 EER  
3.3/3.3 COP\*  
230/208 Volts

#### AZ91H18E2E AZ91H18E3E AZ91H18E5E

18,000 BTU cool  
16,700 BTU heat  
11.0 EER  
3.3 COP\*  
265 Volts

\*Coefficient of Performance  
See your Area Sales Manager for details.  
Specifications subject to change.  
Complete features and specifications on page 329.



VERTICAL ZONELINE® PARTS & ACCESSORIES



RAVAL2  
ALUMINUM OUTDOOR  
GRILLE—AZ90/91



RAVWPT8  
TELESCOPING WALL  
PLENUM FOR  
5-1/2" - 8" DEPTH



RAVWPT14  
TELESCOPING WALL  
PLENUM FOR  
8" - 14" DEPTH



RAVDP20  
DRAIN PAN KIT FOR 18K HP  
LARGE CHASSIS—AZ91H18\*\*E



RAVRG2  
RETURN-AIR GRILLE



RAVRG3  
ACCESS PANEL WITH  
RETURN-AIR GRILLE FOR  
LARGE CHASSIS—AZ91H18



RAVRG4  
ACCESS PANEL WITH  
RETURN AIR GRILLE FOR  
LARGE CHASSIS



RAVTRANS  
TRANSITION PIECE  
FOR REPLACEMENT  
OF AZ75/85 MODELS  
WITH NEW VTAC AZ90/91

\*\*Works with all current AZ91H18 models.

ZONELINE THERMOSTATS

AZ45 SERIES



RAK164D2  
COOLING WITH ELECTRIC HEAT  
DIGITAL REMOTE THERMOSTAT

- 24 VAC digital remote wall thermostat with single-stage cooling and single-stage heating for resistance heat models
- Requires 5-wire hookup



RAK164F2  
COOLING WITH ELECTRIC HEAT  
DIGITAL TWO-FAN-SPEED  
THERMOSTAT

- Two fan speeds
- 24 VAC digital remote wall thermostat with single-stage cooling and single-stage heating for resistance heat models
- Requires 6-wire hookup



RAK164P2  
COOLING WITH ELECTRIC HEAT  
PROGRAMMABLE REMOTE  
THERMOSTAT

- 24 VAC programmable remote wall thermostat with single-stage cooling and single-stage heating for resistance heat models
- Programmable for 7-day or 5+2-day programs
- Requires 5-wire hookup

AZ65/AZ91 SERIES



RAK148D2  
HEAT PUMP DIGITAL REMOTE  
THERMOSTAT

- 24 VAC digital remote wall thermostat with single-stage cooling and 2-stage heating for heat pump models
- Requires 6-wire hookup



RAK148F2  
HEAT PUMP DIGITAL  
TWO-FAN-SPEED THERMOSTAT

- Two fan speeds
- 24 VAC digital remote wall thermostat with single-stage cooling and 2-stage heating for heat pump models
- Requires 7-wire hookup



RAK148P2  
HEAT PUMP PROGRAMMABLE  
REMOTE THERMOSTAT

- 24 VAC programmable remote wall thermostat with single-stage cooling and 2-stage heating for heat pump models
- Programmable for 7-day or 5+2-day programs
- Requires 6-wire hookup



RAK180W1  
HEAT/COOL ENERGY MANAGEMENT  
THERMOSTAT-UNIVERSAL/HEAT  
PUMP THERMOSTAT

- 24 VAC
- Wired (2-wire) or wireless (battery)
- Occupancy detection for Energy Management and MUA control
- Compatible for cooling with electric heat or heat pump Zoneline models
- Customizable energy setbacks
- Plug-and-play installation
- Works with all Zonelines



CLEANING SUPPLIES



**WX10X10021**  
**CERAMA BRYTE® GAS GRATE CLEANING KIT**

- Formulated to deliver the extra cleaning needed to power through burnt-on deposits on gas grates and burner caps
- Kit includes:
  - 1 brass bristle cleaning brush
  - 4 cooktop cleaning pads
  - 16-oz. bottle of gas grate cleaner
- Not recommended for aluminum drip pans

Cerama Bryte is a registered trademark of Cerama Bryte, Inc.



**WX10X10020**  
**CERAMA BRYTE COMPLETE COOKTOP KIT**

- Keeps your cooktop looking like new
- Cleans and provides a protective coating for glass-ceramic cooktops
- Kit includes:
  - 18-oz. bottle of cooktop cleaner
  - 16-oz. bottle of touchup spray
  - 2-oz. bottle of burnt-on grease remover
  - 5 cooktop cleaning pads
  - 1 microfiber cleaning cloth
  - 1 scraper



**WX10X350**  
**CERAMA BRYTE CLEANING PADS**

- Non-woven fibers will not scratch surfaces
- Includes 4 pads (4" x 2-1/2")



**WX10X307**  
**CERAMA BRYTE MICROFIBER CLEANING CLOTHS**

- Can be used with Cerama Bryte cooktop cleaner or stainless steel cleaner
- Also usable as a dusting cloth
- Package of 2 durable cloths



**WX10X392**  
**CERAMA BRYTE APPLIANCE CLEANER**

- Quickly cleans dried starches (like potatoes and noodles) and greases (like bacon)
- Extra-strength—4 times the strength of regular all-purpose cleaners
- Safe to use around food preparation surfaces
- **Great on painted appliance finishes such as Black Stainless, Slate and Black Slate**
- 16-oz. bottle



**WX10X310**  
**CERAMA BRYTE GRANITE AND QUARTZ CLEANER**

- Cleans, polishes and helps protect sealed stone and solid-surface countertops
- Quick and easy removal of grease, watermarks and stains
- 16-oz. spray bottle



**WX10X391**  
**CERAMA BRYTE TOUCHUPS SPRAY**

- Safe on ALL smoothtop cooktops—**ideal for Induction!**
- Quickly and easily removes fingerprints, grease, water residue and smudges
- Easy-to-use trigger spray
- 16-oz. bottle
- For tough, dried-on residue, use Cerama Bryte Cooktop Cleaner, WX10X300



**WX10X320**  
**CERAMA BRYTE BURNT-ON GREASE REMOVER**

- Eliminates grease and burnt-on food from glass-ceramic cooktops
- 2-oz. bottle



**WX10X300**  
**CERAMA BRYTE COOKTOP CLEANER**

- Ideal for heavy, burnt-on residue
- Cleans and provides a protective coating for glass-ceramic cooktops
- Excellent for kitchen sinks and countertops
- Contains no phosphates
- 28-oz. bottle



**PM10X304**  
**CERAMA BRYTE COOKTOP SCRAPER**

- Single-edge angled razor blade in a unique two-piece plastic handle
- Removes large, burnt-on areas
- Use before cleaning with pad and Cerama Bryte Cooktop Cleaner



**WX10X10206**  
**CERAMA BRYTE REFRIGERATOR CLEANER**

- Cleans grease and food spills on the interior of the refrigerator or microwave
- Great to use as a multi-surface kitchen cleaner
- Non-toxic and safe for everyday use
- 16-oz. bottle



**WX10X10210**  
**FINISH® JET-DRY® RINSE AID**

- 16-oz. bottle handles 150 washes; use with detergent
- Works with detergent to rinse away stubborn leftover food, spots, and film for sparkling dishes, glasses and utensils
- Contains glass protection ingredient for shinier and drier dishes
- Is automatically released in the rinse cycle after being added to the rinse aid dispenser

Finish is a registered trademark of Reckitt Benckiser Group.



**WX10X10209**  
**FINISH DISHWASHER CLEANER**

- 8.45-oz. bottle; recommended use: once a month
- Cleans, freshens, and helps maintain your dishwasher
- Hygienically cleans hidden grease and lime scale from filters, spray-arms, pipes and tubes
- Safe for septic systems and contains no phosphorus



**PM10X311**  
**CERAMA BRYTE STAINLESS STEEL CLEANER & POLISHER**

- Specially formulated to clean, polish and protect stainless steel appliances
- Makes it easy to remove food stains, fingerprints and water spots
- Provides a protective layer to prevent future spots and stains
- Includes mineral oil to eliminate streaks and create a beautiful shine
- 16-oz. bottle
- **Not recommended for use on Black Stainless, Slate, or Black Slate finishes**



**WX10X10004**  
**CERAMA BRYTE STAINLESS STEEL WIPES**

- Cleans, polishes and protects all stainless steel without streaking
- Removes grease spatter, fingerprints, dust and food
- 35 pre-moistened wipes in canister
- **Not recommended for use on Black Stainless, Slate, or Black Slate finishes**



**WX10X10009**  
**CITRUSHINE™ STAINLESS STEEL SPRAY**

- Cleans and protects all stainless steel without streaking
- Removes grease spatter, fingerprints, dust and food
- 12-oz. bottle
- **Not recommended for use on Black Stainless, Slate, or Black Slate finishes**

Citrushine is a trademark of Bryson Industries, Inc.



**WX10X10022**  
**FINISH HARD WATER DETERGENT BOOSTER**

- 14-oz. canister of booster crystals; lemon sparkle scent
- Can be added to pre-wash chamber or directly to bottom of dishwasher
- Supercharges detergent for crystal clear dishes
- Booster removes
  - Spots, residue and hard water film
  - Tough, bleachable stains such as tea
  - Mineral buildup in your machine
- Safe for septic systems and contains no phosphorus



**WX10X311**  
**CERAMA BRYTE DISPOSAL CLEANER**

- Removes foul odors and keeps your disposer and drains smelling fresh with a just-cleaned scent
- Cleans away food, grease and odors from your disposer and the entire drain
- Most effective at removing the cause of odors by providing superior, long-lasting cleaning
- 16-oz. bottle



**WX10X312**  
**CERAMA BRYTE WASHER CLEANER**

- Removes abrasives harmful to laundry
- Keeps machines working their best
- Safe for all models
- 16-oz. bottle, contains 4 uses

**ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT GEAPPLIANCEPARTS.COM BY USING GE PARTS ACCOUNT NUMBER.**



LIMITED WARRANTY INFORMATION

(See written warranty for complete details.)

The condensed list below is a convenient overview of the written warranties offered on various GE appliances described in this catalog for products manufactured on or after January 1, 2006. For complete warranty details on a specific GE Appliances model, contact your nearest GE Appliances supplier, or call GE Appliances Factory Service, toll-free, 800.GE.CARES (800-432-2737).

REFRIGERATORS, WINE AND BEVERAGE CENTERS, ICE MAKERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the refrigerator which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	Any part of the sealed refrigerating system (the compressor, condenser, evaporator and all connecting tubing) which fails due to a defect in materials or workmanship. During this <b>limited five-year sealed refrigerating system warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor and related service costs to replace the defective part on GE Profile™ appliances only.

REFRIGERATORS, FREEZERS, WINE AND BEVERAGE CENTERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the refrigerator which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

ICEMAKERS

For Refrigerators

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the icemaker which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

WATER FILTERS

For the period of	GE Appliances will replace
30 days From the date of the original purchase	Any part of the water filter cartridge which fails due to a defect in materials or workmanship during this <b>limited thirty-day warranty*</b> .

RANGES, COOKTOPS, WALL OVENS, WARMING DRAWERS AND HOODS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the cooking product which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

SPEEDCOOK FIVE-IN-ONE OVENS WITH ADVANTIUM® TECHNOLOGY

For the period of	GE Appliances will choose to replace or service
One year From the date of the original purchase	Any part of the oven which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related services costs to replace the defective part.
Five years (CSA1201 ONLY) From the date of the original purchase	The magnetron tube, if the magnetron tube fails due to a defect in the materials or workmanship. During this <b>five-year limited warranty</b> , you will be responsible for any labor or in-home service costs.

OVER-THE RANGE AND COUNTERTOP MICROWAVES

For the period of	GE Appliances will choose to replace or service
One year From the date of the original purchase	In the event of service, GE Appliances will provide any part of the microwave which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor and related service costs to replace the defective part when the unit is serviced.

DISHWASHERS AND COMPACTORS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the dishwasher or compactor which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

DISPOSERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Models GFC320 and GFC325: The entire disposer if there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>limited one-year warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor charges related to replacing the original disposer along with the replacement disposer within the first year.
Additional one year From the date of the original purchase	Models GFC520V, GFC525V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>one-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Additional two years From the date of the original purchase	Models GFC530V, GFC535V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>two-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Additional four years From the date of the original purchase	Models GFC720V, GFB760V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>four-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Additional six years From the date of the original purchase	Model GFC1020V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>six-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.

\*If your GE Appliances part fails because of a manufacturing defect within thirty days from the date of original purchase for use, we will give you a new or, at our option, a rebuilt part without charge. Return the defective part to the parts supplier from whom it was purchased together with a copy of the "proof of purchase" for the part. If the part is defective and shows no signs of abuse, it will be exchanged. The warranty does not cover the failure of parts which are damaged while in your possession, are abused, or have been installed improperly. It does not cover the cost of returning the part to the supplier from whom it was purchased nor does it cover the cost of labor to remove or install it to diagnose the fault. It does not cover parts used in products in commercial use except in the case of air conditioning equipment. In no event shall GE Appliances be liable for consequential damages. Warrantor: GE Appliances

GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

ELECTRIC WATER HEATER

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the Water Heater which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will reimburse registered service providers, or will reimburse consumers for documented out of pocket costs for parts and/or labor for professional service at a predetermined rate as found on the GE Appliances Website <a href="http://GEAppliances.com/waterheater">GEAppliances.com/waterheater</a> , unless service provided to replace defective parts is determined to be a result of improper installation or maintenance.
Second through Eighth, Tenth or Twelfth Year From the date of the original purchase	Any part of the Water Heater which fails due to a defect in materials or workmanship. During this <b>limited second through the end of the warranty period</b> , labor and related service to replace the defective part are not included.  <small>*Warranty is based on the 6th and 7th digit of model number located on rating plate (e.g.: GE50T08BAM has a part warranty of 8 years).</small>

SOLAR WATER HEATER

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the Water Heater which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will reimburse registered service providers, or will reimburse consumers for documented out-of-pocket costs for parts and/or labor for professional service at a predetermined rate as found on the GE Appliances Website <a href="http://GEAppliances.com/waterheater">GEAppliances.com/waterheater</a> , unless service provided to replace defective parts is determined to be a result of improper installation or maintenance.
Second through Fifth Year From the date of the original purchase	Any part in the Water Heater which fails due to a defect in materials or workmanship. During this <b>limited second through year five warranty period</b> , labor and related service to replace the defective part are not included.
Sixth through Tenth Year From the date of the original purchase	50% of the cost of any part, of the water heater which fails due to defect in materials or workmanship. During this <b>sixth through the end of the warranty period</b> , labor and related service to replace the defective part are not included.  <small>Warranty is based on the 6th and 7th digit of model number located on rating plate (e.g.: GE50T10BAM has a part warranty of 10 years).</small>

WATER SOFTENERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the Water Softening System which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Second through third year From the date of the original purchase	Electronic Monitor, if the Electronic Monitor fails due to a defect in materials or workmanship. During this <b>additional two-year limited warranty</b> , you will be responsible for any labor and related service costs.
Second through tenth year From the date of the original purchase	Cabinet (Brine Tank) and Resin Tank, if either of these parts fail due to a defect in materials or workmanship. During this <b>additional nine-year limited warranty</b> , you will be responsible for any labor and related service costs.

WASHERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the washer which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Ten years From the date of the original purchase	Models GFW850, GTW840/845, GTW720/725, GTW680/685, GFW650, GFW550 and GFW510: The motor, if it should fail due to a defect in materials or workmanship. During this <b>additional nine-year limited warranty</b> , you will be responsible for any labor and related service costs.

DRYERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the dryer which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

REVERSE OSMOSIS FILTRATION SYSTEMS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the Reverse Osmosis Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

DUAL-STAGE AND SINGLE-STAGE WATER FILTRATION AND WHOLE HOUSE FILTRATION

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the Water Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

DUAL-STAGE AND SINGLE-STAGE WATER FILTRATION AND WHOLE HOUSE FILTRATION

All GE models starting with GX

For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the Water Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , you will be responsible for any labor and related service costs.

DUAL-STAGE AND SINGLE-STAGE WATER FILTRATION AND WHOLE HOUSE FILTRATION

GE models: UNFCTFBL, UCRING, UCWRENCH, HHRING & HHWRNCH

For the period of	GE Appliances will replace
30 days From the date of the original purchase	Any part of the water filtration accessory that fails due to a defect in materials or workmanship. During this <b>limited 30-day warranty</b> , you will be responsible for any labor and related service costs.

AIR CONDITIONERS

Window

For the period of	GE Appliances will replace
One year From the date of the original purchase	Replacement, repair, or refund of the original retail price for any product which fails due to a defect in materials or workmanship. If the unit is exchanged, the replacement unit is warranted for the remainder of your product's original <b>one-year warranty</b> period. GE Appliances will, at its sole discretion, replace the product with a product of the same or comparable functionality and quality or refund the original retail price.

DEHUMIDIFIERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	During this <b>limited one-year warranty</b> , GE Appliances will <b>replace the dehumidifier</b> if there is a defect in materials or workmanship.

(continued on next page)



LIMITED WARRANTY INFORMATION (continued)  
(See written warranty for complete details.)

KITCHEN HUB	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the cooking product which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

AIR CONDITIONERS	
Built-in	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part in the air conditioner which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	<b>Sealed Refrigerating System</b> , if the Sealed Refrigerating System (compressor, condenser, evaporator and all connecting tubing) should fail due to a defect in materials or workmanship. During this <b>limited five-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

AIR CONDITIONERS	
Zonline® and Vertical Zonline	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the air conditioner which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	<b>Sealed Refrigerating System</b> , if any part of the Makeup Air Module or Sealed Refrigerating System (the compressor, condenser, evaporator, and all connecting tubing) should fail due to a defect in materials or workmanship. During this <b>limited five-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Second through fifth year (Zonline only) From the date of the original purchase	<b>Fan Motors, Switches, Thermostat, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, Freeze Sentinel, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing</b> , if any of these parts should fail due to a defect in materials or workmanship. During this <b>additional four-year limited warranty</b> , the customer will be responsible for any labor and related service costs.
Second through fifth year (vertical Zonline only) From the date of the original purchase	<b>Fan Motors, Switches, Thermostat, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, Freeze Sentinel</b> , if any of these parts should fail due to a defect in materials or workmanship. During this <b>additional four-year limited warranty</b> , the customer will be responsible for any labor and related service costs.

FOR EACH PRODUCT LISTED
What GE Appliances will not cover:
■ Service trips to your home to teach you how to use the product. ■ Improper installation. ■ Replacement of house fuses or resetting of circuit breakers. ■ Failure of the product if it is abused, misused or used for anything other than the intended purpose or used commercially. ■ Damage to product caused by accident, fire, floods or acts of God. ■ Incidental or consequential damage caused by possible defects with this appliance.

AIR CONDITIONERS	
Through-the-Wall	
For the period of	GE Appliances will replace
Two year From the date of the original purchase	Any part in the air conditioner which fails due to a defect in materials or workmanship. During this <b>limited two-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	<b>Sealed Refrigerating System</b> , if the Sealed Refrigerating System (compressor, condenser, evaporator and all connecting tubing) should fail due to a defect in materials or workmanship. During this <b>limited five-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

PORTABLE AIR CONDITIONER UNITS	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Replacement, repair or refund of the <b>original retail price</b> for any product which fails due to a <b>defect in materials or workmanship</b> . If the unit is exchanged, the replacement unit is <b>warranted for the remainder of your product's original one-year warranty</b> period. GE will, at its sole discretion, replace the product with a product of the same or comparable functionality and quality or refund the <b>original retail price</b> .

PARTS AND ACCESSORIES	
For the period of	GE Appliances will replace
One year From the date of the original purchase	If your GE Appliances part fails because of a manufacturing defect within <b>one year from the date of original purchase</b> , we will provide a new or, at our option, rebuilt part without charge. Return the defective part to the vendor from whom it was purchased with a copy of the “proof of purchase.” If the part is defective it will be exchanged. This warranty does not cover parts which are improperly installed, damaged, abused or used for other than the intended purpose. It does not include cost of returning the part to the vendor from which it was purchased, labor to remove, install or diagnose the failure, parts used in commercial applications, incidental or consequential damage caused by possible defects with the parts.  Excludes water filters which offer 30-day warranty.

<b>EXCLUSION OF IMPLIED WARRANTIES</b> - Your sole and exclusive remedy is product repair as provided in this Limited Warranty. Any implied warranties, including the implied warranties of merchantability or fitness for a particular purpose, are limited to one year or the shortest period allowed by law.
---

This warranty is extended to the original purchaser and any succeeding owner for products purchased for home use within the USA. In Alaska, the One-Year Warranty excludes the cost of shipping, or service calls to your home. Some states do not allow the exclusion or limitation of incidental or consequential damages. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. To know what your legal rights are, consult your local or state consumer affairs office or your state's Attorney General.

ACCESSIBILITY REQUIREMENTS

REFRIGERATORS/FREEZERS	
Uniform Federal Accessibility Standards (UFAS)	
TOP-FREEZERS AND SIDE-BY-SIDES	
Regulation #/ Description:	
<b>4.2.6* Side Reach</b> —If the clear floor space allows parallel approach by a person in a wheelchair, the maximum high side reach allowed shall be 54” (1370mm) and the low side reach shall be no less than 9” (230mm) above the floor.	
<b>4.27.4 Operation</b> —Controls and operating mechanisms shall be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no greater than 5lbf (222N).	
<b>4.34.6.8* Refrigerators/Freezers</b> —Refrigerator/freezers shall comply with 4.34.6.3. Provision shall be made for refrigerators which are: (1) Of the vertical side-by-side refrigerator/freezer type; OR (2) Of the over-and-under type and meet the following requirements: (a) Have at least 50 percent of the freezer space below 54” (1370mm) above the floor. (b) Have 100 percent of the refrigerator space and controls below 54” (1370mm).	

Americans with Disabilities Act (ADA)/ANSI Standard Requirements	
TOP-FREEZERS AND FRENCH-DOOR BOTTOM-FREEZERS WITH EXTERNAL DISPENSER CONTROLS	
Regulation #/ Description:	
<b>804.6.2 &amp; 804.6.6</b> —Operable parts shall be operable with one hand shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate operable parts shall be 5lbf max.	
<b>309.4 EXCEPTION:</b> Appliance door and door latching devices do not need to comply with requirement. <b>804.6.2.</b> Refrigerators/freezers shall have at least 50 percent of the freezer space 54” (1370 mm) max. above the floor. The clear floor or ground space shall be positioned for a parallel approach to the space dedicated to a refrigerator/freezer with the centerline of the clear floor or ground space offset 24” (610 mm) maximum from the centerline of the dedicated space. Preference for side-by-side and top-mount eliminated; bottom-mount now acceptable <b>804.6.6.</b>	

The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.

WALL OVENS	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
<b>4.34.6.7</b> —ovens shall have controls on front panels; they may be located on either side of the door.	

SLIDE-IN/DROP-IN RANGES	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

ELECTRIC COOKTOPS	
FRONT CONTROL	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	

<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
GAS COOKTOPS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
FREE-STANDING RANGES	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
MICROWAVES	
BUILT-IN CONFIGURATION	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
DISHWASHERS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
<b>4.34.6.9</b> —all rack space shall be accessible from the front of the machine for loading and unloading dishes.	
LAUNDRY	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	
<b>4.34.7.2</b> —washing machines and clothes dryers shall be front loading.	
<b>611.4* Height</b> —Top loading machines shall have the door to the laundry compartment located 36 inches (915 mm) maximum above the finish floor. Front loading machines shall have the bottom of the opening to the laundry compartment located 15 inches (380 mm) minimum and 36 inches (915 mm) maximum above the finish floor.	
ROOM AIR CONDITIONERS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48”, minimum low forward reach is 15”.	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.	

GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.




COUNTER-DEPTH FRENCH-DOOR REFRIGERATORS

	GE PROFILE™				GE				
	PYE22PYN	PYD22KBL PYD22KYN	PYE22KBL PYE22KYN PYE22KMK PYE22KEL	PWE23KYN PWE23KMK PWE23KEL	GYE22GYN GYE22GMN GYE22GEN		GWE23GYN GWE23GMN GWE23GEN	GWE19JSL GWE19JML GWE19JGL	GYE18JBL GYE18JSL GYE18JML GYE18JEM
ENERGY STAR® certified	●		●	●	●		●	●	●
WiFi Connect	Built-in	Optional††	Optional††	Optional††	Optional		Optional	Optional††	Optional††
Sabbath mode capable	●	●	●	●	●		●	●	●
ADA compliant	●	●	●		●				●
CAPACITY									
Total (cu. ft.)	22.1	22.1	22.1	23.1	22.1		23.1	18.6	17.5
Fresh food (cu. ft.)	14.92	14.89	14.92	15.93	14.92		15.93	13.59	12.5
Freezer (cu. ft.)	7.16	7.18	7.16	7.16	7.16		7.16	5.01	5.01
FRESH-FOOD FEATURES									
Door in Door		●							
TwinChill™ evaporators	●	●	●	●	●		●		
External controls with temperature display and child lock	●	●	●						●
Door alarm	●	●	●	●	●		●	●	●
Turbo Cool setting	●	●	●		●				●
Cabinet shelves	5 glass	5 glass	5 glass	5 glass	6 glass		5 glass	5 glass	5 glass
Adjustable	4 split	4 split	4 split	4 split	5 split		4 split	4	4
Full-width	1	1	1	1	1		1	1	1
Spillproof	3	3	3	3	4		4		
Quick Space shelf	●	●	●	●				●	●
External dispenser	Ice & water	Ice & water	Ice & water		Ice & water				Ice & water
Keurig® K-Cup® brewing system	●								
Hot water	●								
Hands-free Autofill		●	●						
Internal water dispenser				●				●	
Advanced filtration system	RPWFE	RPWFE	RPWFE	RPWFE	RPWFE		RPWFE	XWFE	XWFE
Water filter indicator light	●	●	●	●	●		●	●	●
Humidity-controlled drawers	2	2	2	2			2	2	2
Full-width drawer	Electronic w/color LED lighting	Electronic w/color LED lighting	Electronic w/color LED lighting	Electronic w/color LED lighting			Electronic with LED lighting	●	●
Fresh-food door bins	6 (3 w/gallon storage, 2 adj.)	6 (1 rotating)	6 (3 w/gallon storage, 2 adj.)	6 (4 adj. with gallon storage)	6 (2 w/gallon storage, 2 adj.)		6 (4 adj. with gallon storage)	8 (6 adjustable, 2 fixed)	7 (3 adjustable, 4 fixed)
Drop-down tray	●		●	●					
Dairy compartment	●		●	●			●		
Showcase LED lighting	7 + colored full-width drawer	Full-width drawer	7 + colored full-width drawer	7 + colored full-width drawer			7 + full-width drawer	●	●
FREEZER FEATURES									
Space-saving icemaker	●	●	●		●				
Factory-installed icemaker & bin		Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	●			●	●	
Turbo Freeze setting	●	●	●		●				
Frost Guard technology	●	●	●	●			●	●	●
Full-width, full-extension plastic freezer bins	2 + door bin	2 + door bin	2 + door bin	2 + door bin	2		2	2 full-width, full-extension plastic baskets	2 full-width, full-extension plastic baskets
Showcase LED lighting	2	2	2	2	2		2	●	●
EXTERIOR									
Color(s) available*	FS	TS / FS	TS / FS / ES / DS	FS / ES / DS	FS / ES / DS		FS / ES / DS	SS / ES / WW, BB	SS / ES / DS / TS
			Fingerprint Resistant Stainless Slate Black Slate Black Stainless	Fingerprint Resistant Stainless Stainless with chrome Black Stainless	Fingerprint Resistant Stainless Slate Black Slate		Fingerprint Resistant Stainless Slate Black Slate	Stainless Stainless Color-matched Designer-style Contoured	Stainless with chrome Stainless with chrome Black Stainless Black Slate Designer-style Contoured
Handle color	Fingerprint Resistant Stainless	Black Stainless Fingerprint Resistant Stainless							
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style		Designer-style	Designer-style	Designer-style
Door design	Contoured	Contoured	Contoured	Contoured	Contoured		Contoured		
								Case only (dark gray) Case only (dark gray) Case only (color-matched)	
Textured steel case color	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)		Case only (dark gray)		Case only (dark gray)
			Black Stainless Fingerprint Resistant Stainless Slate Black Slate	Fingerprint Resistant Stainless Slate Black Slate	Fingerprint Resistant Stainless Stainless Steel Appearance		Fingerprint Resistant Stainless Slate Black Slate	Stainless Steel Appearance	Black Stainless Stainless Slate Black Slate
Door	Fingerprint Resistant Stainless	Black Stainless Fingerprint Resistant Stainless							
Door stops	●	●	●	●	●		●	●	●
Adjustable rollers	2	2	2	2	2		2	2	2
WEIGHTS & DIMENSIONS									
Height to top of door (in.) A	70-1/2	70-1/2	70-1/2	70-1/2	70-1/2		70-1/2	69-7/8	69-7/8
Height to top of hinge (in.) B	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8		69-7/8	69-3/4	69-3/4
Height to top of case (in.) C	69	69	69	69	69		69	68-5/8	68-5/8
Case depth without door (in.) D†	24-3/8	24-3/8	24-3/8	24-3/8	24-3/8		24-3/8	24-1/8	24-1/8
Case depth less door handle (in.) E†	29-3/4	29-3/4	29-3/4	28-3/4	29-3/4		28-3/4	29	29
Case depth with door handle (in.) F†	31-1/4	31-1/4	31-1/4	31-1/4	31-1/4		31-1/4	31	31
Depth w/fresh-food door open 90° (in.) G†	43-3/8	43-3/8	43-3/8	43-3/8	43-3/8		43-3/8	42	42
Width (in.) H	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4		35-3/4	32-3/4	32-3/4
Width w/door open 90° w/door handle (in.) I	44-5/8	48-3/4	44-5/8	44-5/8	44-5/8		44-5/8	40-1/2	40-1/2
Each side (in.)	1/8	0-1/8	1/8	1/8	1/8		1/8	1/8	1/8
Top (in.)	1	1	1	1	1		1	1	1
Air clearances Back (in.)	2	2	2	2	2		2	2	2
Approximate shipping wt. (lbs.)	363	383	363	363	390		375	252	274
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps		120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White, B = Black.  
\*\*Includes hot water knob.  
†Water hookup fits in back air clearance when calculating installation depth.  
††SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

FRENCH-DOOR REFRIGERATORS DIMENSIONS

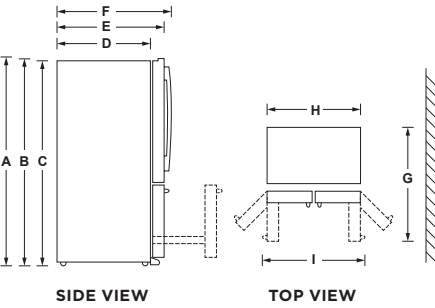

**IMPORTANT:** Before finalizing specifications for your counter-depth refrigerator, please NOTE:

- A minimum width of 36” is required for refrigerator installation
- Be sure to allow for 1/2” or 3/4” side panels in addition to the 36” minimum




SEE PAGE 233 FOR INSTALLATION INFORMATION.



FRENCH-DOOR REFRIGERATORS

	GE PROFILE™				GE		
	PVD28BYN	PFE28PYN	PFD28KBL PFD28KYN	PFE28KYN	GFD28GYN GFD28GML GFD28GEL	GFE28GYN GFE28GMK GFE28GEL	GNE29GYN GNE29GMN GNE29GEN
ENERGY STAR® certified	●	●		●		●	●
WiFi Connect	●	●	Optional††	Optional††	Optional††	Optional††	Optional††
Sabbath mode capable	●	●	●	●	●	●	●
ADA compliant		●	●	●	●	●	
CAPACITY							
Total (cu. ft.)	27.9	27.7	27.7	27.7	27.7	27.7	28.7
Fresh food (cu. ft.)	19.33	18.50	18.50	18.50	18.48	18.48	19.57
Freezer (cu. ft.)	8.57	9.17	9.17	9.17	9.17	9.17	9.17
FRESH-FOOD FEATURES							
Door in Door	●		●		●		
TwinChill™ evaporators	●	●	●	●	●	●	●
External controls with temperature display and child lock		●	●	●	●	●	
Door alarm	●	●	●	●	●	●	●
Turbo Cool setting	●	●	●	●	●	●	
Cabinet shelves	4 glass	5 glass	5 glass	5 glass	5 glass	5 glass	5 glass
Adjustable	2	4 split	4 split	4 split	4 split	4 split	4 split
Full-width	1	1	1	1	1	1	1
Spillproof		3	3	3	3	4	4
Quick Space shelf	1	●	●	●	●		
External dispenser	Ice & water	Ice & water	Ice & water	Ice & water	Ice & water	Ice & water	
Keurig® K-Cup® brewing system		●					
Hot water		●					
Hands-free Autofill			●	●			
Precise Fill							●
Adjustable-humidity drawers	2	2	2	2	2	2	2
Full-width drawer		Electronic with color LED lighting	Electronic with color LED lighting	Electronic with color LED lighting	●	●	Electronic with LED lighting
Fresh-food door bins	6 (3 with gallon storage, 2 adj.)	6 (3 with gallon storage, 2 adj.)	6 (1 rotating)	6 (3 with gallon storage, 2 adj.)	6 (1 rotating)	6 (3 with gallon storage, 2 adj.)	6 (4 adj. with gallon storage)
Drop-down tray		●		●			
Dairy compartment	●						●
Showcase LED lighting		7 + colored full-width drawer	7 + colored full-width drawer	7 + colored full-width drawer	5	5	7 + full-width drawer
FREEZER FEATURES							
Space-saving icemaker	●	●	●	●	●	●	
Factory-installed icemaker & bin			Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	●
Turbo Freeze setting	●	●	●	●	●	●	
Frost Guard technology	●	●	●	●	●	●	●
Full-width, full-extension plastic freezer bins	2	2 + door bin	2 + door bin	2 + door bin			2
Showcase LED lighting	●	2	2	2	2	2	2
EXTERIOR							
Color(s) available*	FS	FS	TS / FS	FS	FS / ES / DS	FS / ES / DS	FS / ES / DS
Handle color	Stainless w/Chrome	Fingerprint Resistant Stainless	Black Stainless Fingerprint Resistant Stainless	Fingerprint Resistant Stainless	Fingerprint Resistant Stainless	Fingerprint Resistant Stainless with chrome Black Stainless	Fingerprint Resistant Stainless Slate
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Door design	Contoured	Contoured	Contoured	Contoured	Contoured	Contoured	Contoured
Textured steel case color	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)
Door stops	●	●	●	●	●	●	●
Adjustable rollers	2	2	2	2	2	2	2
WEIGHTS & DIMENSIONS							
Height to top of door (in.) A	69-7/8	70-1/2	70-1/2	70-1/2	70-1/2	70-1/2	70-1/2
Height to top of hinge (in.) B	69-3/4	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8
Height to top of case (in.) C	68-5/8	69	69	69	69	69	69
Case depth without door (in.) D†	29	29-3/8	29-3/8	29-3/8	29-3/8	29-3/8	29-3/8
Case depth less door handle (in.) E†	34-1/4	34-3/4	34-3/4	34-3/4	34-3/4	34-3/4	34-3/4
Case depth with door handle (in.) E†	36-3/4	36-1/4	36-1/4	36-1/4	36-1/4	36-1/4	36-1/4
Depth w/fresh-food door open 90° (in.) G†	48-3/8	35-5/8	48-3/8	48-3/8	48-3/8	48-3/8	48-3/8
Width (in.) H	35-5/8	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4
Width w/door open 90° with door handle (in.) I	44-7/8	48-3/4	44-5/8	44-5/8	44-5/8	44-5/8	44-5/8
Air clearances	Each side (in.)	1/8	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1	1	1
Back (in.)	2	2	2	2	2	2	2
Approximate shipping wt. (lbs.)	410	390	410	390	403	390	375
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate.  
\*\*Includes hot water knob.  
†Water hookup fits in back air clearance when calculating installation depth.  
††SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

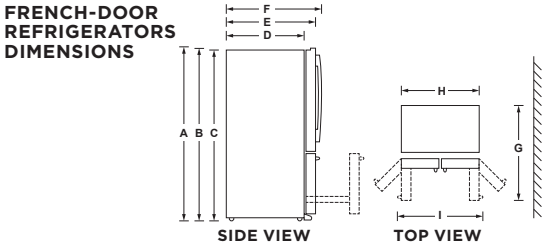


SEE PAGE 233 FOR INSTALLATION INFORMATION.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

	GE					
	GFE26JGM GFE26JBM GFE26JYM GFE26JMM GFE26JEM	GNE27JYM GNE27JMM GNE27JGM	GNE27EYM	GFE24JBL GFE24JSK GFE24JMK GFE24JGK	GNE25JSK GNE25JMK GNE25JGK	GNE21FSK GNE21FMK
ENERGY STAR certified	●	●	●	●	●	●
French-Door model	●	●	●	●	●	●
Sabbath mode capable	●	●	●	●	●	●
WiFi Connect	Optional†	Optional†	Optional†	Optional†	Optional†	Optional†
ADA compliant	●			●		
CAPACITY						
Total (cu. ft.)	25.6	27	27	23.7	24.7	20.8
Fresh food (cu. ft.)	17.45	18.81	18.81	16.46	17.44	14.76
Freezer (cu. ft.)	8.18	8.18	8.18	7.28	7.28	6.04
FRESH-FOOD FEATURES						
External controls with child lock	●			●		
Door alarm	●	●	●	●	●	●
Upfront temperature controls		●	●		●	●
Turbo Cool setting	●	●	●	●	●	●
Spillproof cabinet shelves	5 glass	5 glass	4 glass	5 glass	5 glass	3 glass
Adjustable	4 split	4 split	4 split	4	4	2
Full-width	1	1	1	1	1	3
Quick Space shelf	●	●		●	●	
External dispenser	Ice & water			Ice & water		
Internal water dispenser		●			●	
In-the-door ice system	●					
Advanced filtration system	XWFE	XWFE	XWFE	XWFE	XWFE	XWFE
Water filter indicator light				●	●	●
Multi-level drawers				●	●	●
Full-width drawer	●	●		●	●	●
Humidity-controlled drawers	2	2	2	2	2	2
Fresh-food door bins	7 (3 adjustable with gallon storage)	8 (6 adjustable with gallon storage)	6 adjustable	7 (3 adjustable, 4 fixed)	8 (6 adjustable, 2 fixed)	8 (6 adjustable, 2 fixed)
LED lighting	●	●	●	●	●	●
FREEZER FEATURES						
Factory-installed icemaker		●	●		●	●
Frost Guard technology	●	●	●	●	●	●
Freezer storage basket(s)	2 full-width, full-extension plastic	2 full-width, full-extension with ice bin	2 full-width, full-extension with ice bin	2 full-width, full-extension plastic	2 full-width, full-extension with ice bin	2 full-width, full-extension with ice bin
LED lighting	●	●	●	●	●	●
EXTERIOR						
Color(s) available*	TS SS ES DS WW, BB	SS ES WW, BB	SS	TS SS ES WW, BB	SS ES WW, BB	SS ES
Handle color	Black Stainless Stainless Black Stainless White, Black	Stainless Stainless Color-matched	Stainless	Black Stainless Stainless Stainless Color-matched	Stainless Stainless Color-matched	Stainless Slate
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Field-installed handles	●	●	●	●	●	●
Door design	Contoured	Contoured	Contoured	Contoured	Contoured	Contoured
Textured steel case	White, Black Case only (dk. gray)	Case only (dk. gray)	Case only (dk. gray) Case only (color-matched)	Case only (dk. gray) Case only (color-matched)	Case only (dk. gray) Case only (color-matched)	Case only (dk. gray)
Door	Black Stainless Stainless Slate Black Slate White, Black	Stainless Slate High-gloss	Stainless	Black Stainless Stainless Slate High-gloss	Stainless Slate High-gloss	Stainless Slate
Door stops	●	●	●	●	●	●
Adjustable leveling legs	Front	Front	Front	Front	Front	Front
WEIGHTS & DIMENSIONS						
Height to top of door (in.) A	69-7/8	69-7/8	69-7/8	69-7/8	68-7/8	69-7/8
Height to top of hinge (in.) B	69-3/4	69-3/4	69-3/4	69-3/4	69-3/4	69-3/4
Height to top of case (in.) C	68-5/8	68-5/8	68-5/8	68-5/8	68-5/8	68-5/8
Case depth without door (in.) D†	29-1/2	29-1/2	29-1/2	30-5/8	30-5/8	29-3/4
Case depth less door handle (in.) E†	33-7/8	33-7/8	33-7/8	35	35	34-1/8
Case depth with door handle (in.) F†	36-3/8	36-3/8	36-3/8	37-1/2	37-1/2	36-5/8
Depth with fresh-food door open 90°(in.) G†	48-3/4	48-3/4	48-3/4	47-3/4	47-3/4	46-1/8
Width (in.) H	35-5/8	35-5/8	35-5/8	32-3/4	33	29-3/4
Width w/door open 90° with door handle (in.) I	43-3/4	43-3/4	43-3/4	40-7/8	40-7/8	37-7/8
Each side (in.)	1/8	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1	1
Air clearances	Back (in.)	2	2	2	2	2
Approximate shipping wt. (lbs.)	303	332	332	302	275	232
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White, BB = Black.  
†SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.

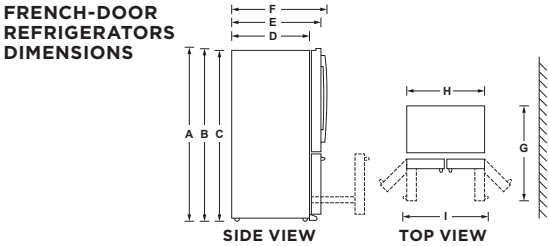

SEE PAGE 233 FOR INSTALLATION INFORMATION.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




BOTTOM-FREEZER REFRIGERATORS

	GE			
	GDE25ESK	GDE21ESK GDE21EMK GDE21EGK	GBE21DSK GBE21DGK	GLE12HSP
ENERGY STAR® certified	●	●	●	●
Sabbath mode capable	●	●		●
WiFi Connect	Optional†	Optional†	Optional†	
CAPACITY				
Total (cu. ft.)	24.8	21.0	21.0	11.9
Fresh food (cu. ft.)	17.55	14.93	14.92	7.71
Freezer (cu. ft.)	7.28	6.04	6.04	4.19
FRESH-FOOD FEATURES				
External controls with child lock				●
Door alarm	●	●		
Upfront temperature controls	●	●		Internal
Turbo Cool setting	●	●		
Cabinet shelves	3 glass	3 glass	3 glass	3 glass
Adjustable				1
Full-width	3 (2 adjustable)	3 (2 adjustable)	3 (2 adjustable)	3
GE water filtration	XWFE	XWFE		
Water filter indicator light	●	●		
Full-width drawer				●
Crisper drawers	2 humidity-controlled	2 humidity-controlled	2 humidity-controlled	1 TempSelect Zone
Sliding snack drawer	Clear	Clear		
	4 clear (2 adj., 2 full-width fixed)	4 clear (2 adj., 2 full-width fixed)	4 clear (2 adj., 2 full-width fixed)	3 full-width
Clear Look door bins				●
LED lighting	●	●	●	●
Bottle storage rack				●
FREEZER FEATURES				
Factory-installed icemaker	●	●	Opt. (IM4D)	Opt. (IM4D)
Frost Guard technology	●	●	●	●
	2 full-width, full-extension with ice bin	2 full-width, full-extension with ice bin	1 full-width	2 drawers
Freezer storage basket(s)			1 full-width	2-level system; drawer divider & pan
Wire compartment shelves			1 full-width	
LED lighting	●	●	●	●
EXTERIOR				
		SS ES WW/BB	SS WW/BB	SS
Color(s) available*	SS			●
Counter-depth configuration				
		Stainless Stainless	Stainless	Stainless
Handle color	Stainless	Color-matched	Color-matched	Recessed
Handle design	Designer-style	Designer-style	Designer-style	
Field-installed handles	●	●	●	
Door design	Contoured	Contoured	Contoured	Contoured
		Case only (dk. gray) Case only (dk. gray)	Case only (dk. gray)	
		Case only (color-matched)	Case only (color-matched)	
Textured steel case	Case only (dk. gray)			Dark gray
		Stainless Slate	Stainless High-gloss	Stainless
Door	Stainless	High-gloss		
Door stops	●	●	●	●
Reversible doors	●	●	●	●
Right or Left door opening	●	●	●/●	●
Adjustable leveling legs	Front	Front	Front	●
WEIGHTS & DIMENSIONS				
Height to top of door (in.) A	69-7/8	69-7/8	69-7/8	70
Height to top of hinge (in.) B	69-3/4	69-3/4	69-3/4	70
Height to top of case (in.) C	68-5/8	68-5/8	68-5/8	69-7/8
Case depth without door (in.) D†	30-5/8	29-3/4	29-3/4	23-1/2
Case depth less door handle (in.) E†	35	34-1/8	34-1/8	26-1/2
Case depth with door handle (in.) F†	37-1/2	36-5/8	36-5/8	26-1/2
Depth with fresh-food door open 90° (in.) G†	65-1/8	61-1/4	61-1/4	47-3/8
Width (in.) H	32-3/4	29-3/4	29-3/4	23-1/2
Width w/door open 90° with door handle (in.) I	36-7/8	33-7/8	33-7/8	24-7/8
Each side (in.)	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1
Air clearances Back (in.)	2	2	2	1
Approximate shipping wt. (lbs.)	275	232	232	192
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, ES = Slate, WW = White, BB = Black.  
†SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.

BOTTOM-FREEZER REFRIGERATORS DIMENSIONS



SEE PAGE 233 FOR INSTALLATION INFORMATION.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


BOTTOM-FREEZER INSTALLATION INFORMATION & SPECIFICATIONS

ROUGH-IN DIMENSIONS


STANDARD, NEW CONSTRUCTION AND REPLACEMENT INSTALLATION

Installation tips to maximize the built-in look

- All wall/floor molding should be removed prior to installation.
- Water recess on rear wall recommended to prevent water line damage. 48" minimum length, 1/4"-diameter water line tubing recommended.
- When possible, recess both copper/pex water line and electrical outlet (see local codes).
- Front and rear leveling legs are adjustable for the built-in look (see owner's manual).


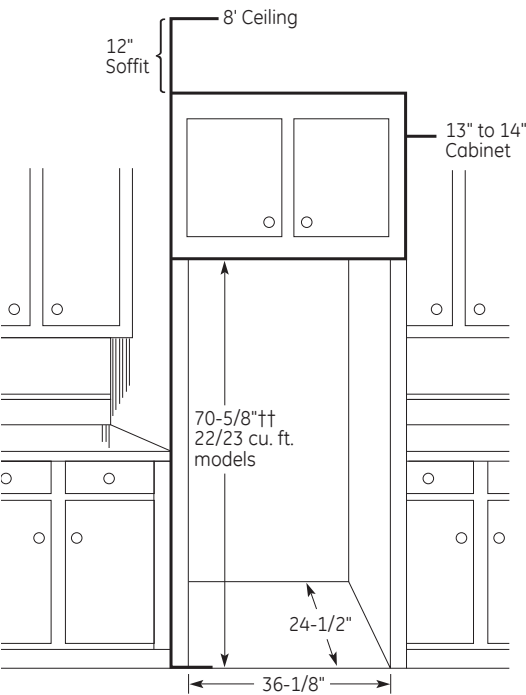


††The rough-in dimension of 70-5/8" is measured from the finished floor to top of opening (or the underside of overhead cabinets).

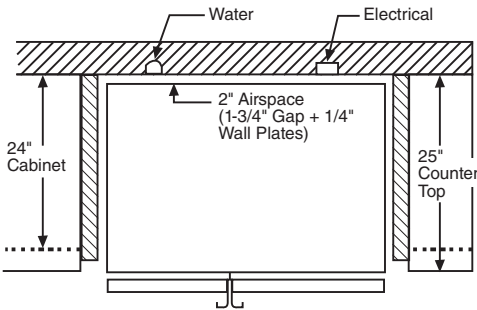

INSTALLATION OF WATER OUTLETS

FOR ALL FRENCH-DOOR, BOTTOM-FREEZER & SIDE-BY-SIDE MODELS

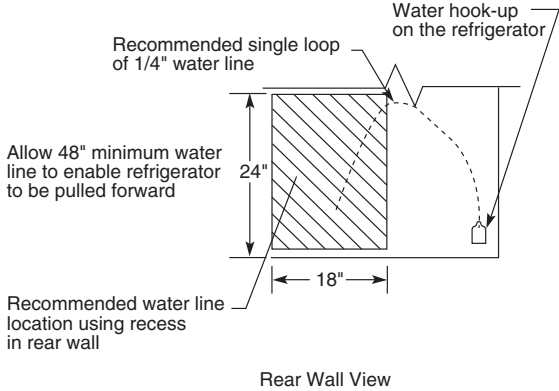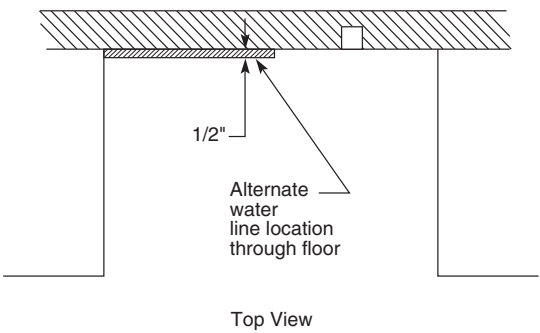

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




BUILT-IN SIDE-BY-SIDE REFRIGERATORS

	GE PROFILE™
	PSB48YSN PSB42YSN
Stainless model	●
WiFi Connect	●
UFAS compliant	●
CAPACITY	
Total (cu. ft.)	28.7/25.5
Fresh food (cu. ft.)	17.17/15.82
Freezer (cu. ft.)	11.52/8.65
FRESH-FOOD FEATURES	
Multi-flow air system	●
Digital temperature display	●
Electronic sensors	●
Dispenser	●
Light	●
Door alarm	●
Turbo Cool setting	● (in app)
GE water filtration system	MWFP
Water filter indicator light	●
Cabinet shelves	4 (3 adjustable)
Adjustable	3
Spillproof	4
Drawer system	
Top drawer	Snack
Middle drawer	Sealed
Bottom drawer	Climate controlled
Clear Look door bins	5
LED lighting	●
Never Clean condenser	●
FREEZER FEATURES	
Turbo Freeze setting	● (in app)
Factory-installed icemaker & bin	●
Drawer/Basket	2
Wire cabinet shelves	4 adj.
Door bins	3
LED lighting	●
EXTERIOR	
Color(s) available*	SS
Handle color	Stainless
Door hinge	Hidden
Adjustable rollers	2
WEIGHTS & DIMENSIONS	
Height to top of hinge (in.) A	84
Height to top of case (in.) B	83-1/2
Case depth without door (in.) C	23-1/2
Case depth less door handle (in.) D	25-3/4
Case depth with door handle (in.) E	28-3/8
Depth with fresh-food door open 90° (in.) F	52-3/8
door open 90° (in.) F	50-1/4
Width (in.) G	48
42	
Width with door open 90° incl. door handle (in.) H	53-7/8
48-1/4	
Approx. shipping wt. (lbs.)	775/725
Power/Rating	115V, 60Hz, 20Amps


\*Color(s) available: SS = Stainless.  
\*\*SmartHQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](#), part number PBX23W00YO.  
If installed against a wall, allow clearance of 4" on freezer side to remove fresh-food full-size pan without disassembling is 4".  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

BUILT-IN SIDE-BY-SIDE REFRIGERATORS DIMENSIONS

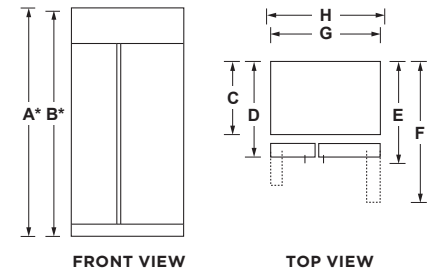

\*Shipping height. Use leveling legs and wheels for maximum 1" height adjustments from shipping height.

INSTALLATION SPACE

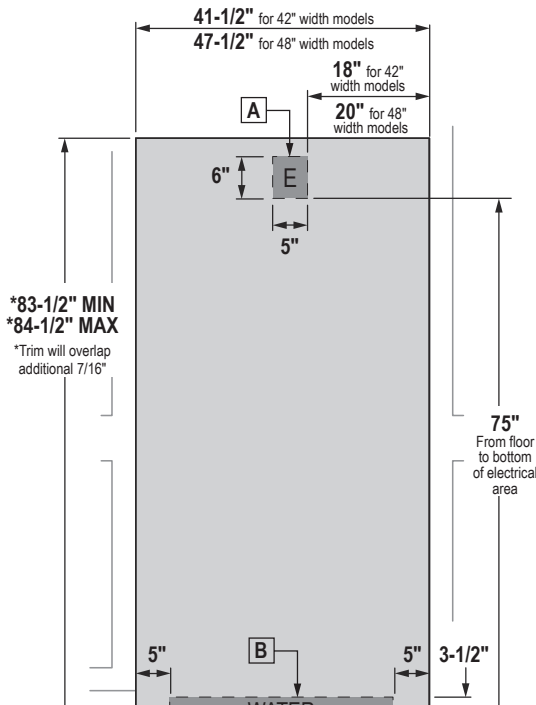

A - Mounting the junction box in this location will also allow for front accessibility through access panel.

B - Water supply area.

**WARNING!** The refrigerator is top-heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in serious injury or death.

The information provided is for cabinet design only. When installing the anti-tip system, you must use the product installation instructions.

See installation instructions for detailed instructions.

SEE PAGE 233 FOR WATER OUTLET INSTALLATION.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATORS

	GE PROFILE	GE	
	PZS22MSK	GZS22DSJ GZS22DMJ GZS22DGJ	GZS22IYN GZS22IMN GZS22IEN
UFAS compliant	●	●	●
CAPACITY			
Total (cu. ft.)	21.9	21.9	21.8
Fresh food (cu. ft.)	14.24	14.07	14.23
Freezer (cu. ft.)	7.70	7.79	7.56
FRESH-FOOD FEATURES			
Multi-flow air system	●	●	
Electronic sensors	●	●	●
Actual-temperature display	●	●	●
External controls	●		
Turbo Cool setting	●		
GE water filtration system	XWFE	XWFE	XWFE
Crushed ice, cubes, water		Crushed ice, cubes, water	Crushed ice, cubes, water
Dispenser			
Integrated design	●	●	
Light	LED	LED	LED
Child lock and door alarm	●	●	
Quick Ice feature	●	●	●
Water filter indicator light	●	●	●
Cabinet shelves	4 glass	4 glass	4 glass
Adjustable	3	3	3
Slide-out, spillproof	2 (3 spillproof)	3 (4 spillproof)	
Crisper cover (fixed)	1	●	
Quick Space shelf	●		
Integrated shelf-support system	●	●	
Snugger clip(s)	2		
Drawer system	3-stack	2-stack	
Top drawer	Snack	Adj.-humidity	Snack
Middle drawer	Adj.-humidity		Adj.-humidity
Bottom drawer	Sealed	Sealed	Sealed
Clear Look door bins	4 (3 adj.)	4 (2 adj.)	
Door shelves			5 total, fixed
LED lighting	●	●	●
Dairy compartment			●
Never Clean condenser			●
FREEZER FEATURES			
Frost Guard technology	●	●	●
Icemaker	Integrated	●	Factory-installed
Drawer/Basket	2 drawers	1 wire basket	2
Cabinet shelves	3 glass	2 glass, 1 wire	3 glass
Wire tilt-out door bin(s)	3 adj.		
Door bin	1 fixed		
Interior lighting	●	●	●
EXTERIOR			
Color(s) available*	SS	SS ES WW/BB	FS/ES/DS
Handle color	Stainless with chrome	Stainless with chrome	
Handle design	Designer-style	Color-matched Designer-style	Color-matched Designer-style
Door design	Contoured	Flat front with rounded sides Flat front with rounded sides High-gloss flat front with rounded sides	Contoured
Textured steel door and case	Case only (dark gray)	Case only (dark gray) Case only (dark gray) Case only (color-matched)	Case only (dark gray) Color-matched (color models)
Adjustable rollers	Front	Front	2-point adjustable
WEIGHTS & DIMENSIONS			
Height to top of hinge (in.) A	69-7/8	69-1/4	70-1/8
Height to top of case (in.) B	69	68-3/4	69
Case depth without door (in.) C	24-1/8	24-1/8	24-1/4
Case depth less door handle (in.) D	28-1/2	27	28-3/4
Case depth with door handle (in.) E	30-3/4	29-1/2	30-3/4
Depth with fresh-food door open 90° (in.) F			
46-1/4		46	46-1/2
Width (in.) G	35-3/4	35-3/4	36
Width with door open 90° with door handle (in.) H	43-1/8	41-3/8	42-1/4
Each side (in.)	1/8	1/8	1/8
Top (in.)	1	1	1
Back (in.)	2	2	2
Approx. shipping wt. (lbs.)	360	360	340
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS = Fingerprint Resistant Stainless, ES = Slate, DS = Black Slate, WW = White, BB = Black.  
If installed against a wall, allow clearance of 14" on freezer side to remove bin.  
Clearance required to remove fresh-food full-size pan without disassembling is 18-5/8".  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATORS DIMENSIONS




Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



ROUGH-IN DIMENSIONS STANDARD, NEW CONSTRUCTION AND REPLACEMENT INSTALLATION

- Installation tips to maximize the built-in look**
- All wall/floor molding should be removed prior to installation.
  - Water recess on rear wall recommended to prevent water line damage. 48" minimum length, 1/4"-diameter water line tubing recommended.
  - When possible, recess both copper water line and electrical outlet (see local codes).
  - Front and rear leveling legs are adjustable for the built-in look (see owner's manual).

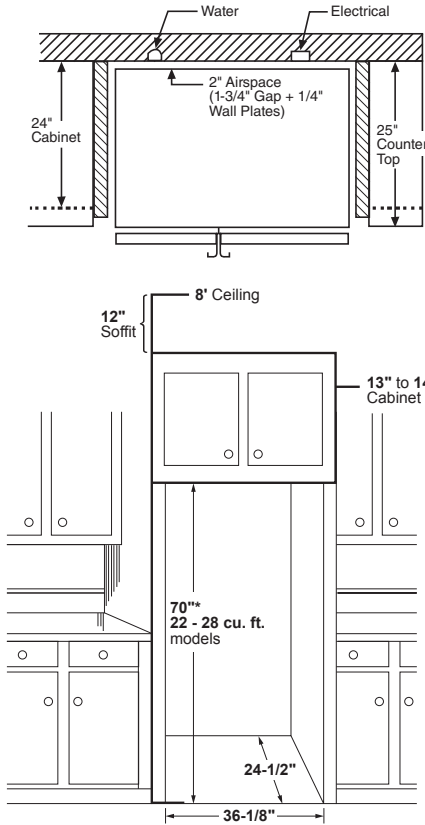

\*The rough-in dimension of 70" for 22-28 cu. ft. models is minimum and measured from the finished floor to top of opening (or the underside of the overhead cabinets).

**IMPORTANT:** Before finalizing specifications for your counter-depth refrigerator, please NOTE: A minimum width of 36" is required for refrigerator installation.

SEE PAGE 233 FOR WATER OUTLET INSTALLATION.




GE PROFILE™ SIDE-BY-SIDE REFRIGERATORS

	“K” SERIES	
	PSS28KSH	PSE25KBL PSE25KSH
ENERGY STAR® certified		●
UFAS compliant	●	●
CAPACITY		
Total (cu. ft.)	28.4	25.3
Fresh food (cu. ft.)	18.00	16.23
Freezer (cu. ft.)	10.16	9.03
FRESH-FOOD FEATURES		
Air tower	●	●
Electronic sensors	●	●
Actual-temperature display	●	●
External controls	●	●
Turbo Cool setting	●	●
GE water filtration system	XWFE	XWFE
Dispenser	Crushed ice, cubes, water	Crushed ice, cubes, water
Integrated design	●	●
Light	LED	LED
Child lock and door alarm	●	●
Quick Ice feature	●	●
Water filter indicator light	●	●
Cabinet shelves	4 glass	4 glass
Adjustable	3	3
Slide-out, spillproof	2	2
Crisper cover (fixed)	1	1
Quick Space shelf	●	●
Integrated shelf-support system	●	●
3-stack drawer system	●	●
Top drawer	Snack	Snack
Middle drawer	Adj.-humidity	Adj.-humidity
Bottom drawer	Adj.-humidity	Adj.-humidity
Clear Look door bins	4 (3 adj. w/gallon storage)	4 (3 adj. w/gallon storage)
Interior lighting	LED	LED
FREEZER FEATURES		
Frost Guard technology	●	●
Arctica icemaker	●	●
Storage baskets	3	3
Cabinet shelves	2 glass	2 glass
Door bins	3 (2 adj.)	3 (2 adj.)
Interior lighting	LED	LED
EXTERIOR		
Color(s) available*	SS	TS SS
Handle color	Stainless with chrome	Black Stainless Stainless with chrome
Handle design	Designer-style	Designer-style
Door design	Contoured	Contoured
Door hinge		
Textured steel door and case	Case only (dark gray)	Case only (dark gray)
Adjustable rollers	Front	Front
WEIGHTS & DIMENSIONS		
Height to top of hinge (in.) A	69-1/2	69-1/4
Height to top of case (in.) B	69	68-3/4
Case depth without door (in.) C†	28-1/2	28-1/2
Case depth less door handle (in.) D†	34	32-3/4
Case depth with door handle (in.) E†	36-1/2	35-1/4
Depth w/fresh-food door open 90° (in.) F†	50-1/2	50-1/2
Width (in.) G	35-3/4	35-3/4
Width w/door open 90° w/door handle (in.) H	46-1/2	43-1/2
Each side (in.)	1/8	1/8
Top (in.)	1	1
Air clearances Back (in.)	2	2
Approximate shipping wt. (lbs.)	370	380
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, TS = Black Stainless.  
†Water hookup fits in back air clearance when calculating installation depth.  
If installed against a wall, allow clearance of 14-3/16" on 25 cu. ft. and 28 cu. ft. models on freezer side to remove ice bin. To remove fresh-food pans, remove door bins. Clearances required to remove fresh-food full-size pan without disassembling: 19" on 25 cu. ft. and 28 cu. ft. Allow additional space for any necessary leveling adjustments.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

SIDE-BY-SIDE REFRIGERATORS  
DIMENSIONS

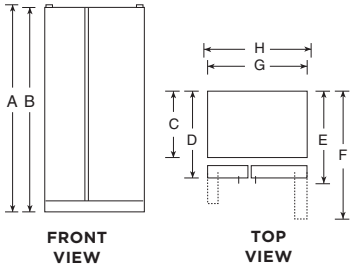

SEE PAGE 233 FOR WATER OUTLET INSTALLATION.


Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

GE SIDE-BY-SIDE REFRIGERATORS

	“G” SERIES				“I” SERIES
	GSE25GSH GSE25GGH	GSS25GSH GSS25GMH GSS25GGH	GSE23GSK GSE23GGK	GSS23GSK GSS23GMK GSS23GGK	GSS25IYN GSS25IMN GSS25IEN GSS25IGN
ENERGY STAR certified	●		●		
UFAS compliant	●	●	●	●	●
CAPACITY					
Total (cu. ft.)	25.3	25.3	23.2	23.2	25.1
Fresh food (cu. ft.)	16.07	16.07	16.23	16.23	16.23
Freezer (cu. ft.)	9.25	9.25	6.94	6.94	8.91
FRESH-FOOD FEATURES					
Electronic sensors	●	●	●	●	●
Exterior temperature controls	Actual temp.	Actual-temp.	Actual-temp.	Actual-temp.	Actual-temp.
GE water filtration system	XWFE	XWFE	XWFE	XWFE	XWFE
Dispenser	Arctica icemaker with crushed ice, cubes & water	Arctica icemaker with crushed ice, cubes & water	Arctica icemaker with crushed ice, cubes & water	Arctica icemaker with crushed ice, cubes & water	Water, cubed/ crushed ice
Light and child lock	LED	LED	LED	LED	
Door alarm	●	●	●	●	●
Water filter indicator light	●	●	●	●	
Cabinet shelves	4 glass	4 glass	4 glass	4 glass	5 glass
Adjustable	3	3	3 (2 slide-out)	3 (2 slide-out)	3
Slide-out, spillproof	3 (2 slide-out)	3 (2 slide-out)	●	●	3 (slide-out)
Integrated shelf support system	●	●	●	●	
2-stack drawer system	●	●	●	●	
Top drawer	Adj.-humidity	Adj.-humidity	Adj.-humidity	Adj.-humidity	Adj.-humidity
Bottom drawer	Clear	Clear	Clear	Clear	●
Snack drawer	●	●	●	●	●
Door bins	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)	4 (3 adj. with gallon storage)
Dairy compartment	●	●	●	●	●
Interior lighting	●	LED	●	LED	●
FREEZER FEATURES					
Frost Guard technology	●	●	●	●	●
Factory-installed icemaker	Arctica icemaker	Arctica icemaker	●	●	●
Cabinet shelves	3 (2 adj.) wire	3 (2 adj.) wire	3 (2 adj.) wire	3 (2 adj.) wire	3 glass, edge-to-edge
Storage basket(s)	1 slide-out	1 slide-out	1 slide-out	1 slide-out	2
Door bins	4 (2 adj.)	4 (2 adj.)	4 (2 adj.)	4 (2 adj.)	1
Interior light	●	LED	●	LED	●
EXTERIOR					
Color(s) available*	SS/WW, CC, BB	SS/ES/WW, BB	SS/WW, CC, BB	SS/ES/WW, BB	FS/ES/DS/WW, BB
Handle color	Stainless with chrome Color-matched	Stainless with chrome Stainless with chrome Color-matched	Stainless Color-matched	Stainless Color-matched	Color-matched
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Door design	Contoured High-gloss contoured	Contoured Contoured High-gloss contoured	Contoured High-gloss contoured	Contoured Contoured High-gloss contoured	Contoured/Smooth Dark gray (premium finishes), color-matched (color models)
Textured steel case	Case only (dark gray) Case only (color-matched)	Case only (dark gray) Case only (dark gray) Case only (color-matched)	Case only (dark gray) Case only (color-matched)	Case only (dark gray) Case only (dark gray) Case only (color-matched)	
Adjustable rollers	Front	Front	Front	Front	2-point adjustable
WEIGHTS & DIMENSIONS					
Height to top of hinge (in.) A	69-1/2	69-1/2	69-1/2	69-1/2	70-1/8
Height to top of case (in.) B	69	69	69-1/2	69-1/2	69
Case depth without door (in.) C†	28-1/2	28-1/2	28-1/2	28-1/2	28-1/2
Case depth less door handle (in.) D†	32-3/4	32-3/4	32-3/4	32-3/4	32-3/4
Case depth with door handle (in.) E†	35-1/4	35-1/4	35-1/4	35-1/4	34-3/4
Depth w/fresh-food door open 90° (in.) F†	50-1/2	50-1/2	50-1/2	50-1/2	50-1/2
Width (in.) G	35-3/4	35-3/4	32-3/4	32-3/4	36
Width w/door open 90° with door handle (in.) H	43-1/2	43-1/2	38-1/4	38-1/4	42-1/4
Each side (in.)	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1
Air clearances Back (in.)	2	2	2	2	2
Approx. shipping wt. (lbs.)	340	340	344	344	320
Power/Ratings	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS = Fingerprint Resistant Stainless, ES = Slate, DS = Black Slate, WW = White, CC = Bisque, BB = Black.  
†Water hookup fits in back air clearance when calculating installation depth.  
If installed against a wall, allow clearance of 10-3/4" on 23 cu. ft. models; 14-1/4" on 25 cu. ft. models on freezer side to remove bin. Clearances required to remove fresh-food full-size pan without disassembling: 15" on 23 cu. ft.; and 19" on 25 cu. ft. Allow additional space for any necessary leveling adjustments.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

SIDE-BY-SIDE REFRIGERATORS  
DIMENSIONS

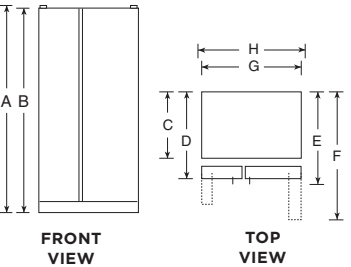

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

SEE PAGE 233 FOR WATER OUTLET INSTALLATION.




TOP-FREEZER REFRIGERATORS

	GE
	GTE19DTN
ENERGY STAR® certified	●
UFAS/ADA compliant	●
CAPACITY	
Total (cu. ft.)	19.1
Fresh food (cu. ft.)	13.5
Freezer (cu. ft.)	5.6
FRESH-FOOD FEATURES	
Upfront temperature controls	●
Cabinet shelves	2 wire, 1 glass
Adjustable	2 adj.
Drawers	2 clear
Door shelves	2 half-width (adj. gallon storage)
Dairy compartment	●
Interior lighting	LED
Never Clean condenser	●
FREEZER FEATURES	
Icemaker	Opt. (IM4D)
Spillproof freezer floor	●
Freezer compartment shelves	1 adjustable wire
Fixed door shelves	2 fixed
EXTERIOR	
Color(s) available*	WW/BB
Handle color	Smooth color-matched
Door design	Rounded
Textured steel case	Color-matched
Reversible doors	●
WEIGHTS & DIMENSIONS	
Height to top of hinge (in.) A	66 3/8
Height to top of case (in.) B	65-7/8
Case depth without door (in.) C	28 5/8
Case depth less door handle (in.) D	32-5/8
Case depth with door handle (in.) E	34 1/2
Depth w/fresh-food door open 90° (in.) F	60-1/2
Width (in.) G	29-3/4
Width w/door open 90° with door handle (in.) H	29-6/7
Each side (in.)	1/8
Air Top (in.)	1
clearances Back (in.)	2
Approx. shipping wt. (lbs.)	197
Power/Ratings	120V, 60Hz, 15Amps

\*Color(s) available: WW = White, BB = Black.  
\*Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.

**Note: All top-freezer, no-frost, right-hand refrigerator doors:** As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.  
**All top-freezer, no-frost, left-hand refrigerator doors:** As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.


TOP-FREEZER REFRIGERATORS DIMENSIONS



	GE			
	GTE16DTN	GTS16DTN	GPE17CTN	GTS17DTN
ENERGY STAR certified	●		●	
#1 in quality & dependability†	●	●	●	●
UFAS/ADA compliant	●	●	●	●
CAPACITY				
Total (cu. ft.)	15.6	15.6	16.6	16.6
Fresh food (cu. ft.)	11.58	11.58	12.6	12.6
Freezer (cu. ft.)	4.03	4.03	4.03	4.03
FRESH-FOOD FEATURES				
Upfront temperature controls	●		●	●
Cabinet shelves	2 wire (adj), 1 glass (fixed)	2 wire (adj), 1 glass (fixed)	2 wire (adj), 1 glass (fixed)	2 wire (adj), 1 glass (fixed)
Drawers	2 clear	2 clear	2 clear	2 clear
Door shelves	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)
Dairy compartment	●	●	●	●
Interior lighting	LED	LED	LED	LED
Never Clean condenser	●	●	●	●
FREEZER FEATURES				
Icemaker	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)
Spillproof freezer floor	●	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire
Fixed door shelves	2 full-width	2 full-width	2 full-width	2 full-width
EXTERIOR				
Color(s) available*	WW/CC	WW	WW	WW/BB
Handle color	Smooth color-matched	Smooth color-matched	Smooth color-matched recessed	Smooth color-matched
Handle design	Designer-style	Designer-style	Side pocket	Designer-style
Field-installed handles	●	●	●	●
Door design	Textured	Textured	Textured	Textured
Textured steel case	Color-matched	Color-matched	Color-matched	Color-matched
Reversible doors	●	●	●	●
WEIGHTS & DIMENSIONS				
Height to top of hinge (in.) A	61-3/4	61-3/4	64-3/4	64-3/4
Height to top of case (in.) B	61-1/4	61-1/4	64-1/4	64-1/4
Case depth without door (in.) C	26-3/4	26-3/4	26-3/4	26-3/4
Case depth less door handle (in.) D	30-1/2	30-1/2	30-1/2	30-1/2
Case depth with door handle (in.) E	32-5/8	32-5/8	30-1/2	32-5/8
Depth w/fresh-food door open 90° (in.) F	57	57	57	57
Width (in.) G	28	28	28	28
Width w/door open 90° with door handle (in.) H	30-5/8	30-5/8	28-1/2	30-5/8
Each side (in.)	3/4	3/4	3/4	3/4
Air Top (in.)	1	1	1	1
clearances Back (in.)	1	1	1	1
Approx. shipping wt. (lbs.)	165	165	171	171
Power/Ratings	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: WW = White, CC = Bisque, BB = Black.  
\*\*Available in left-hand door swing on white model only.  
†Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.

TOP-FREEZER REFRIGERATORS DIMENSIONS






TOP-FREEZER REFRIGERATORS


	GE								
	GTE17DTN	GTS17GSN GTS17GTN	GTE17GTN GTE17GSN	GIE17GSN	GTS18DTN	GTE18DTN GTE18DCN	GTE19DTN	GIE18DTN	GTS18GSN GTS18GTN
ENERGY STAR® certified	●		●	●		●	●	●	
#1 in quality & dependability†	●	●	●	●	●	●	●	●	●
UFAS/ADA compliant	●	●	●	●			●		
CAPACITY									
Total (cu. ft.)	16.6	16.6	16.6	16.6	17.5	17.5	19	13.49	17.5
Fresh food (cu. ft.)	12.6	12.6	12.6	12.6	13.49	13.9	13.5	17.5	13.49
Freezer (cu. ft.)	4.03	4.03	4.03	4.03	4.03	4.03	5.6	4.03	4.03
FRESH-FOOD FEATURES									
Upfront temperature controls	●	●	●	●	●	●	●	●	●
Autofill pitcher									
Cabinet shelves	2 wire (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 wire (adj.), 1 glass (fixed)	2 wire (adj.), 1 glass (fixed)	1 glass	2 wire	2 wire (adj.), 1 glass (fixed)
Drawers	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear
Deli bin	1 sliding	1 sliding	1 sliding	1 sliding					1 Snack
Door shelves	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)	2 half-width (adj. with gallon storage)	2 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)
Dairy compartment	●	●	●	●	●	●	●	●	●
Interior lighting	LED	LED	LED	LED	LED	LED		LED	LED
Never Clean condenser	●	●	●	●	●	●	●	●	●
FREEZER FEATURES									
Icemaker	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)	Factory-installed	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)	Factory-installed	Opt. (IM4D)
Spillproof freezer floor	●	●	●	●	●	●	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire		1 full-width wire	1 full-width wire
Fixed door shelves	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 fixed	2 full-width	2 full-width
EXTERIOR									
Color(s) available*	WW/CC/BB	SS/WW	SS/WW/BB	SS	WW/BB	SA/WW/BB	WW/BB	WW/BB	SS/WW/BB
Handle color	Smooth color-matched	Smooth color-matched	Smooth color-matched	Stainless	Smooth color-matched	Smooth color-matched	Smooth color-matched	Smooth color-matched	Smooth color-matched
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style		Designer-style	Designer-style
Field-installed handles	●	●	●	●	●	●		●	●
Door design	Textured	Textured	Textured	Textured	Textured	Textured	Textured	Textured	Textured
Textured steel case	Color-matched	Color-matched	Dark gray (premium finishes), color-matched (color models)	Case only (dark gray)	Color-matched	Dark gray (premium finishes), color-matched (color models)	Color-matched	Color-matched	Dark gray (premium finishes), color-matched (color models)
Reversible doors	●	●	●	●	●	●	●	●	●
WEIGHTS & DIMENSIONS									
Height to top of hinge (in.) A	64-3/4	64-3/4	64-3/4	64-3/4	67-3/8	67-3/8	66 3/8	67-3/8	67-3/8
Height to top of case (in.) B	64-1/4	64-1/4	64-1/4	64-1/3	66-7/8	66-7/8	"	65 7/8"	66-7/8
Case depth without door (in.) C	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	28 5/8	26-3/4	26-3/4
Case depth less door handle (in.) D	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2	30	30-1/2	30-1/2
Case depth with door handle (in.) E	32-5/8	32-5/8	32-5/8	32-5/8	32-5/8	32-5/8	34 1/2	32-5/8	32-1/2
Depth w/fresh-food door open 90° (in.) F	57	57	57	57	57	57	"	60 1/2"	57
Width (in.) G	28	28	28	28	28	28	"	29 3/4"	28
Width w/door open 90° w/door handle (in.) H	30-5/8	30-5/8	30-5/8	30-5/8	30-5/8	30-5/8	32 3/8	30-5/8	30-5/8
Each side (in.)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Top (in.)	1	1	1	1	1	1	1	1	1
Back (in.)	1	1	1	1	2	2	2	2	2
Approx. shipping wt. (lbs.)	172	172	175	177	179	179	225	181	192
Power/Ratings	120V, 60Hz, 15Amps								

\*Color(s) available: SS = Stainless, ES = Slate, WW = White, CC = Bisque, SA = Silver, BB = Black.  
†Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.

TOP-FREEZER REFRIGERATORS DIMENSIONS



TOP-FREEZER REFRIGERATORS DIMENSIONS



**Note: All top-freezer, no-frost, right-hand refrigerator doors:** As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.  
**All top-freezer, no-frost, left-hand refrigerator doors:** As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.




TOP-FREEZER REFRIGERATORS

	GE		
	GTE22JSN GTE22JTN GTE22JMN	GIE22JSN GIE22JTN GIE22JMN	GTS22KGN GTS22KMN GTS22KSN
	ENERGY STAR® certified	●	●
	UFAS/ADA compliant	●	●
CAPACITY			
Total (cu. ft.)	21.9	21.9	21.9
Fresh food (cu. ft.)	15.25	15.25	15.25
Freezer (cu. ft.)	6.68	6.68	6.68
FRESH-FOOD FEATURES			
Upfront temperature controls	●	●	●
Cabinet shelves	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)
Drawers	2 clear	2 clear	2 clear
Deli bin	1 sliding	1 sliding	1 sliding
Door shelves	2 full-width (1 with gallon storage)	2 full-width (1 with gallon storage)	2 full-width (1 with gallon storage)
Dairy compartment	●	●	●
Interior lighting	LED	LED	LED
Never Clean condenser	●	●	●
FREEZER FEATURES			
Icemaker	Opt. (IM4D)	Factory-installed	Opt. (IM4D)
Spillproof freezer floor	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	1 full-width glass
Fixed door shelves	2 full-width	2 full-width	2 full-width
EXTERIOR			
Color(s) available*	SS/ES/WW/CC/BB	SS/ES/WW/BB	SS/ES/DS/WW/BB
Handle color	Smooth color-matched	Smooth color-matched	Smooth color-matched
Handle design	Designer-style	Designer-style	Designer-style
Field-installed handles	●	●	●
Door design	Textured Dark gray (premium finishes), color-matched (color models)	Textured Dark gray (premium finishes), color-matched (color models)	Textured Dark gray (premium finishes), color-matched (color models)
Textured steel case			
Reversible doors	●	●	●
WEIGHTS & DIMENSIONS			
Height to top of hinge (in.) A	66-3/8	66-3/8	66-3/8
Height to top of case (in.) B	65-7/8	65-7/8	65-7/8
Case depth without door (in.) C	28-5/8	28-5/8	25-5/8
Case depth less door handle (in.) D	32-3/8	32-3/8	32-3/8
Case depth with door handle (in.) E	34-1/2	34-1/2	34-1/2
Depth w/fresh-food door open 90° (in.) F	63-1/2	63-1/2	63-1/2
Width (in.) G	32-3/4	32-3/4	32-3/4
Width w/door open 90° with door handle (in.) H	35-3/8	35-3/8	35-3/8
Each side (in.)	1/8	1/8	1/8
Air clearances	Top (in.) Back (in.)	1 2	1 2
Approx. shipping wt. (lbs.)	238	238	227
Power/Ratings	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, ES = Slate, DS=Black Slate, WW = White, CC = Bisque, BB = Black.  
\*Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel.  
Source: The Stevenson, Company, 2016.


TOP-FREEZER REFRIGERATORS  
DIMENSIONS



	GE	
	GPE12FSK GPE12FGK	
	ENERGY STAR certified	●
	ADA compliant	●
CAPACITY		
Total (cu. ft.)	11.6	
Fresh-food (cu. ft.)	8.48	
Freezer (cu. ft.)	3.14	
FRESH-FOOD FEATURES		
Upfront temperature controls	Electronic	
Cabinet shelves	2 spillproof glass	
Spill-resistant	●	
Drawers	2 clear	
Door shelves	3 full-width (2 with gallon storage)	
Interior lighting	LED	
Never Clean condenser	●	
FREEZER FEATURES		
Factory-installed icemaker and bin	Opt. (IM4D)	
Wire freezer compartment shelves	Step	
Fixed door shelves	2 clear full-width	
EXTERIOR		
Color(s) available*	SB WW, BB	
Handle color	Black	
Handle design	Recessed	
Exterior design	Rounded doors	
Smooth steel door and case	●	
Reversible doors	●	
WEIGHTS & DIMENSIONS		
Height to top of hinge (in.) A	59-7/8	
Height to top of case (in.) B	59-3/8	
Case depth without door (in.) C	25-5/8	
Case depth less door handle (in.) D	28-5/8	
Case depth with door handle (in.) E	28-5/8	
Depth w/fresh food door open 90° (in.) F	50-5/8	
Width (in.) G	24	
Width w/door open 90° w/door handle (in.) H	25-1/8	
Air clearances	Each side (in.) Top (in.) Back (in.)	
Approx. shipping wt. (lbs.)	151	
Power/Ratings	120V, 60Hz, 15Amps	

\*Color(s) available: SB = Stainless, WW = White, BB = Black.


TOP-FREEZER REFRIGERATOR  
DIMENSIONS



GE WINE AND BEVERAGE CENTERS

	WINE CENTERS			BEVERAGE CENTERS		
	PCR06WAT	GWS04HAE	PWS06DSP	PVS06BSP	PCR06BAT	GVS04BQN
CAPACITY						
Total (cu. ft.)	5.5	4.1	4.8	5.1	5.5	4.1
Can capacity				155	150	125
Bottle capacity	57	30	44	52	12	31
FRESH-FOOD FEATURES						
Temperature controls	Electro-mechanical (45°–55°F)	Electronic with actual-temp. (45°–61°F)	Dual Zone: Upper: 43–61°F, Lower: 44–62°F	Adjustable 38–61°F	Electro-mechanical (41°–55°F)	Electronic with actual-temp. (41°–61°F)
Glass door	Tinted	Tinted w/stainless trim	Glass door with stainless trim	Glass door with stainless trim	Tinted	Tinted w/stainless trim
Door design	Contoured	Flat	Contoured	Contoured	Contoured	Flat
Shelves		4 full-depth removable, 1 half-depth	6 wood extension shelves	4 wood and glass reversible	3 glass, spillproof	3 full-depth removable, 2 half-depth
Wine racks	7	5	6	4	2	5 wood
Full-extension	●			3/4 extension	●	
Reversible			●			
Interior lighting	On/Off switch	●	Display (on) / Door (on/off)	Display (on) / Door (on/off)	On/Off switch	●
Lock		●				
Door Alarm			●	●		
EXTERIOR						
Color(s) available	Black case and stainless trim	Black case and stainless trim	Black case with Fingerprint Resistant Stainless trim, Fingerprint Resistant Stainless trim/Black case with Fingerprint Resistant Black Stainless trim	Black case with Fingerprint Resistant Stainless trim, Fingerprint Resistant Stainless trim/Black case with Fingerprint Resistant Black Stainless trim	Black case and stainless trim	Black case and stainless trim
Door handle	Recessed	Stainless	Color-matched	Color-matched	Recessed	Stainless
Built-in capability	●	●	●	●	●	●
Free-standing capability	●	●	●	●	●	●
Cabinet liner color	White	Black	Black	Black	White	Black
Reversible door	●				●	
WEIGHTS & DIMENSIONS						
Height (in.) A	34-1/4	33	33-3/4	33-3/4	34-1/4	33
Width (in.) B	23-3/4	19	23-1/2	23-1/2	23-3/4	19
Depth with handle (in.) C	25	22-1/2	24-5/8	24-5/8	25	22-1/2
Depth with door open 90° (in.) D	45-1/4	38-5/8	45-1/4	45-1/4	45-1/4	38-5/8
Each side (in.)	0	0	0	0	0	0
Air clearances	Back (in.) Top (in.)	0 0	0 0	0 0	0 0	0 0
Approx. shipping wt. (lbs.)	120	77	125	125	120	77

WINE AND BEVERAGE CENTERS  
DIMENSIONS





COMPACT REFRIGERATORS


	GE		
	GCE06GSH GCE06GGH	GME04GLK GME04GGK	GDE03GLK GDE03GGK
ENERGY STAR® certified	●	●	●
CAPACITY			
Total (cu. ft.)	5.6	4.4	3.1
Fresh food (cu. ft.)	5.12	3.93	2.12
Freezer (cu. ft.)	.49**	.47**	.93**
FEATURES			
Ice trays	2 mini	1 mini	1 mini
Defrost	Manual	Manual	Partial automatic
Crisper drawer	●		●
Cabinet shelves	2 glass	3 glass	2 glass
Can rack	●	●	●
Door shelves	1 full-width, 2 half-width	1 full-width, 2 half-width	2 half-width
Separate true freezer			●
Interior light	●		●
ECONOMICAL/QUIET			
Cabinet/door insulation	Foam	Foam	Foam
EXTERIOR			
Color(s) available*	SB WW/BB	LB WW/BB	LB WW/BB
Door handle	Black recessed	Black recessed	Black recessed
Rounded door	Color-matched	Color-matched	Color-matched
Reversible door	recessed	recessed	recessed
WEIGHTS & DIMENSIONS			
Height (in.) A	34-1/8	33-7/8	33-3/8
Width (in.) B	23-5/8	19-3/4	18-3/4
Depth with handle (in.) C	23-3/4	21-1/4	20-1/8
Depth with door open 90° (in.) D	46	39-1/8	37
Air clearances	Each side (in.)	1/2	1/2
	Top (in.)	0	2
	Back (in.)	0	2
Approx. shipping wt. (lbs.)	85	65	63
Voltage rating	120V	120V	120V

\*Color(s) available: SB = Stainless, LB = CleanSteel™, WW = White, BB = Black.  
\*\*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about two weeks. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.  
†If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.

ICE MAKERS

	GOURMET ICE UCC15NJII	NUGGET ICE UNC15NJII
CAPACITY		
Daily ice production (lbs.)	Up to 48	Up to 56
Storage bin capacity (lbs.)	26	26
FEATURES		
Interior lighting	LED	LED
Clean light	Yes	Yes
Control type	Electronic LED	Electronic LED
Ice scoop	Yes	Yes
EXTERIOR		
Handle	Custom handle or Stainless door accessory kit required	Custom handle or Stainless door accessory kit required
Panel capability	3/4" custom panel or accessory door kit	3/4" custom panel or accessory door kit
Color appearance	Custom panel and handle or Stainless door accessory required	Custom panel and handle or Stainless door accessory required
Door swing	Reversible hinges	Reversible hinges
Installation	Built-in or free-standing	Built-in or free-standing
Leveling system	Indoor or outdoor	Indoor or outdoor
	4 leveling legs	4 leveling legs
WEIGHTS & DIMENSIONS		
Width (in.)	14-7/8	14-7/8
Height (in.)	33-7/8	33-7/8
Depth (in.)	22-3/4	22-3/4
Depth excluding panel (in.)	22	22
Net weight (lbs.)	107	112
Approx. shipping weight (lbs.)	115	120
Power/Ratings	110V, 60Hz, 5A	110V, 60Hz, 5A
ACCESSORIES		
Optional Stainless panel with handle	PIP7OSS (Stainless panel with GE Profile™ handle)	PIP7OSS (Stainless panel with GE Profile™ handle)/ GE Café handle)
Optional drain pump kit	UPK3	UPK3
Optional filter	GXRLQK	GXRLQK

COMPACT REFRIGERATORS DIMENSIONS

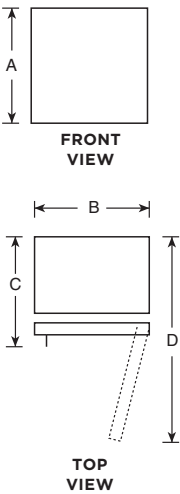

UPRIGHT FREEZERS


	GE					
	Frost-free					
	FUF21DL	FUF21SM	FUF17DL	FUF17SM	FUF14DL	FUF14SM
ENERGY STAR certified	●		●		●	
CAPACITY						
Total volume (cu. ft.)	21.3	21.3	17.3	17.3	14.1	14.1
FEATURES						
Temperature control	Easy-set electronic	Easy-set electronic	Easy-set electronic	Easy-set electronic	Easy-set electronic	Easy-set electronic
Audible temperature alarm	●	●	●	●	●	●
Door ajar alarm	●	●	●	●	●	●
Door shelves (total)	4 clear	4 opaque	4 clear	4 opaque	4 clear	4 opaque
Interior lighting	LED	LED	LED	LED	LED	LED
Lock with self-ejecting key	●	●	●	●	●	●
Cabinet shelves (total)	4 glass (2 adj.)	4 wire (2 adj.)	4 glass (2 adj.)	4 wire (2 adj.)	4 glass (2 adj.)	4 wire (2 adj.)
Slide-out bulk storage basket	3 clear plastic	1 wire	3 clear plastic	1 wire	2 clear plastic	1 wire
Turbo Freeze system	●	●	●	●	●	●
Garage Ready*	●	●	●	●	●	●
ECONOMICAL/QUIET						
Magnetic door gasket	●	●	●	●	●	●
Air tower	●	●	●	●	●	●
EXTERIOR						
Color available	White	White	White	White	White	White
Door handle	High-gloss	High-gloss	High-gloss	High-gloss	High-gloss	High-gloss
Textured steel case	●	●	●	●	●	●
Smooth steel door	●	●	●	●	●	●
WEIGHTS & DIMENSIONS						
Height (in.) A	76-5/8	76-5/8	64-7/8	64-7/8	62	62
Width (in.) B	32-7/8	32-7/8	32-7/8	32-7/8	28-3/8	28-3/8
Case depth without door (in.) C	26	26	26	26	26-7/8	26-7/8
Depth without door handle (in.) D	29	29	29	29	29-3/4	29-3/4
Depth with door handle (in.) E	31-1/4	31-1/4	32-7/8	32-7/8	32-1/8	32-1/8
Depth with door open (in.) 90° F	60	60	60	60	55-3/4	55-3/4
Air clearances	Each side (in.)	3	3	3	3	3
	Top (in.)	3	3	3	3	3
	Back (in.)	3	3	3	3	3
Approx. shipping wt. (lbs.)	244	244	227	227	200	200

\*GE freezers are proven to perform at room temperature ranging between 0°F to 110°F.


CHEST FREEZERS

	GE					
	FCM22DL	FCM16DL	FCM16SL	FCM11PH	FCM7SK	FCM5SK
ENERGY STAR certified	●	●		●		
CAPACITY						
Total volume (cu. ft.)	21.7	15.7	15.7	10.6	7.0	5.0
FEATURES						
Manual defrost	●	●	●	●	●	●
Temperature control	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Audible temperature alarm	With light and reset button	With light and reset button				
Power "ON" light	●	●	●	●	●	●
Wraparound condenser	●	●	●	●	●	●
Wraparound evaporator	●	●	●	●	●	●
Upfront defrost water drain	●	●	●	●	●	●
Interior lighting	LED	LED	LED	●		
Lock with key	●	●	●	●		
Lift-out, sliding bulk storage basket(s)	5	4	2	3	2	1
Second-level rail	●	●				
Dividers	4 customizable					
ECONOMICAL/QUIET						
Insulation (cabinet and lid)	●	●	●	●	●	●
Cabinet liner	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum
EXTERIOR						
Color available	White	White	White	White	White	White
Handle	●	●	●	Recessed	Recessed	Recessed
WEIGHTS & DIMENSIONS						
Height (in.) A	33-3/8	33-3/8	33-3/8	33-1/2	33-1/2	33-1/2
Width (in.) B	73-14	65	65	50-3/4	37-1/4	28-3/4
Depth (in.) C	33	28-1/2	28-1/2	27-1/2	21-1/4	21-1/4
Height with lid open (in.) D	64-1/4	60-5/8	60-5/8	59	53	53
Air clearances	Each side (in.)	2	2	3	3	3
	Back (in.)	2	2	3	3	3
Approx. shipping wt. (lbs.)	232	181	190	125	82	69

UPRIGHT FREEZERS DIMENSIONS



CHEST FREEZERS DIMENSIONS

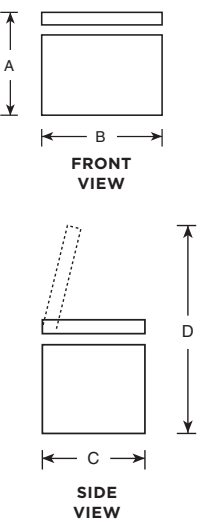




30" BUILT-IN DOUBLE OVENS

	GE PROFILE™			GE	
	PTD9000SN PTD9000BN	PTD7000SN PTD7000BN	PTD700LSN PTD700RSN	JTD5000SN JTD5000EN JTD5000FN JTD5000DN	JTD3000SN JTD3000EN JTD3000DN
FEATURES & CONTROLS					
Total oven capacity (cu. ft.)	10	10	10	10	10
Oven cooking technology	Upper Convection Lower Convection	Convection Convection	Convection Convection	Convection Convection	Traditional Traditional
Self-clean oven with Steam Clean option	●	●	●	●	●
Delay clean option	Variable	Variable	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●	●	●
True European Convection	●	●	●	●	
Direct Air	●	●	●		
Convection Bake multi/single rack	●	●	●		
Convection Roast	●	●	●	Upper	
Convection Broil	●	●	●		
Convection Bake	●	●	●	Upper	
Thermal Bake	●	●	●	●	●
Thermal Broil	●	●	●	●	●
Precision Cooking	●	●	●		
In-oven camera	Upper				
Ten-pass bake element	●	●	●	●	●
Ten-pass dual broil element	●	●	●		
Eight-pass broil element				●	●
Hidden bake oven interior	●	●	●	●	●
Control type	7" full-color LCD touch screen	7" full-color LCD touch screen	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●	●	●		●
Scan-to-Cook technology	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	
Proof mode	●	●	●		●
Oven meat probe	●	●	●	Upper	
Warm mode	●	●	●		●
Temperature display	●	●	●	●	●
Delay bake option	●	●	●	●	●
°C and °F programmable	●	●	●	●	●
Audible preheat signal	●	●	●	●	●
Auto oven shut-off with override	●	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●	●
Control lock capability	●	●	●	●	●
Halogen interior oven lighting	●	●	●	●	●
Certified Sabbath mode	●	●	●	●	●
Never-scrub oven racks					
Heavy-duty oven racks	4 roller racks 6 embossed (both ovens)	2, 2 roller racks 6 embossed (both ovens)	2, 2 roller racks 6 embossed (both ovens)	3, 1 roller rack 6 embossed (both ovens)	4 6 embossed (both ovens)
Rack positions					
APPEARANCE					
Color appearance*	SS TS	SS TS	SS SS	SS ES DS WW, BB	SS ES WW, BB
Handle color*	SS BB	SS TS	SS SS	SS ES DS WW, BB	SS ES WW, BB
Door swing			Left-swing Right-swing		
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Oven interior	Black gloss	Black gloss	Black gloss	Black gloss	Black gloss
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	308	308	308	263	255
Oven cabinet width required (in.)	30	30	30	30	30
Overall dimensions, including handle (WxHxD in inches)	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4
Overall oven interior dimensions (WxHxD in inches)	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4
POWER/RATINGS					
240V	9.0	9.0	9.0	8.4	8.4
KW rating @ 208V	6.8	6.8	6.8	6.3	6.3
240V	40	40	40	40	40
Amps @ 208V	40	40	40	40	40
Convection wattage	2,400	2,400	2,400	2,400	
Broiler wattage	4,300	4,300	4,300	4,000	4,000
Bake wattage	2,850	2,850	2,850	2,850	2,850


\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black.

OVEN SUPPORT FOR 30" OVEN MODELS

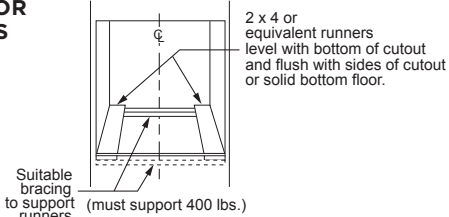


2 x 4 or equivalent runners level with bottom of cutout and flush with sides of cutout or solid bottom floor.



30" BUILT-IN DOUBLE OVEN DIMENSIONS (IN INCHES)  
MODELS PTD9000, PTD7000, JTD5000, JTD3000

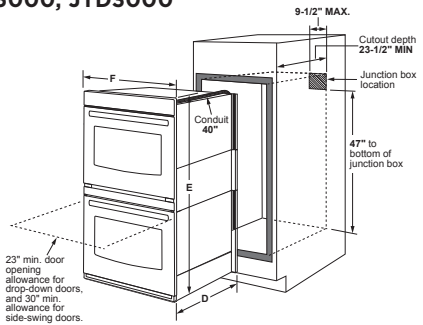

MODEL PTD700R



MODEL PTD700L

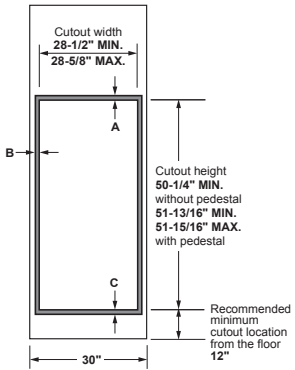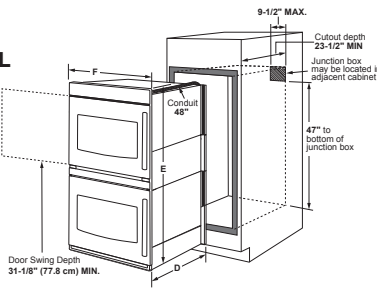

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

CABINET	PTD7000, JTD5000, JTD3000
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	3/4"
C - Overlap of oven at bottom of cutout	1-1/4"
OVEN	
D - Install depth	23-1/2"
E - Overall height with trim	53"
F - Overall width	29-3/4"

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

27" BUILT-IN DOUBLE OVENS



	GE PROFILE	GE	
	PKD7000SN PKD7000BN	JKD5000SN JKD5000EN JKD5000DN	JKD3000SN JKD3000DN
FEATURES & CONTROLS			
Total oven capacity (cu. ft.)	8.6	8.6	8.6
Oven cooking technology	Upper Convection Lower Traditional	Convection Convection	Traditional Traditional
Self-clean oven with Steam Clean option	●	●	●
Delay clean option	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●
True European Convection	●	●	
Convection Bake multi/single rack	Upper	Upper	
Convection Roast	Upper	Upper	
Convection Bake	Upper	Upper	
Thermal Bake	●	●	●
Thermal Broil	●	●	●
Ten-pass bake element	●	●	●
Eight-pass broil element	●	●	●
Hidden bake oven interior	●	●	●
Control type	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●	●	●
Scan-to-Cook technology	●	●	●
Auto Recipe Conversion	●	●	
Proof mode	●	●	●
Oven meat probe	Upper	Upper	
Warm mode	●	●	●
Temperature display	●	●	●
Delay bake option	●	●	●
°C and °F programmable	●	●	●
Audible preheat signal	●	●	●
Auto oven shut-off with override	●	●	●
Electronic clock and kitchen timer	●	●	●
Control lock capability	●	●	●
Halogen interior oven lighting	●	●	●
Certified Sabbath mode	●	●	●
Never-scrub oven racks	●	●	●
Heavy-duty oven racks	2, 2 roller racks 6 embossed (both ovens)	3, 1 roller rack 6 embossed (both ovens)	4 6 embossed (both ovens)
Rack positions			
APPEARANCE			
Color appearance*	SS TS	SS ES WW, BB	SS WW, BB
Handle color*	SS TS	SS ES WW, BB	SS WW, BB
Handle design	Designer-style	Designer-style	Designer-style
Oven interior	Black gloss	Black gloss	Black gloss
WEIGHTS & DIMENSIONS			
Approx. shipping wt. (lbs.)	241	241	229
Oven cabinet width required (in.)	27	27	27
Overall dimensions, including handle (WxHxD in inches)	26-3/4 x 51-1/8 x 26-5/8	26-3/4 x 51-1/8 x 26-5/8	26-3/4 x 51-1/8 x 26-5/8
Overall oven interior dimensions (WxHxD in inches)	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20
POWER/RATINGS			
240V	7.2	7.2	7.2
KW rating @ 208V	5.4	5.4	5.4
240V	40	40	40
Amps @ 208V	40	40	40
Convection wattage	2,400	2,400	
Broiler wattage	3,400	3,400	3,400
Bake wattage	2,600	2,600	2,600

\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

27" BUILT-IN DOUBLE OVEN DIMENSIONS (IN INCHES)  
MODELS PKD7000, JKD5000, JKD3000

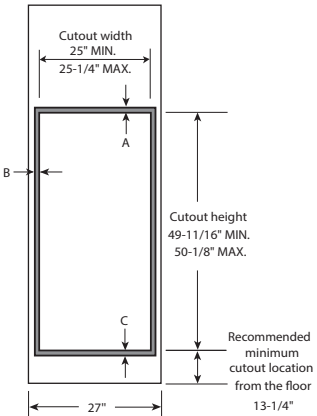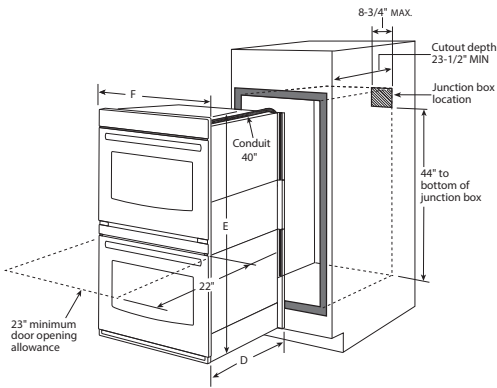


CABINET	PKD7000, JKD5000, JKD3000
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	1"
C - Overlap of oven at bottom of cutout	1"
OVEN	
D - Install depth	23-1/2"
E - Overall height with trim	51-1/8"
F - Overall width	26-3/4"

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

OVEN SUPPORT FOR W27" DOUBLE OVEN MODELS

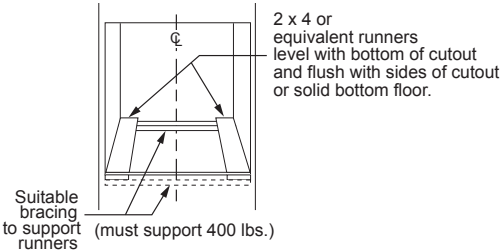

2 x 4 or equivalent runners level with bottom of cutout and flush with sides of cutout or solid bottom floor.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

See page 226 for warranty information.

geappliances.com 247



Listed by Underwriters Laboratories




24" BUILT-IN DOUBLE OVEN


	GE
	JRP28SK JRP28BJ
FEATURES & CONTROLS	
Capacity (cu. ft.)	2.7/2.7
Oven	Upper Lower
	Traditional Traditional
Standard clean	●
Delay clean option	Variable (upper)
Thermal Bake	●
Thermal Broil	●
Variable broil/Four-pass broil	Upper
Control type	Electronic touch
Temperature display	●
Delay bake option	●
°C and °F programmable	●
Audible preheat signal	●
Auto oven shut-off with override	●
Electronic clock and kitchen timer	●
Control lock capability	●
Certified Sabbath mode	●
Oven light	●
Oven racks	2 upper/2 lower
Rack positions	4 upper/4 lower
APPEARANCE	
Color appearance*	SS BB
Frameless oven doors	SS CM glass
Oven door with window	Big view
Handle color*	SS CM
Handle design	Designer-style
Oven interior	Black
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	176
Oven cabinet width required (in.)	24
Overall dimensions, including handle (WxHxD in inches)	23-3/4 x 48-5/8 x 23-1/8
Overall oven interior dimens. (WxHxD in inches)	Upper Lower
	17 x 15 x 18-1/2 17 x 15 x 18-1/2
POWER/RATINGS	
KW rating @	240V 208V
	7.1 5.3
Amps @	240V 208V
	30 30
Broiler wattage	3,400
Bake wattage	2,600

\*SS = Stainless, ES = Slate, WW = White on white, BB = Black on black, CM = Color-matched.

24" BUILT-IN DOUBLE OVEN  
DIMENSIONS (IN INCHES)  
MODEL JRP28

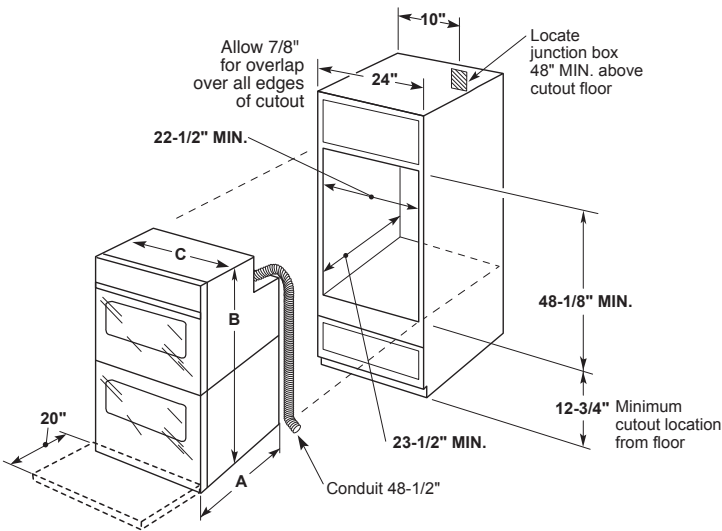

OVEN SUPPORT FOR 24" DOUBLE OVEN MODELS

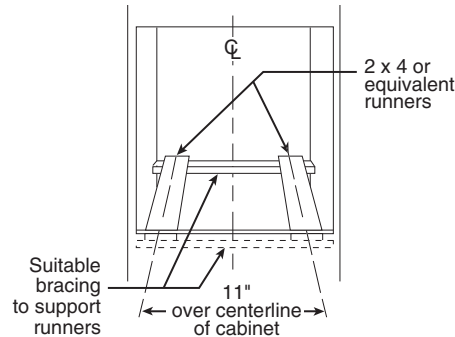

(Must support 275 lbs.)

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


30" BUILT-IN COMBINATION DOUBLE OVENS

	GE PROFILE™		GE
		PT7800SH PT7800BL PT7800EK PT7800DH	JT3800SH JT3800DH
FEATURES & CONTROLS			
Capacity (cu. ft.)	1.7/5.0	1.7/5.0	1.7/5.0
Oven			
Upper	Advantium®	Convection Microwave	Microwave
Lower	Convection	Convection	Traditional
Self-clean oven with Steam Clean option	Lower	Lower	Lower
Delay clean option	Variable	Variable	Variable
Advantium oven	Upper		
Speedcook 120V	up to 4 times		
Convection oven	250°-450°		
Microwave oven	Upper		
Warming	Upper		
Proofing	Upper		
Microwave oven		Upper	Upper
Convection bake		●	
Microwave cooking timer		●	●
Microwave power levels		10	10
Sensor functions		Upper	Upper
Microwave oven power output watts		1,000	1,000
16" turntable	●	●	●
True European Convection	Lower	Lower	
Convection Bake multi/single rack	Lower	Lower	
Convection Roast	Lower	Lower	
Thermal Bake	Lower	Lower	Lower
Thermal Broil	Lower	Lower	Lower
Ten-pass bake element	Lower	Lower	Lower
Eight-pass broil element	Lower	Lower	Lower
Control type	Dial & Glass touch	Dial & Glass touch	Dial & Glass touch
Preprogrammed menu items	Lower	Lower	
Proof mode	Lower	Lower	
Oven meat probe	Lower	Lower	
Warm mode	Lower	Lower	Lower
Temperature display	Lower	Lower	Lower
Delay bake option	Lower	Lower	Lower
°C and °F programmable	Lower	Lower	Lower
Audible preheat signal	Lower	Lower	Lower
Auto oven shut-off with override	Lower	Lower	Lower
Electronic clock and kitchen timer	Lower	Lower	Lower
Control lock capability	Lower	Lower	Lower
Certified Sabbath mode	Lower	Lower	Lower
Halogen interior oven light	Lower	Lower	Lower
Self-clean oven racks	Lower	Lower	Lower
Heavy-duty oven racks	2, 1 roller rack 6-ladder rack lower	2, 1 roller rack 6-ladder rack lower	3
Rack positions			6 lower
APPEARANCE			
Color appearance	SS	SS TS ES WW, BB	SS BB
Frameless oven doors	SS	SS TS ES CM glass	SS CM glass
Oven door with window	Big view	Big view	Big view
Handle color*	SS	SS TS ES CM high-gloss	SS CM high-gloss
Handle design	Designer-style	Designer-style	Designer-style
Oven interior	Black	Black	Black
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.)	235	230	225
Oven cabinet width required (in.)	30	30	30
Overall dimensions, including handle (WxHxD in inches)	29-3/4 x 43-3/8 x 26-3/4	29-3/4 x 43-3/8 x 26-3/4	29-3/4 x 43-3/8 x 26-3/4
Overall oven interior dimensions (WxHxD in inches)	Upper Lower	Upper Lower	Upper Lower
	20-1/16 x 8-1/2 x 17 25 x 17-3/8 x 20-1/4	20-1/16 x 8-1/2 x 17 25 x 17-3/8 x 20-1/4	20-1/16 x 8-1/2 x 17 25 x 17-3/8 x 20-1/4
POWER/RATINGS			
KW rating @	240V 208V	7.6 5.7	6.8 5.1
Amps @	240V 208V	30 30	30 30
Convection wattage	2,400	2,400	
Microwave wattage	1,000	1,000	1,000
Broiler wattage	3,400	3,400	3,400
Bake wattage	2,850	2,850	2,850

\*SS = Stainless, TS = Black Stainless, ES = Slate, WW = White on white, BB = Black on black, CM = Color-matched.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" BUILT-IN COMBINATION DOUBLE  
OVEN DIMENSIONS (IN INCHES)  
MODELS PT9800, PT7800, JT3800

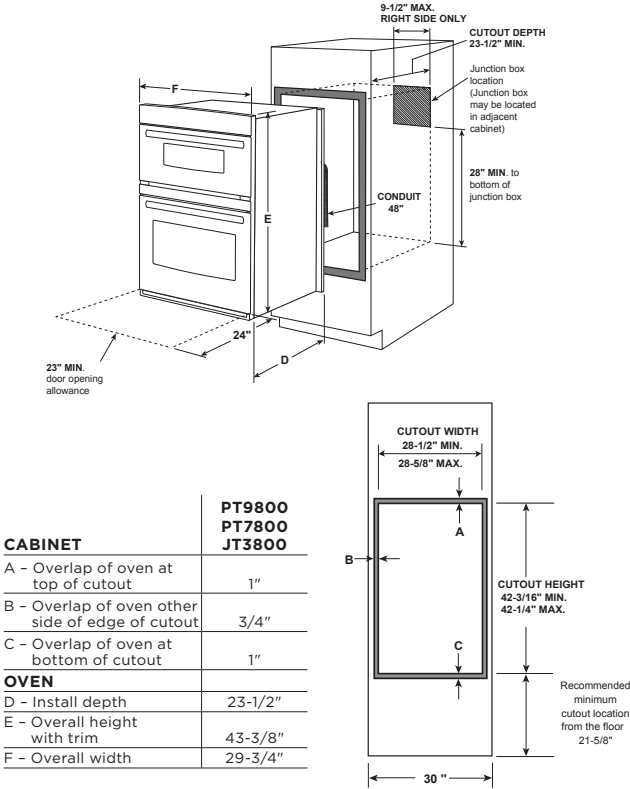


CABINET	PT9800 PT7800 JT3800
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	3/4"
C - Overlap of oven at bottom of cutout	1"
OVEN	
D - Install depth	23-1/2"
E - Overall height with trim	43-3/8"
F - Overall width	29-3/4"

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

OVEN SUPPORT FOR 30" COMBINATION  
DOUBLE OVEN MODELS

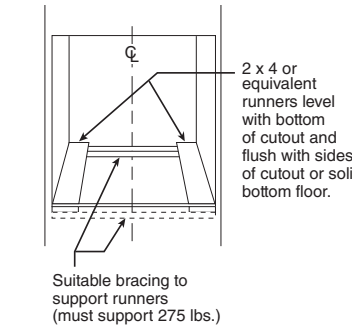

Most 30" wall cabinets can be used with this unit. The opening between the inside walls must be at least 28-1/2" wide.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

See page 226 for warranty information.

geappliances.com 249



27" BUILT-IN COMBINATION DOUBLE OVENS


	GE PROFILE™	GE
	PK7800SK PK7800EK	JK3800SH JK3800DH
FEATURES & CONTROLS		
Capacity (cu. ft.)	1.7/4.3	1.7/4.3
Oven	Upper Convection Microwave	Lower Microwave
Self-clean oven with Steam Clean option	Lower	Traditional
Delay clean option	Variable	Variable
Microwave oven	Upper	Upper
Microwave cooking timer	●	●
Convection bake	●	
Microwave power levels	10	10
Sensor functions	Upper	Upper
Microwave oven power output watts	1,000	1,000
16" turntable	●	●
Thermal Bake	Lower	Lower
Thermal Broil	Lower	Lower
Ten-pass bake element	Lower	Lower
Eight-pass broil element	Lower	Lower
Control type	Dial & Glass touch	Dial & Glass touch
Warm mode	Lower	Lower
Temperature display	Lower	Lower
Delay bake option	Lower	Lower
°C and °F programmable	Lower	Lower
Audible preheat signal	Lower	Lower
Auto oven shut-off with override	Lower	Lower
Electronic clock and kitchen timer	Lower	Lower
Control lock capability	Lower	Lower
Certified Sabbath mode	Lower	Lower
Halogen interior oven light	Lower	Lower
Self-clean oven racks	Lower	Lower
Oven racks	2, 1 roller	3 heavy-duty
Rack positions	6-ladder rack lower	6 lower
APPEARANCE		
Color appearance*	SS ES	SS WW, BB
Frameless oven doors	SS CM glass	SS CM glass
Oven door with window	Big view	Big view
Handle color*	SS	SS
Handle design	Designer-style	Designer-style
Oven interior	Black	Black
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)	192	192
Oven cabinet widthrequired (in.)	27	27
Overall dimensions, including handle (WxHxD in inches)	26-3/4 x 42-3/8 x 26-7/8	26-3/4 x 42-3/8 x 26-7/8
Overall oven interior dimens. (WxHxD in inches)	Upper 20-1/16 x 8-1/2 x 17	20-1/16 x 8-1/2 x 17
Lower	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20
POWER/RATINGS		
KW rating @	240V 208V	6.8 5.1
Amps @	240V 208V	30 30
Convection wattage	2,400	
Broiler wattage	3,400	3,400
Bake wattage	2,600	2,600
Microwave wattage	1,000	1,000

\*SS = Stainless, ES = Slate, WW = White on white, BB = Black on black, CM = Color-matched.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

27" BUILT-IN COMBINATION DOUBLE OVEN DIMENSIONS (IN INCHES) MODELS PK7800, JK3800

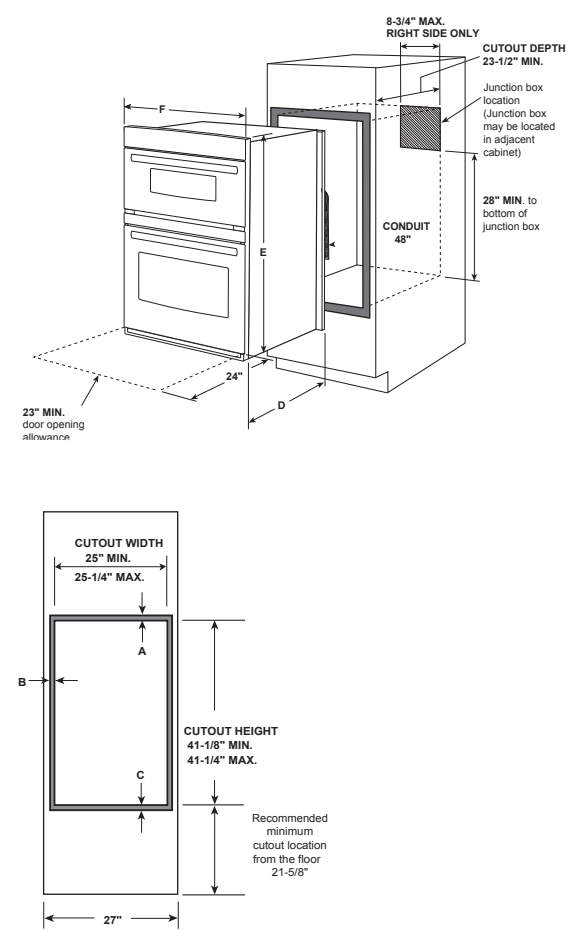


**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

OVEN SUPPORT FOR 27" COMBINATION DOUBLE OVEN MODELS

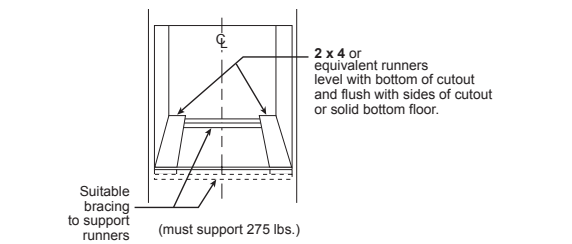

30" BUILT-IN SINGLE OVENS

	GE PROFILE			GE	
	PTS9000SN PTS9000BN	PTS7000SN PTS7000BN	PTS700LSN PTS700RSN	JTS5000SN JTS5000EN JTS5000FN JTS5000DN	JTS3000SN JTS3000EN JTS3000DN
UFAS/ADA compliant	●	●		●	●
FEATURES & CONTROLS					
Total oven capacity (cu. ft.)	5.0	5.0	5.0	5.0	5.0
Oven cooking technology	Convection	Convection	Convection	Convection	Traditional
Self-clean oven with Steam Clean option	●	●	●	●	●
Delay clean option	Variable	Variable	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●	●	●
True European Convection	●	●	●	●	
Direct Air	●	●	●		
Convection Bake multi/single rack	●	●	●		
Convection Roast	●	●	●	●	
Convection Broil	●	●	●		
Convection Bake				●	
Thermal Bake	●	●	●	●	●
Thermal Broil	●	●	●	●	●
Precision Cooking	●	●	●		
In-oven camera	●				
Ten-pass bake element	●	●	●	●	●
Ten-pass dual broil element	●	●	●		
Eight-pass broil element				●	●
Hidden bake oven interior	●	●	●	●	●
Control type	7" full-color LCD touch screen	7" full-color LCD touch screen	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●	●	●	●	●
Scan-to-Cook technology	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	●
Proof mode	●	●	●	●	●
Oven meat probe	●	●	●	●	
Warm mode	●	●	●	●	●
Temperature display	●	●	●	●	●
Delay bake option	●	●	●	●	●
°C and °F programmable	●	●	●	●	●
Audible preheat signal	●	●	●	●	●
Auto oven shut-off with override	●	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●	●
Control lock capability	●	●	●	●	●
Halogen interior oven lighting	●	●	●	●	●
Certified Sabbath mode	●	●	●	●	●
Never-Scrub oven racks	●	●	●	●	●
Heavy-duty oven racks	2 roller rack	1, 1 roller rack	1, 1 roller rack	1, 1 roller rack	2
Rack positions	6 embossed	6 embossed	3 embossed	6 embossed	6 embossed
APPEARANCE					
Color appearance*	SS TS	SS TS	SS SS	SS ES DS WW, BB	SS ES WW, BB
Handle color*	SS BB	SS TS DS	SS SS	SS ES DS WW, BB	SS ES WW, BB
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Door swing			Left-swing Right-swing		
Oven interior	Black gloss	Black gloss	Black gloss	Black gloss	Black gloss
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	177	151	177	151	136
Oven cabinet width required (in.)	30	30	30	30	30
Overall dimensions, including handle (WxHxD in inches)	29-3/4 x 28-3/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4
Overall oven interior dimensions (WxHxD in inches)	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4
POWER/RATINGS					
KW rating @	240V 208V	4.2 3.2	4.2 3.2	4.2 3.2	4.2 3.2
Amps @	240V 208V	20 20	20 20	20 20	20 20
Convection wattage	2,400	2,400	2,400	2,400	
Broiler wattage	4,300	4,300	4,300	4,000	4,000
Bake wattage	2,850	2,850	2,850	2,850	2,850

\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black.



Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.


Note: See following page for installation drawings.



30" BUILT-IN SINGLE OVENS

30" BUILT-IN SINGLE OVEN DIMENSIONS (IN INCHES)


MODELS PTS9000, PTS7000, JTS5000, JTS3000

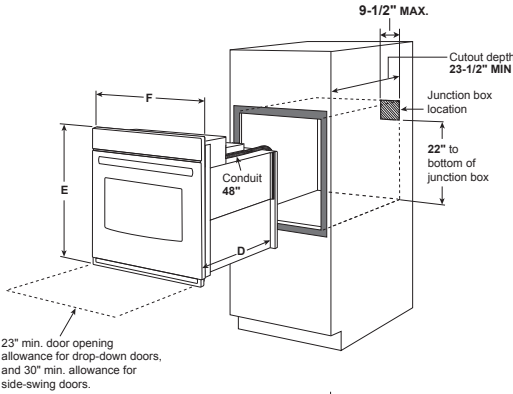

OVEN	PTS7000, JTS5000, JTS3000
D - Install depth	23-1/2"
E - Overall height with trim	28-5/8"
F - Overall width	29-3/4"

30" BUILT-IN TWIN FLEX OVEN DIMENSIONS (IN INCHES)

MODELS PT9200, PTS9200

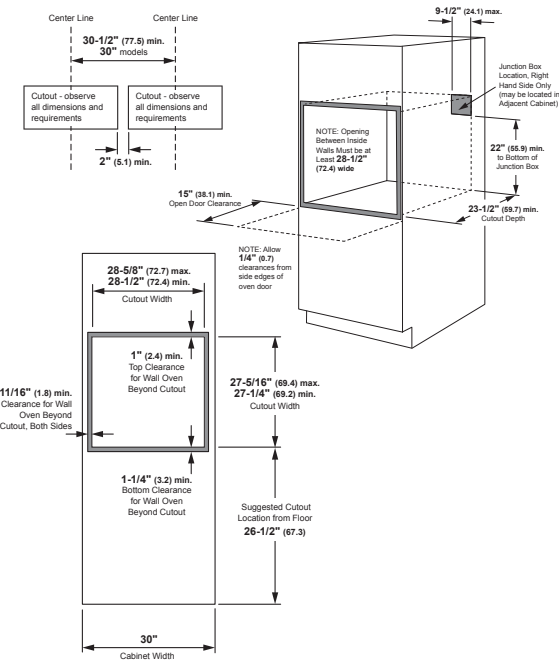

**Note:** Gas, electronic touch and electric coil cooktops cannot be installed over the PT9200 due to the top of the oven preventing the cooktop from fitting into place.


**Most 30" wall cabinets can be used with this unit.**

**Note:** These ovens are not approved for stackable installation.


**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.  
**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

MODEL PTS700L

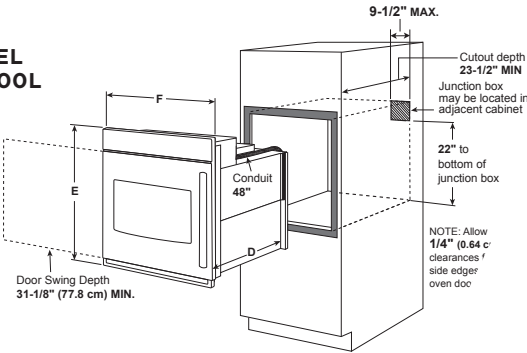

MODEL PTS700R

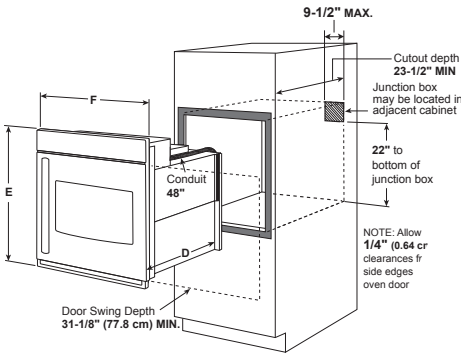


UNDERCOUNTER INSTALLATION DIMENSIONS (IN INCHES)



MODELS PTS7000, PTS9000, JTS5000, JTS3000

**Note:** 36" ribbon cooktops are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.  
**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.  
**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data and for alternate installation options.

OVEN SUPPORT FOR 30" SINGLE OVEN MODELS

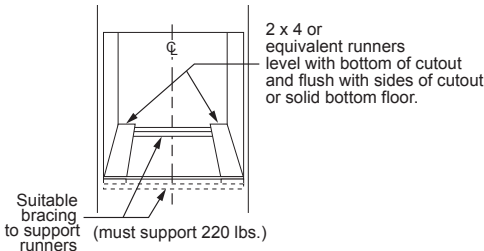

**IMPORTANT:** Maintain a minimum distance of 31-1/4" from the top surface of the countertop to the wall oven platform to ensure that the cooktop and wall oven do not interfere with each other (see picture).

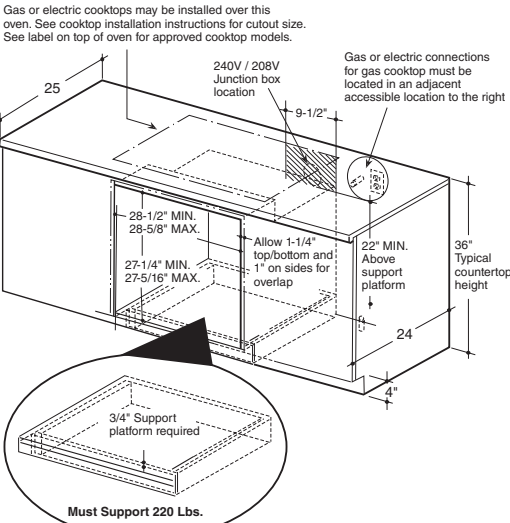

27" BUILT-IN SINGLE OVENS

	GE PROFILE™	GE
	PKS7000SN PKS7000BN	JKS5000SN JKS5000EN JKS5000DN JKS3000SN JKS3000DN

UFAS/ADA compliant	●	●	●
<b>FEATURES &amp; CONTROLS</b>			
Total oven capacity (cu. ft.)	4.3	4.3	4.3
Oven cooking technology	Convection	Convection	Traditional
Self-clean oven with Steam Clean option	●	●	●
Delay clean option	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●
True European Convection	●	●	
Convection Bake multi/single rack	●		
Convection Roast	●	●	
Convection Bake	●	●	
Thermal Bake	●	●	●
Thermal Broil	●	●	●
Ten-pass bake element	●	●	●
Eight-pass broil element	●	●	●
Hidden bake oven interior	●	●	●

Control type	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●	●	●
Scan-to-Cook technology	●	●	●
Auto Recipe Conversion	●	●	
Proof mode	●	●	●
Oven meat probe	●	●	
Warm mode	●	●	●
Temperature display	●	●	●
Delay bake option	●	●	●
°C and °F programmable	●	●	●
Audible preheat signal	●	●	●
Auto oven shut-off with override	●	●	●
Electronic clock and kitchen timer	●	●	●
Control lock capability	●	●	●
Halogen interior oven lighting	●	●	●
Certified Sabbath mode	●	●	●
Never-Scrub oven racks	●	●	●
Heavy-duty oven racks	1, 1 roller rack	1, 1 roller rack	2
Rack positions	6 embossed	6 embossed	6 embossed

<b>APPEARANCE</b>			
Color appearance*	SS TS	SS ES WW, BB	SS WW, BB

Handle color*	SS TS	SS ES WW, BB	SS WW, BB
Handle design	Designer-style	Designer-style	Designer-style
Oven interior	Black gloss	Black gloss	Black gloss

<b>WEIGHTS &amp; DIMENSIONS</b>			
Approx. shipping wt. (lbs.)	134	134	128
Oven cabinet width required (in.)	27	27	27
Overall dimensions, including handle (WxHxD in inches)	26-3/4 x 28-3/4 x 26-5/8	26-3/4 x 28-3/4 x 26-5/8	26-3/4 x 28-3/4 x 26-5/8
Overall oven interior dimensions (WxHxD in inches)	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20

<b>POWER/RATINGS</b>			
240V	3.6	3.6	3.6
KW rating @ 208V	2.7	2.7	2.7
240V	20	20	20
208V	20	20	20
Amps @ 208V	20	20	20
Convection wattage	2,400	2,400	
Broiler wattage	3,400	3,400	3,400
Bake wattage	2,600	2,600	2,600


\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black.

**Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.**

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


27" BUILT-IN SINGLE OVEN DIMENSIONS (IN INCHES)

MODELS PKS7000, JKS5000, JKS3000

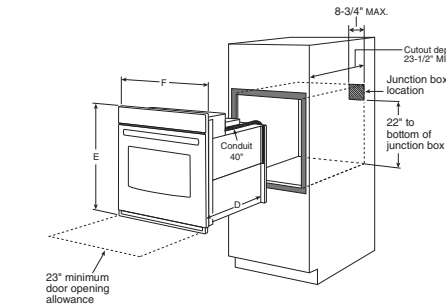

CABINET	PKS7000, JKS5000, JKS3000
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	1"
C - Overlap of oven at bottom of cutout	1"
<b>OVEN</b>	
D - Overall depth	23-1/2"
E - Overall height with trim	28-7/8"
F - Overall width	26-3/4"


OVEN SUPPORT FOR 27" SINGLE OVEN MODELS



**Note:** These ovens are not approved for stackable installations.

UNDERCOUNTER INSTALLATION DIMENSIONS (IN INCHES)

MODELS PKS7000, JKS5000, JKS3000

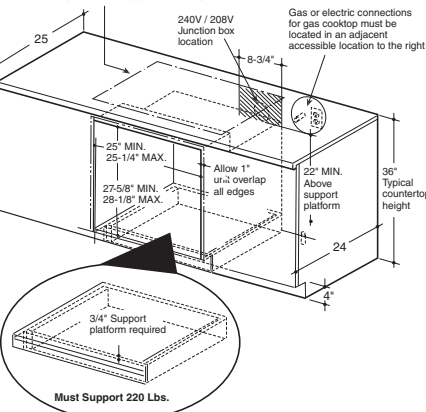

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.  
**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.  
**Note:** For 27" built-in single ovens, if marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.


**Note:** 36" ribbon cooktops are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.  
**Note:** Oven is rated for use only under GE 30" standard or sealed burner gas and selected GE 30" smoothtop and Calrod® electric cooktops.  
**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.



## 24" BUILT-IN SINGLE OVENS

	GE	
	JRP20SK JRP20WJ JRP20BJ	JRS06SK JRS06BJ
<b>FEATURES &amp; CONTROLS</b>		
Capacity (cu. ft.)	2.7	2.7
Oven	Self-clean	Standard-clean
Cleaning time	Variable	
Self-clean oven with delay clean option	●	
Automatic self-clean oven door lock	●	
Variable broil/Four-pass broil	●	●
Control type	Electronic touch	Electronic touch
Temperature display	●	●
Delay bake option	●	●
°C and °F programmable	●	●
Audible preheat signal	●	●
Auto oven shut-off with override	●	●
Electronic clock and kitchen timer	●	●
Control lock capability	●	
Oven light	●	●
Certified Sabbath mode	●	●
Oven racks	2	2
Rack positions	4	4
<b>APPEARANCE</b>		
Color appearance*	SS WW BB	SS BB
Frameless oven doors	SS CM glass	SS CM glass
Oven door with window	Clear view	Clear view
Handle color*	SS CM	SS CM
Handle design	D-shaped	D-shaped
<b>WEIGHTS &amp; DIMENSIONS</b>		
Approx. shipping weight (lbs.)	114	82
Oven cabinet width required (in.)	24	24
Overall dimensions (WxHxD in inches)	23-3/4 x 28-3/16 x 23-1/8	23-3/4 x 28-3/16 x 23-1/8
Overall oven interior dimensions (WxHxD in inches)	17 x 15 x 18-1/2	17 x 15 x 18-1/2
<b>POWER/RATINGS</b>		
	240V	3.4
KW rating @	208V	2.6
	240V	20
Amps @	208V	20
Broiler wattage	3,400	3,400
Bake wattage	2,650	2,000


**24" BUILT-IN SINGLE OVEN  
DIMENSIONS (IN INCHES)  
MODEL JRS06**

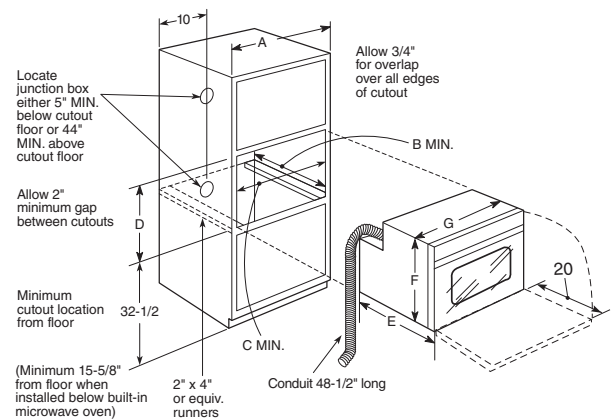


<b>CABINET</b>		<b>JRS06</b>
A—Cabinet width required		24" min.
B—Minimum cabinet depth		23-1/2"
C—Opening width		22-1/2"
D—Opening height		27-5/8" min.
<b>OVEN</b>		
	without handle	23-1/8"
E—Install depth	with handle	28-1/8"
	without trim	27-1/2"
F—Overall height with trim		28-1/4"
G—Overall width		23-3/4"

**254** See page 226 for warranty information.


**24" BUILT-IN SINGLE OVEN**  
**DIMENSIONS (IN INCHES)**  
**MODEL JR20P**

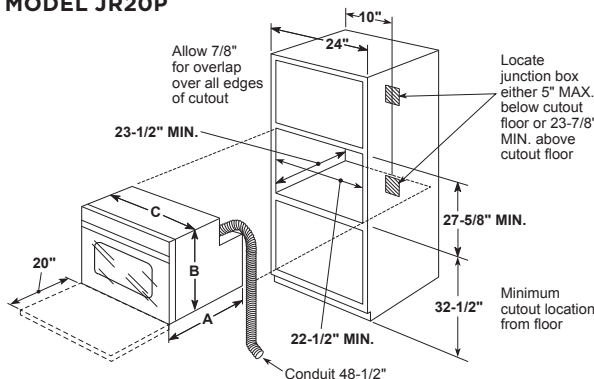

## OVEN SUPPORT FOR 24" SINGLE ELECTRIC OVEN MODELS JRP20 AND JRP06

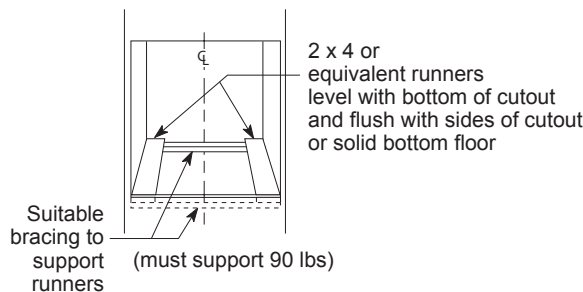

## OVEN SUPPORT FOR 24" GAS OVEN MODELS

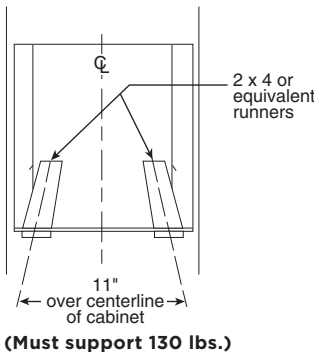

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.


Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

## 24" BUILT-IN GAS OVENS

	<b>GE</b> <b>JGRP20SEN</b> <b>JGRP20WEJ</b> <b>JGRP20BEJ</b>
<b>FEATURES &amp; CONTROLS</b>	
Oven capacity (cu. ft.)	2.7
Oven interior	Self-clean
Automatic self-clean oven door lock	●
Delay clean option	●
In-oven broiling	●
Storage drawer	●
Electronic controls	●
Temperature display	●
Start pad	●
Delay bake option with cook & hold	●
°C and °F programmable	●
Audible preheat signal	●
Auto oven shut-off with override	●
Electronic clock and kitchen timer	●
Control lock capability	●
Oven light pad	●
Oven racks	2
Electronic pilotless ignition	●
<b>APPEARANCE</b>	
	SS WW BB
Color appearance*	
	SS CM glass CM glass
Frameless oven door	●
Oven door with window	
	SS CM high gloss CM high gloss
Handle color*	
Design	D-shaped
<b>WEIGHTS &amp; DIMENSIONS</b>	
Approx. shipping wt. (lbs.)	152
Oven cabinet width required (in.)	24
Overall dimensions (WxHxD in inches)	23-3/4 x 38-3/4 x 25-3/8
Overall oven interior dimensions (WxHxD in inches)	17 x 15 x 18-7/8
<b>POWER/RATINGS</b>	
Gas oven electrical rating	120V, 60Hz, 15A
Broiler/Bake wattage (000s BTUs)	
Natural Gas/LP Gas**	13.0/13.0

\*SS = Stainless, WW = White on white, BB = Black on black,  
CM = Color-matched.  
\*\*Factory set for natural gas. A set of LP orifices is included with each oven for LP conversion.

**24" BUILT-IN GAS OVEN**  
**DIMENSIONS (IN INCHES)**

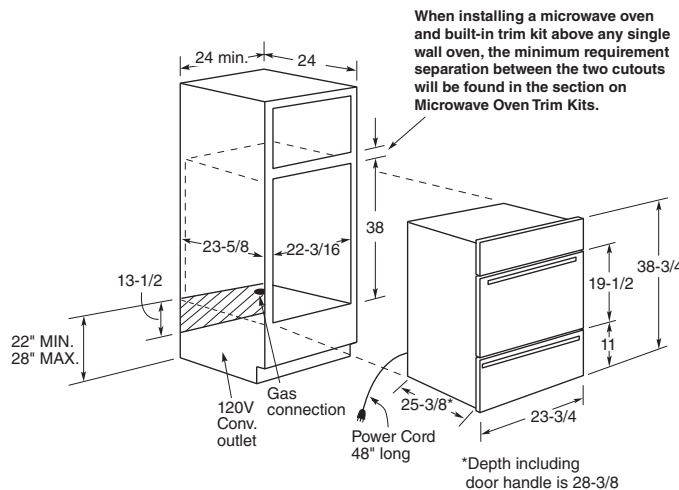

**Note: These ovens are not approved for stackable or side-by-side installations.**

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.



Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

## 30" BUILT-IN TWIN FLEX WALL OVEN

		GE PROFILE™
		PTS9200SN
ADA compliant		●
FEATURES & CONTROLS		
Oven capacity (cu. ft.)		2.2/2.8 (5.0 total)
Oven cooking technology	Upper Traditional Lower Convection	
Self-clean oven with Steam Clean option		●
Delay clean option		Variable
Automatic self-clean oven door lock		●
True European Convection with Precise Air		●
Convection Roast		Lower
Convection Broil		Lower
Convection Bake		Lower
Thermal Bake		●
Thermal Broil		●
8-pass bake element		●
8-pass dual broil element		Lower
6-pass dual broil element		Upper
Hidden bake oven interior		●
Control type		7" full-color LCD touch screen
WiFi Connect		●
Scan-to-Cook technology		●
Auto Recipe Conversion		Lower
Proof mode		Lower
Oven meat probe		Lower
Warm mode		●
Temperature display		●
Delay bake option		●
°C and °F programmable		●
Audible preheat signal		●
Auto oven shut-off with override		●
Electronic clock and kitchen timer		●
Control lock capability		●
Halogen interior lighting		●
Certified Sabbath mode		●
Never-scrub oven racks		●
Heavy-duty oven racks		1, 2 roller racks 5 embossed (2 upper / 3 lower)
Rack positions		
APPEARANCE		
Color appearance*		SS
Handle color*		SS
Handle design		Designer-style
Oven interior		Black gloss
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)		212
Oven cabinet width required (in.)		30
Overall dimensions, including handle (WxHxD in inches)		29-3/4 x 27-13/16 x 23-5/16
Overall oven interior (WxHxD in inches)	Upper 24 x 8-3/4 x 17-7/8 Lower 24 x 12-1/2 x 16	
POWER/RATINGS		
	240V	4.0
KW rating @	208V	3.0
	240V	20
Amps @	208V	20
Convection wattage		1,300
	Upper	2,720
Broiler wattage	Lower	2,950
	Upper	1,700
Bake wattage	Lower	2,200

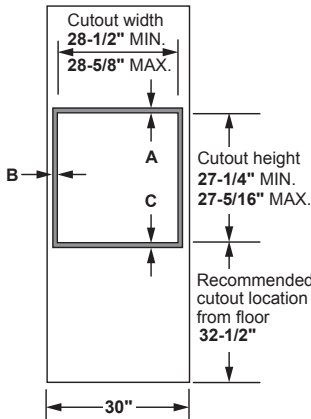

See page 226 for warranty information.

geappliances.com 255




30" AND 27" BUILT-IN WARMING DRAWERS\*

	GE PROFILE™	
	PTW9000SP	PKW7000SP
UFAS/ADA compliant**	●	●
FEATURES & CONTROLS		
Capacity (cubic feet)	1.9	1.67
Control location	Hidden	Hidden
Operation	On/Off rocker switch	On/Off rocker switch
Indicator light	“On”	“On”
Temperature control	Rotary knob	Rotary knob
Proof temperature (°F)	75-95	75-95
Low temperature (°F)	140-160	140-160
Medium temperature (°F)	160-195	160-195
High temperature (°F)	195-230	195-230
Variable-humidity control	Crisp/Moist	Crisp/Moist
Rack configuration	Half rack	Half rack
Drawer glide	Full-extension, ball-bearing glides	Full-extension, ball-bearing glides
APPEARANCE		
Color appearance***	SS	SS
Drawer front****	SS	SS
Handle color***	SS	SS
Handle design	Designer-style	Designer-style
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	65	59
Net weight (lbs.)	59	53
Cabinet width compatibility (in.)	30	27
Interior dimensions (WxHxD in inches)	23-7/8 x 6-1/4 x 22-1/16	20-7/8 x 6-1/4 x 22-1/16
Exterior dimensions (WxHxD in inches)	29-3/4 x 10-1/2 x 23-3/4	26-3/4 x 10-1/2 x 23-3/4
Cutout dimensions (WxHxD in inches)	28-1/2 x 9-1/4 x 23-1/2	25-1/2 x 9-1/4 x 23-1/2
POWER/RATINGS		
Amp rating @ 120V/60Hz	15	15
Element power (watts)	450	450
Power cord length (in.)	56	56
Outlet type	3-prong grounded	3-prong grounded
ACCESSORIES		
Custom panel kit****	ZXD30B	

\*See page 71 for match recommendations.  
\*\*ADA-compliant when installed so the bottom of the drawer is 15"-38" from the floor.  
\*\*\*SS = Stainless.  
\*\*\*\*Custom panel will not be flush with adjacent cabinetry drawers and doors.





UNDERCOUNTER INSTALLATION DIMENSIONS (IN INCHES)  
MODELS PTW9000, AND PKW7000

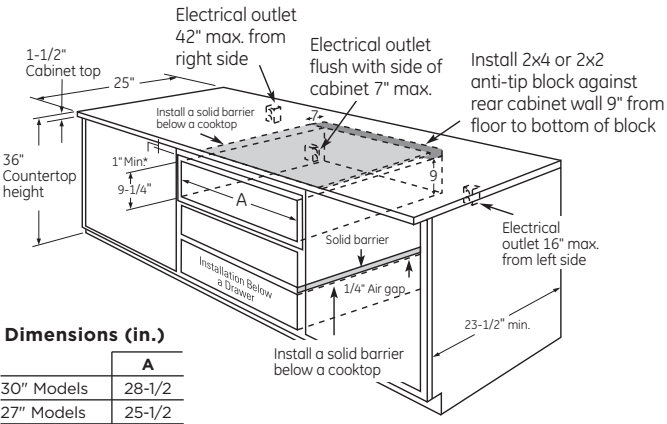

**Note:** When installing the warming drawer below a cooktop, a solid barrier must be installed at least 1" from the lowest point of the bottom of cooktop burner box to the top of the cutout. Use any solid material such as 1/4"-thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer. See label on top of the warming drawer for approved cooktop models.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.  
**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.  
**Note:** Use of drawer with ZXD30B custom panel kit will result in the panel not being flush with adjacent cabinet doors and drawers.

INSTALLATION BELOW A SINGLE OR DOUBLE WALL OVEN (IN INCHES)  
MODELS PTW9000, PW9000, PKW7000 AND PJ7000

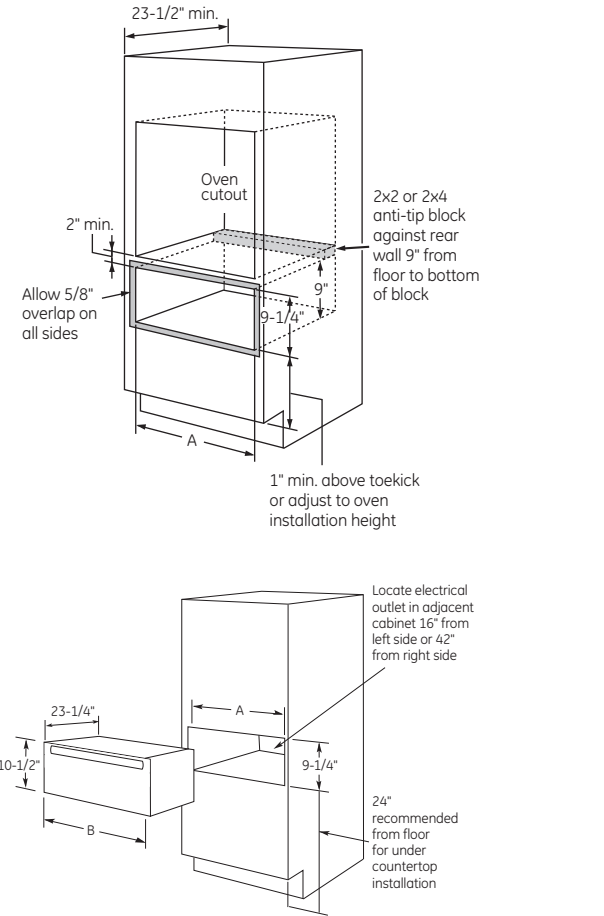

**When installed under a cooktop:**  
Warming drawers are suitable for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer for suitable models. A solid barrier and air gap between cooktop and warming drawer are required.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" AND 27" BUILT-IN ADVANTIUM® WALL OVENS


	GE PROFILE		
	PSB9240SF PSB9240BL PSB9240EF	PSB9120SF PSB9120BL PSB9120EF	PSB9100SF PSB9100BL PSB9100EF
UL Certified	●	●	●
FEATURES & CONTROLS			
Family-size oven	1.7 cu. ft.	1.7 cu. ft.	1.7 cu. ft.
Stainless steel oven interior	●	●	●
Cooking modes	Speedcook Convection oven Microwave oven Warming Proofing True European Convection	up to 8 times 250°-450° ● ● ● Multilevel	up to 4 times 250°-450° ● ● ● Multilevel
Oven controls	Electronic scrolling display Preprogrammed menu items Help pad Demo mode Interior oven light Beeper sound level control Variable scroll speed	● 175 ● ● ● 4 levels 5 speeds	● 175 ● ● ● 4 levels 5 speeds
Heating elements	Upper heater power (watts) Lower heater power (watts) Convection heater power (watts)	2,400 375 1,500	1,200 375 1,500
Custom recipe saver	30	30	30
Cooking Complete reminder	●	●	●
Control lockout	●	●	●
Frameless glass oven door with window	●	●	●
Microwave oven features	Sensor Defrost—Auto/ Time/ 1-lb. Quick Soften/Melt Microwave power output watts	● ● ● ● 950	● ● ● ● 975
27"/30" appearance	30"	30"	27"
Under-the-counter installation	●	●	●
APPEARANCE			
Color appearance*	SS TS ES	SS TS ES	SS TS ES
Handle color*	SS TS SS	SS TS SS	SS TS SS
Handle design	Designer-style	Designer-style	Designer-style
WEIGHTS & DIMENSIONS			
Overall oven interior dimensions (WxHxD in inches)	20-1/8 x 8-1/2 x 17	20-1/8 x 8-1/2 x 17	20-1/8 x 8-1/2 x 17
Overall dimensions	Exterior width (W) Exterior height (H) Exterior depth, not including handle (D)	29-3/4 19 21-1/2	26-3/4 19 21-1/2
Oven cabinet width required (in.)	30	30	27" minimum
Cutout height	17-1/2	17-1/2	17-1/2
Cutout width	25-1/4	25-1/4	25-1/4
Cutout depth	23-1/2	23-1/2	23-1/2
Approx. shipping weight (lbs.)	115	115	91
POWER/RATINGS			
Input volt/hertz	240V/208V 60Hz	120V/60Hz	120V/60Hz
Input amps/watts (max)	30A/6.3KW-total	15A/1.8KW	15A/1.8KW
ACCESSORIES			
Cookbook	●	●	●
Cooking guide	●	●	●
Grill tray	●	●	●
Cooking tray	●	●	●
Microwave tray	●	●	●
Rack	Full-width	Pedestal	Pedestal
Broil/Toast tray	●	●	●
Storage drawer	UXB903SNS Optional	UXB903SNS Optional	N/A
WARRANTY			
Limited one-year in-home warranty**	●	●	●
Limited five-year magnetron warranty**	●	●	●

\*SS = Stainless, TS = Black Stainless, ES = Slate, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*See written warranty for details.




Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

DIMENSIONS AND CABINET INSTALLATION (IN INCHES)

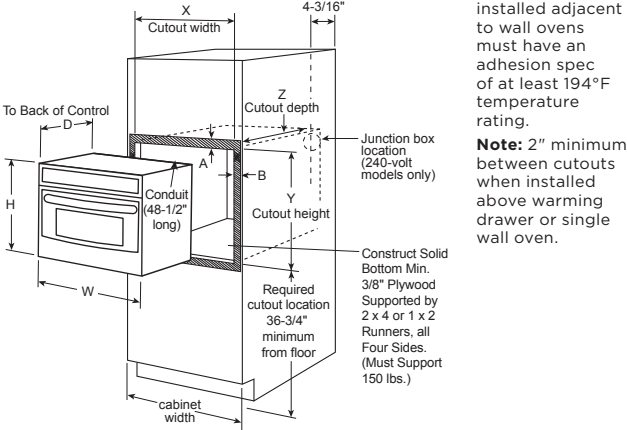


A = Allow clearance of 5/8" from the top and 1-1/8" from the bottom.  
B = Allow clearance of 2-3/8" from the sides on 30" product and 7/8" for 27" product.  
Required for UL\* approval on models PSB9240 and PSB9100  
**Note:** PSB9120 may be installed at a minimum of 5" from the floor.

DIMENSIONS AND CABINET INSTALLATION (IN INCHES)

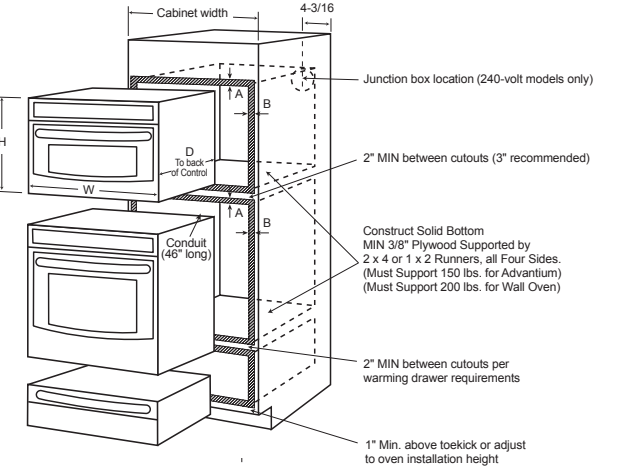

A = Allow clearance of 5/8" from the top and 1-1/8" from the bottom.  
B = Allow clearance of 2-3/8" from the sides on 30" product and 7/8" for 27" product.



240-volt electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.  
**Important:** Before installing, consult installation instructions packed with product for current dimensional data.  
**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

	CABINET WIDTH	W WIDTH	H HEIGHT	D DEPTH (TO BACK OF CONTROL)	X CUTOUT WIDTH	Y CUTOUT HEIGHT	Z CUTOUT DEPTH
PSB9240 and PSB9120 <b>without</b> storage drawer	30"	29-3/4"	19"	21-1/2"	25-1/4"	17-1/2"	23-1/2"
PSB9240 and PSB9120 <b>with</b> storage drawer	30"	29-3/4"	22-1/4"	21-1/2"	25-1/4" min. to 28-1/2" max.	21"	23-1/2"
PSB9100	27"	26-3/4"	19"	21-1/2"	25-1/4"	17-1/2"	23-1/2"

**Note:** See wall oven and warming drawer section for complete product and cutout dimensions.




30" BUILT-IN MICROWAVE/CONVECTION OVEN

		GE PROFILE™
		PWB7030SL PWB7030EL
FEATURES & CONTROLS		
Family-size oven		1.7 cu. ft.
Control type		Glass touch
Cooking technology		Convection
Microwave watts (IEC-705)		975
Power levels		10
Convection cooking controls	Combination Fast Cook	●
	Convection Bake/Broil	●
	Warm/Proof	●
	Auto Cook	●
Sensor controls	Popcorn	●
	Steam Cook	●
	Time Cook	●
Convenience controls	Defrost Weight/Time	●
		● (My Cycle)
Add 30 Seconds		●
Control lockout		●
Timer on/off		●
Cooking Complete reminder		●
Demo mode		●
Microwave oven interior		Stainless steel
Electronic digital display with clock		●
Interior lighting		Halogen
Oven racks		Pedestal
Turntable		●
Turntable diameter (in.)		16
APPEARANCE		
Color appearance*		SS ES
Handle		●
WEIGHTS & DIMENSIONS		
Overall oven interior dimensions (WxHxD in inches)		20-1/16 x 8-1/2 x 17
Approx. shipping weight (lbs.)		100
POWER/RATINGS		
Input Volts/Hertz		120V/60Hz
Input Amps/Watts (max.)		14.0/1,600
*SS = Stainless, ES = Slate.		

30" BUILT-IN MICROWAVE/CONVECTION OVEN DIMENSIONS (IN INCHES)

MODEL PWB7030

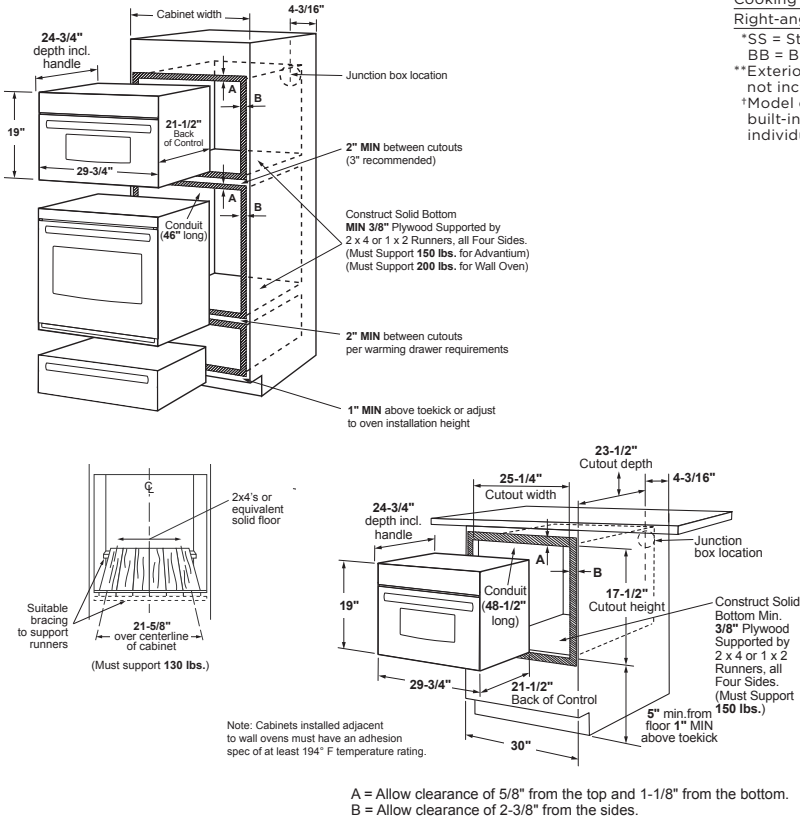

BUILT-IN MICROWAVE OVEN

		GE PROFILE
		PEB7227
UFAS/ADA compliant†		●/●
CAPACITY		
Oven cavity (cu. ft.)		2.2
FEATURES		
Watts (IEC-705 test procedure)		1,100
Electronic touch controls		●
Scrolling display with Help pad		●
Demo mode		●
Electronic digital display with clock		●
Display On/Off		●
	Popcorn	●
	Beverage	●
	Reheat	●
	Vegetable	●
Sensor controls		●
Express Cook		1-6 min.
Instant On controls		●
Time Cook		I & II
Add 30 Seconds		●
Weight/Time Defrost		●
Power levels		10
Turntable		Recessed
Turntable diameter (in.)		16-1/2
Timer on/off		●
Cooking Complete reminder		●
Control lockout		●
APPEARANCE		
		SS TS ES DS
Color appearance*		WW, BB
		Gray Gray Gray Gray CM
Case color*		
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)		51
Dimensions (WxHxD in inches)		17-5/16 x 11-1/16 x 19-1/16
Cavity		
Exterior**		24-1/8 x 14 x 19-3/4
POWER/RATINGS		
Input Volt/Hz		120/60
Electric input		Watts 1,650
@ 120V		Amperage 13.9
ACCESSORIES		
Cooking guide label		●
Right-angle plug		●

\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*Exterior dimensions: height includes feet, depth does not include handle.  
†Model can be UFAS/ADA compliant in countertop or built-in configuration. For built-in, please see information for individual model.

BUILT-IN TRIM KIT FOR 2.2 MICROWAVE OVENS

These trim kits allow for built-in installation of the 2.2 microwave oven in a wall or cabinet alone, or over a Profile 30" or 27" single electric wall oven. Do not install microwave lower than 36" above the floor.


30" TRIM KITS FOR MODEL PEB7227

MODEL	Z	30" DELUXE TRIM KIT
PEB7227ANDD	29-3/4"	JX7230SLSS - Stainless
PEB7227ANDD	29-3/4"	JX7230BLTS - Black Stainless
PEB7227ANDD	29-3/4"	JX7230ELES - Slate
PEB7227ANDD	29-3/4"	JX7230FMDS - Black Slate
PEB7227DLWW	29-3/4"	JX7230DLWW - White
PEB7227DLBB	29-3/4"	JX7230DLBB - Black

27" TRIM KITS FOR MODEL PEB7227

MODEL	Z	27" DELUXE TRIM KIT
PEB7227ANDD	26-3/4"	JX7227SLSS - Stainless
PEB7227ANDD	26-3/4"	JX7227BLTS - Black Stainless
PEB7227ANDD	26-3/4"	JX7227ELES - Slate
PEB7227ANDD	26-3/4"	JX7227FMDS - Black Slate
PEB7227DLWW	26-3/4"	JX7227DLWW - White
PEB7227DLBB	26-3/4"	JX7227DLBB - Black

CUTOUT DIMENSIONS  
MODEL PEB7227

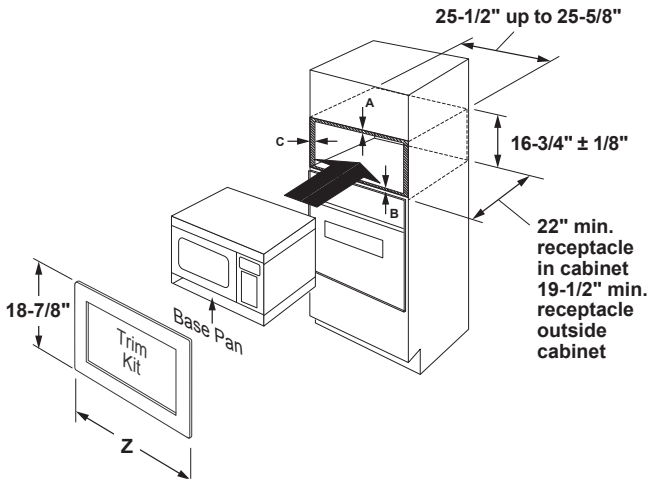

Cabinet overlap requirements	30"	27"
A - Overlap of trim kit over top of cabinet	1"	1"
B - Overlap of trim kit over bottom of cabinet	1-1/8"	1-1/8"
C - Overlap of trim kit over sides of cabinet	2-1/8"	5/8"

Note:  
Allow an additional inch of clearance beyond trim frame on all sides

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


MICROWAVE OVEN

		GE PROFILE
		CONVECTION
		PEB9159SJ PEB9159EJ PEB9159DJ
UFAS/ADA compliant†		●/●
California Prop 65		●
CAPACITY		
Oven cavity (cu. ft.)		1.5
FEATURES		
Watts (IEC-705 test procedure)		1,000
Electronic touch controls		●
Scrolling display with Help pad		●
Electronic digital display with clock		●
Display On/Off		●
Convection controls	Convection	●
	Combination (Conv/MWO)	●
	Popcorn	●
	Beverage	●
Sensor controls	Reheat	●
	Cook	●
Express Cook		1-6 min.
Instant On controls		●
Time Cook		I & II
Add 30 Seconds		●
Auto/Time Defrost		●
Power levels		10
Turntable		Recessed
Turntable diameter (in.)		13-1/2
Timer on/off		●
Cooking complete reminder		●
Control lockout		●
CONTROLS TOUCHPAD		
Add 30 seconds		●
Broil		●
Convection bake		●
Convection roast		●
Cook time		●
Mute On/Off		●
APPEARANCE		
		SS ES
Color appearance*		WW, BB
		Gray Gray CM
Case color*		
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)		44
Dimensions (WxHxD in inches)		15-1/2 x 10-7/8 x 15-1/2
Cavity		
Exterior**		21-3/4 x 13 x 20
POWER/RATINGS		
Input Volt/Hz		120/60
Electric input		Watts 1,500
@ 120V		Amperage 13
ACCESSORIES		
Cooking guide label		●
Oven rack		2-Pedestal
Optional built-in kit††		●
Right-angle plug		●

\*Model can be UFAS/ADA compliant in countertop or built-in configuration. For built-in, please see information for individual model.  
\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*Exterior dimensions: height includes feet, depth does not include handle.  
††See page 260 for built-in trim kit information.

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

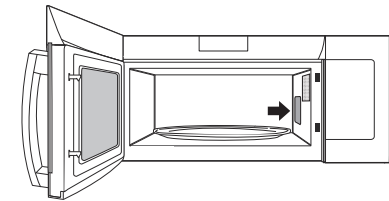

See page 226 for warranty information.

geappliances.com 259

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



MICROWAVE OVEN TRIM KITS

BUILT-IN TRIM KITS FOR 1.5 CU. FT. MICROWAVE OVENS

Built-in trim kits allow installation in a wall, cabinet alone, or over a 30" or 27" single electric wall oven. Use a convection wall oven under these convection microwave ovens for a complete convection cooking center. Do not install microwave lower than 36" above the floor.


30" TRIM KITS FOR MODEL PEB9159

MODEL	Z	30" DELUXE TRIM KIT
PEB9159SJSS	29-3/4"	JX9153SJSS—Stainless
PEB9159EJES	29-3/4"	JX9153EJES—Slate
PEB9159DJWW	29-3/4"	JX9153DJWW—White
PEB9159DJBB	29-3/4"	JX9153DJBB—Black

27" TRIM KITS FOR MODEL PEB9159

MODEL	Z	27" DELUXE TRIM KIT
PEB9159SJSS	26-3/4"	JX9152SJSS—Stainless
PEB9159EJES	26-3/4"	JX9152EJES—Slate
PEB9159DJWW	26-3/4"	JX9152DJWW—White
PEB9159DJBB	26-3/4"	JX9152DJBB—Black

CUTOUT DIMENSIONS  
MODEL PEB9159

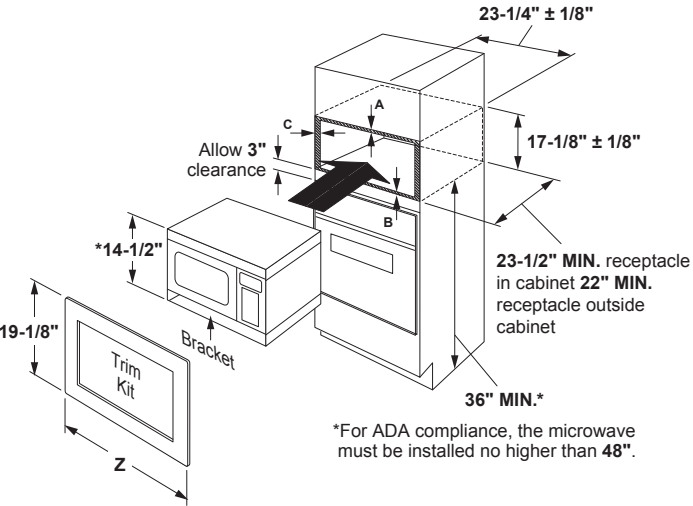


CABINET OVERLAP REQUIREMENTS	30"	27"
A - Overlap of trim kit over top of cabinet	1"	1"
B - Overlap of trim kit over bottom of cabinet	1"	1"
C - Overlap of trim kit over sides of cabinet	3-5/16"	1-7/8"

**NOTE:**  
Allow an additional inch of clearance beyond trim frame on all sides.

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

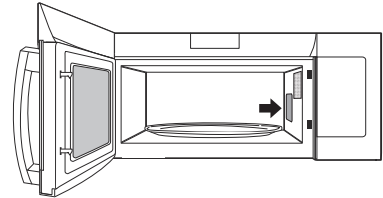

SPACEMAKER® MICROWAVE OVEN

	GE PROFILE™
	PEM31SF PEM31BM PEM31EF PEM31FM PEM31DF
UFAS/ADA compliant†	●/●
California Prop 65	●/●
<b>CAPACITY</b>	
Oven cavity (cu. ft.)	1.1
<b>FEATURES</b>	
Watts (IEC-705 test procedure)	800
Electronic touch controls	●
Electronic digital display with clock	●
Popcorn	●
Beverage	●
Reheat	●
Vegetable	●
Potato	●
Defrost:	
Weight/Time	●
Sensor controls	
Express Cook	1-6 min.
Instant On controls	●
Time Cook	I & II
Add 30 Seconds	●
Power levels	10
Turntable On/Off	●
Turntable diameter (in.)	10-5/8
Kitchen timer/Timer (On/Off)	— / ●
Cooking complete reminder	●
Control lockout	●
<b>APPEARANCE</b>	
	SS TS ES DS
Color appearance*	WW, BB
	Gray Gray Gray Gray CM
Case color*	
<b>WEIGHTS &amp; DIMENSIONS</b>	
Approx. shipping weight (lbs.)	33
Dimensions††	Cavity 17-3/8 x 9 x 12-1/4 Exterior (WxHxD in inches) 24 x 12-1/8 x 12-7/8
<b>POWER/RATINGS</b>	
Input Volt/Hz	120V/60Hz
Electrical input @ 120V	Watts 1,200 Amperage 10.5
<b>ACCESSORIES</b>	
Cooking guide label	●
Optional built-in kit	●
Optional hanging kit	JXA019K**
Right-angle plug	●

†Model must be in built-in configuration to be UFAS/ADA compliant.  
\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate,  
WW = White on white, BB = Black on black, CM = Color-matched.  
††Exterior dimensions: height includes feet, depth does not include handle.  
\*\*JXA019K is available at additional cost.

BUILT-IN TRIM KIT FOR 1.1 CU. FT. MICROWAVE OVENS

Built-in trim kits allow installation in a wall, cabinet alone, or over a 30" or 27" GE electric wall oven. This kit should not be installed over a gas wall oven. Do not install microwave lower than 36" above the floor.


30" DELUXE TRIM KITS FOR MODEL PEM31

MODEL	Z	30" DELUXE TRIM KIT
PEM31SFSS	29-7/8"	JX830SFSS—Stainless
PEM31BLTS	29-7/8"	JX830BMTS—Black Stainless
PEM31EFES	29-7/8"	JX830EFES—Slate
PEM31FMDS	29-7/8"	JX830FMDS—Black Slate
PEM31DFWW	29-7/8"	JX830DFWW—White
PEM31DFBB	29-7/8"	JX830DFBB—Black

27" TRIM KITS FOR MODEL PEM31

MODEL	Z	27" DELUXE TRIM KIT
PEM31SFSS	26-7/8"	JX827SFSS—Stainless
PEM31BLTS	26-7/8"	JX827BMTS—Black Stainless
PEM31EFES	26-7/8"	JX827EFES—Slate
PEM31FMDS	26-7/8"	JX827FMDS—Black Slate
PEM31DFWW	26-7/8"	JX827DFWW—White
PEM31DFBB	26-7/8"	JX827DFBB—Black

CUTOUT DIMENSIONS

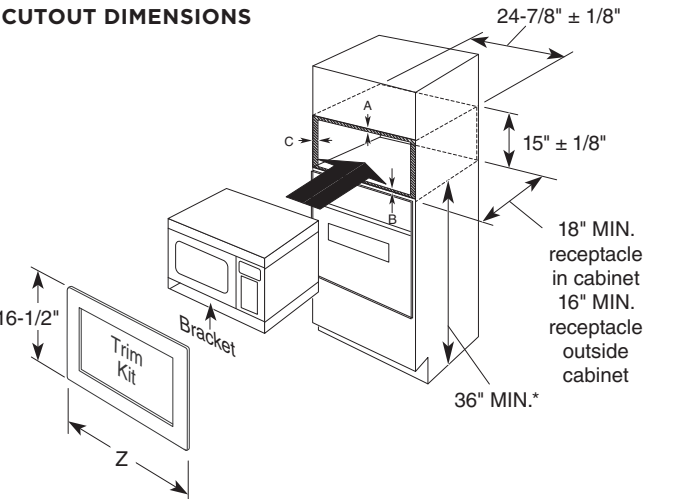

Cabinet overlap requirements	30"	27"
A - Overlap of trim kit over top of cabinet	3/4"	3/4"
B - Overlap of trim kit over bottom of cabinet	5/8"	5/8"
C - Overlap of trim kit over sides of cabinet	2-1/2"	1"

**Note:**  
Allow an additional inch of clearance beyond trim frame on all sides


\*For ADA compliance, the microwave must be installed no higher than 48".

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

UNDERCABINET MOUNTING KIT  
(PART NO. JXA019K) FOR  
MICROWAVE OVEN

**MODEL PEM31**  
**(Sold separately)**

**Not to be used over a thermal oven.**



**Undercabinet Installation**

Install Spacemaker microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements. These microwave ovens can be installed on practically any wood or metal cabinets. Installation may vary depending on cabinets.

**Note:** 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.




36" BUILT-IN ELECTRIC COOKTOPS

	GE PROFILE™			GE		
	INDUCTION	PP9036SJ PP9036BM PP9036DJ	PP7036SJ PP7036BM PP7036DJ	JP5036SJ JP5036DJ	JP3536SJ JP3536TJ JP3536DJ	JP3036SL JP3036TL JP3036DL
	PHP9036SJ PHP9036BM PHP9036DJ					
UFAS/ADA compliant	●	●	●	●	●	●
FEATURES						
Element type	Induction	Ribbon	Ribbon	Ribbon	Ribbon	Ribbon
Number of elements	5	5	5	5	5	5
SyncBurners	●	●	●			
Hot surface indicators	●	●	●	●	●	●
Cooktop "On" indicators	●	●	●	●	●	●
Pan presence & size sensor	●					
Custom Settings		●				
Multi-element timer		●				
Kitchen timer	●	●		●		
Keep Warm setting		●	●	●	●	
Melt setting	●	●	●	●	●	●
CONTROLS						
Type	Digital touch with Red LED	Glide touch with Red LED	Knob with backlit Red LED	Digital touch with Red LED	Knob	Knob
Location	Front	Front	Front	Front	Front	Front
Control lock	●	●	●	●	●	
All-Off	●	●		●		
COOKTOP						
Element—left front	7" 2,500W	7" 1,500W	7" 1,500W	7" 1,500W	8"/5" 1,900W dual	7" 1,500W
Element—left rear	7" 2,500W	7" 1,500W	7" 1,500W	6" 1,200W	6" 1,200W	6" 120W warming zone
Element—right front	8" 3,200W	8"/5" 2,400W Power Boil	8"/5" 2,400W Power Boil	8"/5" 2,400W Power Boil	8" 2,500W Power Boil	8" 2,500W Power Boil
Element—right rear	6" 1,800W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center	11" 3,700W	12"/9"/6" 3,000W tri-ring	12"/9"/6" 3,000W tri-ring	12"/9"/6" 3,000W tri-ring	12"/9" 2,700W dual	12"/9" 2,700W dual
APPEARANCE						
Color appearance*	SS TS BB	SS BB	SS TS BB	SS BB	SS WW BB	SS WW BB
Cooktop color	Black Black w/enamel Black	Black Ceramic-glass Ceramic-glass with beveled edge	Black Black w/enamel Black	Black	Black True white Black	Black True white Black
Cooktop surface	Ceramic-glass Stainless trim	Ceramic-glass Ceramic-glass with beveled edge Stainless trim	Ceramic-glass Stainless trim	Ceramic-glass Stainless trim	Ceramic-glass Stainless trim	Ceramic-glass Stainless trim
Cooktop frame	—	—	—	—	—	—
Knob color*			SS TS BB gloss		SS appearance WW gloss BB gloss	SS appearance WW gloss BB gloss
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	55	58	53	53	53	53
Cabinet width	36	36	36	36	36	36
Overall dimensions (WxHxD in inches)	36 x 4-5/8 x 20-1/2	36 x 5-9/16 x 20-3/8	36 x 5-9/16 x 20-3/8	36 x 5-9/16 x 20-3/8	36 x 4 x 20-1/2	36 x 3-3/8 x 20-7/8
Cutout dimensions (WxD in inches)	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8
POWER/RATINGS						
240V	11.1	9.5	9.6	9.6	9.5	8.0
KW rating @ 208V	9.6	7.2	7.2	7.0	7.1	6.0
240V	50	40	40	40	40	33.4
Amps @ 208V	50	40	40	40	40	29.0
OPTIONAL ACCESSORIES						
Griddle	JXGRIDL1	JXGRIDL1	JXGRIDL1			

\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black.

COUNTER INSTALLATION DIMENSIONS (IN INCHES)

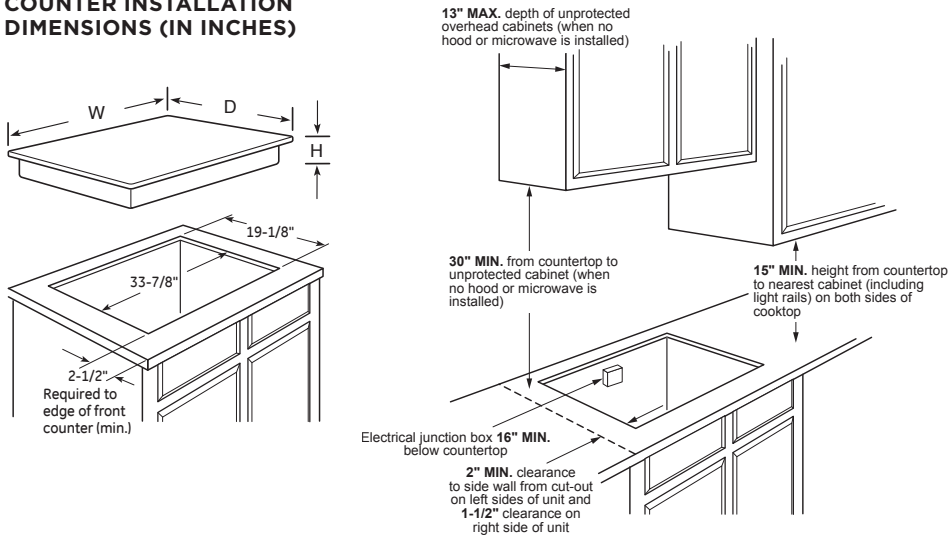


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" BUILT-IN ELECTRIC COOKTOPS

	GE PROFILE			GE		
	INDUCTION	PP9030SJ PP9030BM PP9030DJ	PP7030SJ PP7030BM PP7030DJ	JP5030SJ JP5030DJ	JP3530SJ JP3530TJ JP3530DJ	JP3030SJ JP3030TJ JP3030DJ
	PHP9030SJ PHP9030BM PHP9030DJ					
UFAS/ADA compliant	●	●	●	●	●	●
FEATURES						
Element type	Induction	Ribbon	Ribbon	Ribbon	Ribbon	Ribbon
Number of elements	4	5	5	4	4	4
SyncBurners	●	●	●	●		
Hot surface indicators	●	●	●	●	●	●
Cooktop "On" indicators	●	●	●	●	●	●
Pan presence & size sensor	●					
Custom settings		●				
Multi-element timer		●				
Kitchen timer	●	●		●		
Keep Warm setting		●	●	●	●	●
Melt setting	●	●	●	●	●	●
CONTROLS						
Type	Digital touch w/Red LED	Glide touch w/Red LED	Knob w/backlit Red LED	Digital touch w/Red LED	Knob	Knob
Location	Front	Front	Front	Front	Right	Right
Control lock	●	●	●	●	●	
All-Off	●	●		●		
COOKTOP						
Element—left front	7" 2,500W	7" 1,500W	7" 1,500W	7" 1,500W	7" 1,500W	6" 1,200W
Element—left rear	7" 2,500W	7" 1,500W	7" 1,500W	7" 1,500W	8" 2,500W Power Boil	8" 2,500W Power Boil
Element—right front	11" 3,700W	8"/5" 2,200W dual	8"/5" 2,200W dual	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	8" 2,500W Power Boil
Element—right rear	6" 1,800W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center		9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil			
APPEARANCE						
Color appearance*	SS TS BB	SS BB	SS TS BB	SS BB	SS WW BB	SS WW BB
Cooktop color	Black Black w/ enamel Black	Black Ceramic-glass Ceramic-glass w/beveled edge	Black Black w/ enamel Black	Black	Black True white Black	Black True white Black
Cooktop surface	Ceramic-glass Stainless trim	Ceramic-glass Ceramic-glass w/beveled edge Stainless trim	Ceramic-glass Stainless trim	Ceramic-glass Stainless trim	Ceramic-glass Stainless trim	Ceramic-glass Stainless trim
Cooktop frame	—	—	—	—	—	—
Knob color*			SS appearance TS appearance BB gloss		SS appearance WW gloss BB gloss	SS appearance WW gloss BB gloss
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	44	46	47	44	43	43
Cabinet width	30	30	30	30	30	30
Overall dimensions (WxHxD in inches)	29-7/8 x 4-5/8 x 21	29-7/8 x 5-9/16 x 21	29-7/8 x 5-9/16 x 21	29-7/8 x 5-9/16 x 21	29-7/8 x 4 x 21	29-3/4 x 4 x 20-7/8
Cutout dimensions (WxD in inches)	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8
POWER/RATINGS						
240V	7.4	9.5	9.4	7.3	8.3	7.4
KW rating @ 208V	6.4	7.1	7.1	5.5	6.2	5.6
240V	40	40	40	40	40	40
Amps @ 208V	40	40	40	30	30	30
ACCESSORIES						
Griddle	JXGRIDL1	JXGRIDL1	JXGRIDL1	JXGRIDL1	JXTR32B JXTR32W	JXTR32B JXTR32W
Trim kit	JXTR32B	JXTR32B	JXTR32B	JXTR32B	JXTR32B JXTR32W	JXTR32B JXTR32W

\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black.

COUNTER INSTALLATION DIMENSIONS (IN INCHES)

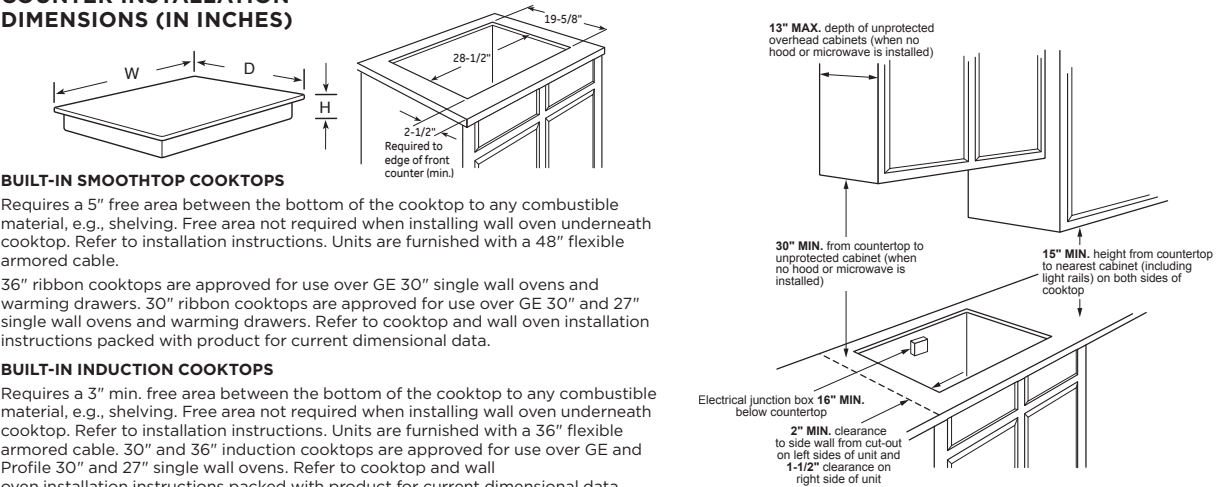

BUILT-IN SMOOTHTOP COOKTOPS

Requires a 5" free area between the bottom of the cooktop to any combustible material, e.g., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Units are furnished with a 48" flexible armored cable.

36" ribbon cooktops are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

BUILT-IN INDUCTION COOKTOPS

Requires a 3" min. free area between the bottom of the cooktop to any combustible material, e.g., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Units are furnished with a 36" flexible armored cable. 30" and 36" induction cooktops are approved for use over GE and Profile 30" and 27" single wall ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




21" BUILT-IN ELECTRIC COOKTOP

	GE	
	JP256BM	JP3021DP
UFAS/ADA compliant		
FEATURES & CONTROLS		
Element type	Ribbon	Ribbon
Number of elements	2	2
Control type	Knob (infinite switch)	Knob (infinite switch)
Control location	Front right	Front right
Control lock	No	No
Knob cleaning	Dishwasher-safe	Dishwasher-safe
Cooktop "On" indicators, location	1, front right	1, front right
COOKTOP		
Element—left front	9"/6" dual-element	9"/6" dual-element
Element—left rear	6" 1,200W	6" 1,200W
APPEARANCE		
Color appearance*	BB	BB
Cooktop color	Patterned black	Patterned black
Cooktop surface	Ceramic-glass	Ceramic-glass
Knob color	Black plastic	Black plastic
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	20	20
Net weight (lbs.)	17	17
Cabinet width compatibility (in.)	21	21
Overall dimensions (WxHxD in inches)	21-1/2 x 3-1/4 x 17-1/8	21-1/2 x 3-1/4 x 17-1/8
Cutout dimensions (WxD in inches)	20-1/8 x 16-1/8	20-1/8 x 16-1/8
POWER/RATINGS		
240V	3.7	3.7
KW rating @ 208V	3.2	3.2
240V	20	20
Amps @ 208V	20	20


\*BB = Black on black

COOKTOP DIMENSIONS (IN INCHES)

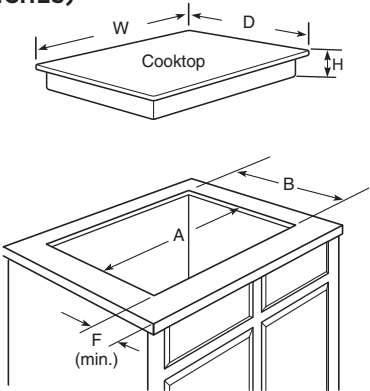

Model	OVERALL			CUTOUT		MINIMUM SPACING TO NEAREST COMBUSTIBLE WALL			TO EDGE OF FRONT COUNTER (MIN.)
	W	D	H	A	B	C	R	L	F
JP256	21-1/2	17-1/8	3-1/4	20-1/8	16-1/8	2	1-3/4	1-3/4	2-3/4
JP3021	21-1/2	17-1/8	3-1/4	19-7/8	15-15/16	2	1-3/4	1-3/4	2-3/4

COUNTER INSTALLATION DIMENSIONS (IN INCHES) MODEL JP256

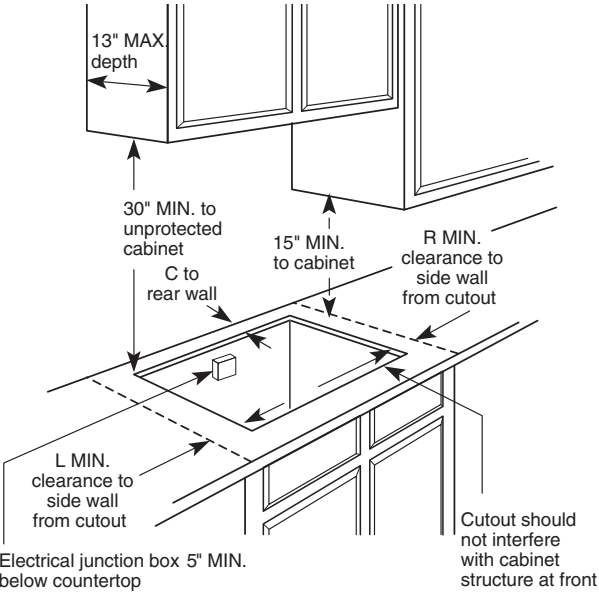

BUILT-IN ELECTRIC COOKTOPS


Required free area between the bottom of the cooktop and any combustible material, e.g., shelving, is 1-1/2" minimum on model JP256. Free area not required when installing wall oven underneath. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

**Note:** The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

INSTALLATION INFORMATION

Before installing, consult installation instructions packed with product for current dimensional data.

COUNTER INSTALLATION DIMENSIONS (IN INCHES) MODEL JP3021

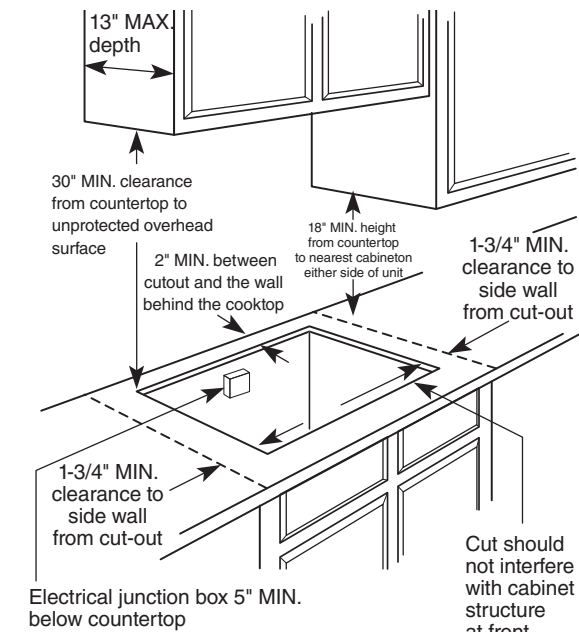

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

36" BUILT-IN GAS COOKTOPS

	GE PROFILE™		GE		
	PGP9036SL	PGP7036SL PGP7036BM	JGP5536SL JGP5536DL	JGP5036SL JGP5036DL	JGP3036SL JGP3036DL
UFAS/ADA compliant					
FEATURES & CONTROLS					
Number of burners	5	5	5	5	5
Control location	Front center	Front center	Front center	Front center	Front center
Control lock	●				
Heavy-duty knobs	●	●			
Backlit knobs	White LED	White LED			
Knob cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe
BURNER CONFIGURATION**					
Burner type	Sealed	Sealed	Sealed	Sealed	Sealed
Ignition type	Electronic	Electronic	Electronic	Electronic	Electronic
Burner-left front BTUs (NG/LPG)	9,500/9,500	9,500/9,500	11,000/9,100	9,500/9,500	12,000/12,000
Burner-left rear BTUs (NG/LPG)	9,500/9,500	9,500/9,500	9,100/8,100	9,500/9,500	9,500/9,500
Burner-right front BTUs (NG/LP gas)	15,000/15,000	15,000/15,000	15,000/13,000	15,000/15,000	15,000/15,000
Burner-right rear BTUs (NG/LPG)	5,000/5,000	5,000/5,000	6,000/6,000	5,000/5,000	9,500/9,500
Burner-center BTUs (NG/LPG)	18,000/18,000 Tri-ring	18,000/18,000 Power Boil	6,000/6,000	15,000/15,000 Power Boil	5,000/5,000
GRATES					
Number of grates	3	3	3	3	3
Grate construction	Matte black, heavy-cast	Matte black, heavy-cast	Matte black deluxe-cast	Matte black, heavy-cast	Matte black, standard-cast
Grate configuration	Continuous	Continuous	Continuous	Continuous	Continuous
Cast-iron griddle	Included	JXGRIDL236		JXGRIDL236	
APPEARANCE					
Color appearance*	SS	SS/TS	SS/BB	SS/BB	SS/WW, BB
Cooktop color	SS	SS/BB	SS/BB	SS/BB	SS/WW, BB
Cooktop surface	Deep-recessed	Deep-recessed	Ceramic-glass	Deep-recessed	Deep-recessed
Knob color*	SS appearance	SS appearance TS appearance	SS appearance Gloss black	SS appearance Gloss black	SS appearance Gloss white, Gloss black
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	57	57	56	46	44
Net weight (lbs.)	51	51	50	40	38
Cabinet width compatibility (in.)	36	36	36	36	36
Overall dims. (WxHxD in inches)	36 x 5-1/2 x 21	36 x 5-1/2 x 21	36 x 3-7/8 x 21-1/4	36 x 5-1/2 x 21	36 x 4-3/4 x 21
Cutout dims. (WxD in inches)	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8
POWER/RATINGS					
Amp Rating @ 120V, 60Hz	5	5	5	5	5

\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black.  
\*\*A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.

30" BUILT-IN GAS COOKTOPS


	GE PROFILE		GE			
	PGP9030SL	PGP7030SL PGP7030BM	JGP5530SL JGP5530DL	JGP5030SL JGP5030DL	JGP3530SL JGP3530DL	JGP3030SL JGP3030DL
UFAS/ADA compliant						
FEATURES & CONTROLS						
Number of burners	5	5	4	5	4	4
Control location	Front center	Front center	Right side	Front center	Right side	Right side
Control lock	●					
Heavy-duty knobs	●	●				
Backlit knobs	White LED	White LED				
Knob cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher- safe	Dishwasher-safe	Dishwasher-safe
BURNER CONFIGURATION**						
Burner type	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Ignition type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Burner-left front BTUs (NG/LPG)	9,500/9,500	9,500/9,500	9,100/8,100	9,500/9,500	18,000/18,000	15,000/15,000
Burner-left rear BTUs (NG/LPG)	9,500/9,500	9,500/9,500	11,000/9,100	9,500/9,500	5,000/5,000	5,000/5,000
Burner-right front BTUs (NG/LP gas)	12,000/12,000	12,000/12,000	15,000/13,000	12,000/12,000	12,000/12,000	12,000/12,000
Burner-right rear BTUs (NG/LPG)	5,000/5,000	5,000/5,000	6,000/6,000	5,000/5,000	9,500/9,500	9,500/9,500
Burner-center BTUs (NG/LPG)	18,000/18,000 Tri-ring	18,000/18,000 Power Boil		15,000/15,000 Power Boil		
GRATES						
Number of grates	3	3	2	3	2	2
Grate construction	Matte black heavy-cast	Matte black heavy-cast	Matte black deluxe-cast	Matte black, heavy-cast	Matte black, standard-cast	Matte black, standard-cast
Grate configuration	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous
Cast-iron griddle	Included	JXGRIDL230		JXGRIDL230		
APPEARANCE						
Color appearance*	SS	SS/TS	SS/BB	SS/BB	SS/BB	SS/WW, BB
Cooktop color	SS	SS/BB	BB/BB	SS/BB	SS/BB	SS/WW, BB
Cooktop surface	Deep-recessed	Deep-recessed	Ceramic-glass	Deep-recessed	Deep-recessed	Deep-recessed
Knob color*	SS appearance	SS appearance TS appearance	SS appearance Gloss black	SS appearance Gloss black	SS appearance Gloss black	SS appearance Gloss white, Gloss black
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	50	50	48	48	44	44
Net weight (lbs.)	44	44	42	42	38	38
Cabinet width compatibility (in.)	30	30	30	30	30	30
Overall dims. (WxHxD in inches)	30 x 5-1/2 x 21	30 x 5-1/2 x 21	30 x 3-7/8 x 21	30 x 5-1/2 x 21	30 x 4-3/4 x 21	30 x 4-3/4 x 21
Cutout dims. (WxD in inches)	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8
POWER/RATINGS						
Amp Rating @ 120V, 60Hz	5	5	5	5	5	5

\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black.  
\*\*A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.




30" BUILT-IN GAS COOKTOPS

COUNTER INSTALLATION  
DIMENSIONS (IN INCHES)

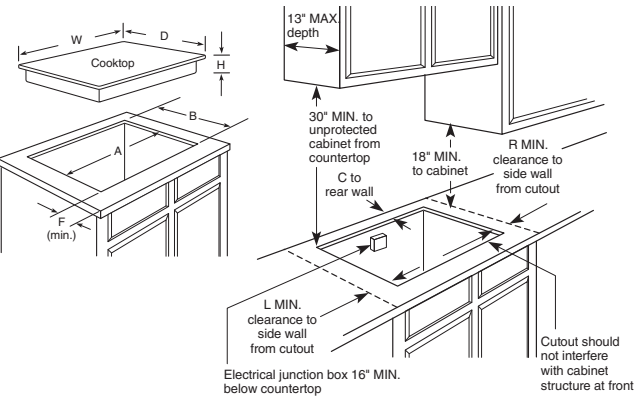


**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

GAS CONNECTION  
ALL MODELS



**Installation with single wall oven information:**  
Select 30" gas cooktops are approved for use over GE 27" wall ovens and warming drawers. 36" and 30" gas cooktops are approved for use over 30" wall ovens and warming drawers. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

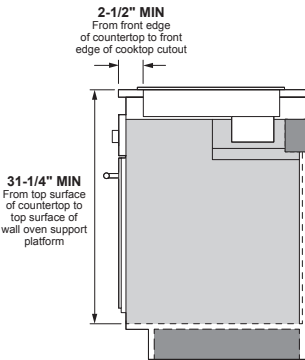

BUILT-IN COOKTOP & WALL OVEN COMBINATIONS

Find approved cooktop/wall oven installation combinations below.

COOKTOPS			WALL OVENS					
			30" SINGLE WALL OVENS				27" SINGLE WALL OVENS	
			PTS9000	PTS7000	JTS5000	JTS3000	PKS7000	JKS5000
			JKS3000					
36" INDUCTION COOKTOP	PHP9036		●	●	●	●		
	PHP9030		●	●	●	●	●	●
36" ELECTRIC COOKTOPS	PP9036		●	●	●	●		
	PP7036		●	●	●	●		
	JP5036		●	●	●	●		
	JP3536		●	●	●	●		
	JP3036		●	●	●	●		
	PP9030		●	●	●	●	●	●
30" ELECTRIC COOKTOPS	PP7030		●	●	●	●	●	●
	JP5030		●	●	●	●	●	●
	JP3530		●	●	●	●	●	●
	JP3030		●	●	●	●	●	●
36" GAS COOKTOPS	PGP9036		●	●	●	●		
	PGP7036		●	●	●	●		
	JGP5536		●	●	●	●		
	JGP5036		●	●	●	●		
	JGP3036		●	●	●	●		
30" GAS COOKTOPS	PGP9030		●	●	●	●		
	PGP7030		●	●	●	●		
	JGP5530		●	●	●	●	●	●
	JGP5030		●	●	●	●		
	JGP3530		●	●	●	●	●	●
	JGP3030		●	●	●	●	●	●

UL\* approved cooktops over wall ovens.

For models available before 2019, please reference [geappliances.com](#).

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


30" BUILT-IN ELECTRIC DOWNDRAFT COOKTOP

	GE PROFILE™
	PP9830SJ PP9830TJ PP9830DJ
UFAS/ADA compliant	●
FEATURES & CONTROLS	
Element type	Ribbon
Number of elements	4
Control type	Knob
Control location	Front
Control lock	●
Downdraft	3 speeds
Hot surface indicators	●
Cooktop "On" indicators	●
COOKTOP	
Element—left front	7" 1,800W bridge
Element—left rear	7" 1,800W bridge
Element—right front	9" 3,000W Power Boil
Element—right rear	6" 1,500W
APPEARANCE	
	SS WW BB
Color appearance*	Black White Black
Cooktop color	Ceramic-glass
Cooktop surface	Stainless trim White Black
Cooktop frame	SS appearance WW gloss BB gloss
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	43
Cabinet width	30
Overall dimensions (WxHxD in inches)	29-13/16 x 2-1/4 x 21-15/16 29-3/4 x 2-3/16 x 21-7/8 29-3/4 x 2-3/16 x 21-7/8
Cutout dimensions (WxD in inches)	28-7/8 x 20-5/8
POWER/RATINGS	
240V	9.1
KW rating @ 208V	6.9
240V	40
Amps @ 208V	40


\*SS = Stainless, WW = White on white, BB = Black on black.



BUILT-IN ELECTRIC DOWNDRAFT COOKTOP  
DIMENSIONS (IN INCHES)  
MODEL PP9830

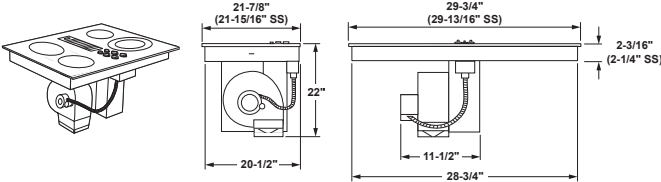

BUILT-IN ELECTRIC AND GAS CABINET  
DIMENSIONS (IN INCHES)  
MODELS PP9830, PGP9830



RECEPTACLE LOCATION

Install an approved junction box within shaded area shown in diagram. Junction box must be at least 10-1/2" below top of cabinet.

PREPARING THE CABINET  
FOR INSTALLATION

In some cabinets, the sides may need to be scooped or cut down 5-3/4" as shown and the corner braces removed in order to accommodate the cooktop.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


30" BUILT-IN GAS-ON-GLASS DOWNDRAFT COOKTOP

	GE PROFILE
	PGP9830SJ PGP9830TJ PGP9830DJ
UFAS/ADA compliant	●
FEATURES & CONTROLS	
Number of burners	4
Burner type	Sealed
Control type	Knob
Control location	Front
Ignition	Electronic
Downdraft	3 speeds
COOKTOP	
Burner—left front	9,100 BTU
Burner—left rear	9,100 BTU
Burner—right front	11,500 BTU
Burner—right rear	5,500 BTU
APPEARANCE	
	SS WW BB
Color appearance*	Black White Black
Cooktop color	Ceramic-glass
Cooktop surface	2 separate
Grates	Matte black, medium-cast
Grates material	Stainless trim White Black
Cooktop frame	SS appearance WW gloss BB gloss
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	43
Cabinet width	30
Overall dimensions (WxHxD in inches)	29-13/16 x 2-1/4 x 21-15/16 29-3/4 x 2-3/16 x 21-7/8 29-3/4 x 2-3/16 x 21-7/8
Cutout dimensions (WxD in inches)	28-7/8 x 20-5/8
POWER/RATINGS	
120V	

\*SS = Stainless, WW = White on white, BB = Black on black.




BUILT-IN GAS DOWNDRAFT COOKTOP  
DIMENSIONS (IN INCHES)  
MODEL PGP9830

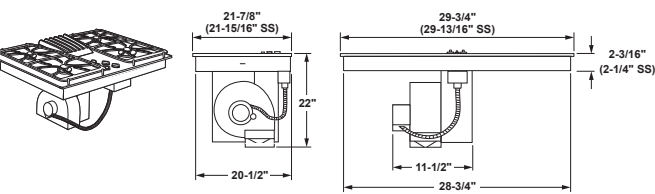

BUILT-IN ELECTRIC AND GAS CUTOUT  
DIMENSIONS (IN INCHES)  
MODELS PP9830, PGP9830

**Note:** These cooktops are approved for indoor use only.

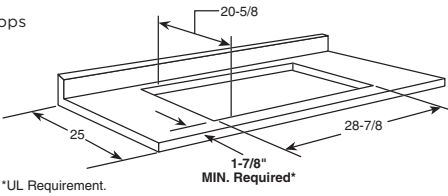

**Note:** A 5" minimum spacing to adjacent side wall is required on PGP9830. A 6" minimum spacing to adjacent side wall is required on PP9830.

**Note:** JXCK89 cord kit needed for the installation of model PP9830.

**Note:** All gas cooktop models require 7/16" free area below cooktop height to combustible material, and require 18" minimum from countertop to adjacent overhead cabinets.\* \*ADA requirement.


See page 226 for warranty information.

[geappliances.com](#)




BUILT-IN ELECTRIC AND GAS DOWNDRAFT COOKTOP VENTING OPTIONS


MODELS PP9830, PGP9830

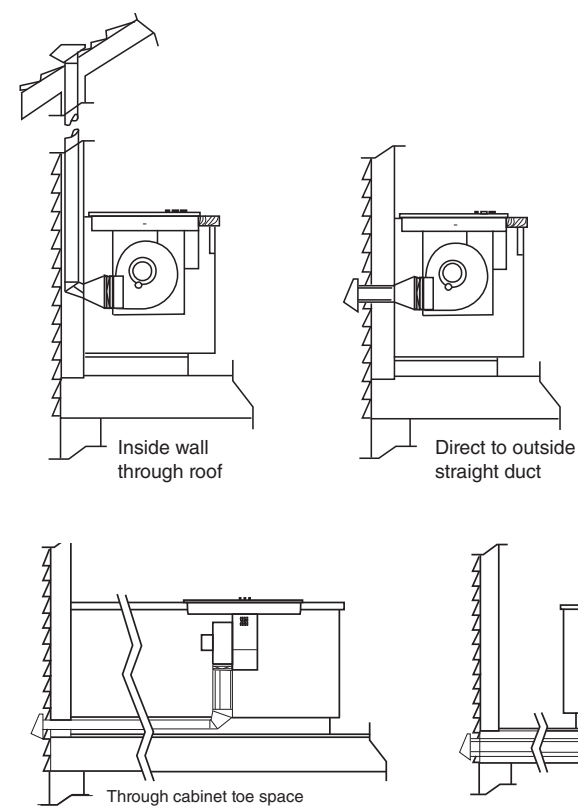

BUILT-IN ELECTRIC AND GAS DOWNWARD VENTING DIMENSIONS (IN INCHES)

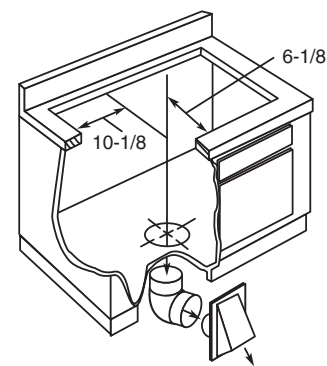

BUILT-IN ELECTRIC AND GAS REAR WALL VENTING DIMENSIONS (IN INCHES)



**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**WALL INSTALLATION**  
Wall installations require 25" countertop depth. When cabinet is flush against the wall, the fan housing can be rotated to the horizontal position for direct venting through rear wall. Make a countertop cutout in the range cabinet according to unit dimensions and installation type. Duct hole is positioned in back of cabinet for through-the-wall ducting.

**PENINSULA OR ISLAND INSTALLATION**  
For peninsula/islands, a minimum 26" countertop depth is suggested. Blower should be in vertical position. Island or peninsula cabinets may require adjustment in cutout depth and/or location within the width dimensions. Duct hole is positioned in bottom of cabinet for island or peninsula installation.


**SLAB INSTALLATION**  
For peninsula or island installation and rear wall ducting, **6" PVC duct or locally approved piping should be used if installing under a poured concrete slab.**  
**Note:** Electrical cable is not supplied with unit.

**JXCK89 ELECTRICAL CONNECTION KIT**  
Optional accessory kit for PP9830 electric downdraft cooktop only, includes junction box and conduit.  
**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.  
**Installing the ductwork**  
Use galvanized or aluminum duct in 6" round or 3-1/4" x 10" size, or combination of both. **PVC duct or locally approved piping should be used if installing under a poured concrete slab.** Local building code must be followed in specifying type and schedule of all duct used.


**Note:** Ductwork must be vented to outside. Do not vent into a wall, ceiling, crawlspace, attic or any concealed space. Always use an appropriate roof or wall cap with damper. Laundry-type wall caps should never be used. For maximum efficiency use the shortest and straightest duct run possible, with as few fittings as possible. For satisfactory performance the duct run should not exceed 100 feet equivalent length. Refer to the table of equivalent lengths (shown in installation instructions) for various duct configurations.

UNIVERSAL HOODS


	UNIVERSAL							
	UVW9361SL UVW9361BL	UVW9301SL UVW9301BL	UVW8361SL	UVW8301SL	UVW7241SN	UVC9360SL	UVC9300SL	UVC7300SL
ADA capable	● (w/Connected App)	● (w/Connected App)	● (w/UXRC1)	● (w/UXRC1)		● (w/Connected App)	● (w/Connected App)	● (w/UXRC1)
AHAM certified	Yes	Yes	Yes	Yes		Yes	Yes	Yes
UL certified	●	●	●	●		●	●	●
California Title 24 compliant	●	●	●	●	●	●	●	●
FEATURES & CONTROLS								
Control type	Electronic Touch	Electronic Touch	Electronic backlit	Electronic backlit	Push-button	Electronic backlit push-button	Electronic backlit push-button	Electronic backlit push-button
Control location	Front	Front	Front	Front	Front	Bottom	Bottom	Bottom
Number of fan speeds	4	4	3	3	3	4	4	4
Number of blowers	1	1	1	1	1	1	1	1
FILTERS								
Number of filters	2	2	3	3	1	3	3	2
Included grease filter type	Mesh	Mesh	Mesh	Mesh	Mesh	Baffle	Baffle	Mesh
Filter cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe
LIGHTING								
Number of cooktop lights	3	3	2	2	2	3	3	2
Lighting control	On/Off/ Nite-Light	On/Off/ Nite-Light	On/Off/ Nite-Light	On/Off/ Nite-Light	On/Off	On/Off/ Nite-Light	On/Off/ Nite-Light	On/Off/ Nite-Light
Type of lighting	LED	LED	LED	LED	Halogen	LED	LED	LED
Light bulb(s)	Included	Included	Included	Included	Included	Included	Included	Included
INSTALLATION								
Mounting	Wall	Wall	Wall	Wall	Wall	Custom	Custom	Custom
Venting type	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible
Exhaust direction	Top	Top	Top	Top	Top	Top	Top	Top
Round duct diameter (in.)	8	8	8	8	6	8	8	8
CFM/SONES RATINGS								
Top Round (blower boost speed)	610/~	610/~	N/A	N/A	450/~	610/~	610/~	390/~
Top Round (high speed)	290/4	290/4	350/3.1	350/3.1		288/4.9	288/4.9	302/3.7
APPEARANCE								
Color appearance*	SS TS	SS TS	SS	SS	SS	SS	SS	SS
WEIGHTS & DIMENSIONS								
Approx. shipping wt. (lbs.)	84	79	76	73	51	52	48.5	42
Net weight (lbs.)	73	71	65	64	38	45	43	37
Cabinet width compatibility (in.)	36	30	36	30	24"	34-3/8	28-3/8	30
Overall dimensions (WxHxD in inches)	40-1/6 x 29-1/8 x 22-5/6	34-1/4 x 29-1/8 x 22-5/6	40-1/6 x 29-1/8 x 22-5/6	34-1/4 x 29-1/8 x 22-5/6	24 x 18-3/8 x 19	37-4/5 x 16-1/2 x 22	31-8/9 x 16-1/2 x 22	20-1/2 x 9-5/8 x 11-1/4
POWER/RATINGS								
Amp Rating @ 120V	3.0	3.0	2.5	2.5	15	3.0	3.0	2.5
OPTIONAL ACCESSORIES								
Makeup air accessory kit - 8", 6" duct	JXMUA8	JXMUA8	JXMUA8	JXMUA8		JXMUA8	JXMUA8	JXMUA8
Duct reducer	UXCT86	UXCT86	UXCT86	UXCT86	UXCT86	UXCT86	UXCT86	UXCT86
10 (ft.) ceiling duct cover kit			UX10DC8SLSS	UX10DC8SLSS				
12 (ft.) ceiling duct cover kit	UX12DC9SLSS/BLTS	UX12DC9SLSS/BLTS	UX12DC9SLSS	UX12DC9SLSS				
14 (ft.) ceiling duct cover kit	UX14DC9SLSS/BLTS	UX14DC9SLSS/BLTS	UX14DC9SLSS	UX14DC9SLSS				
Charcoal filter	UXCF91	UXCF91	UXCF91	UXCF91		UXCF91	UXCF91	UXCF91
Power cord kit	JXHC1	JXHC1	JXHC1	JXHC1		JXHC1	JXHC1	JXHC1




**UNIVERSAL HOODS**  
The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 36" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.  
NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood.

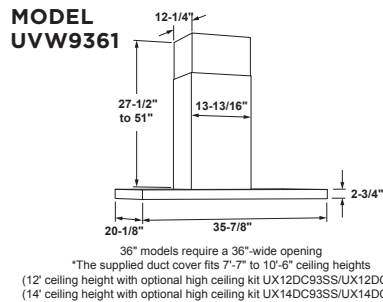


36" models require a 36"-wide opening  
\*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights  
(12' ceiling height with optional high ceiling kit UX12DC93SS/UX12DC93TS)  
(14' ceiling height with optional high ceiling kit UX14DC93SS/UX14DC93TS)

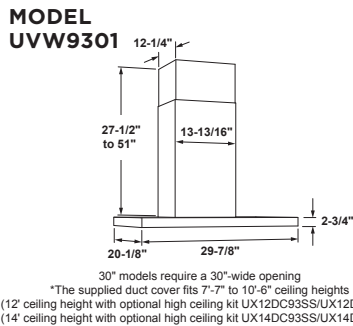

30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights  
(12' ceiling height with optional high ceiling kit UX12DC93SS/UX12DC93TS)  
(14' ceiling height with optional high ceiling kit UX14DC93SS/UX14DC93TS)

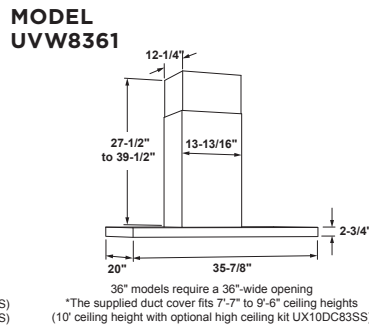


36" models require a 36"-wide opening  
\*The supplied duct cover fits 7'-7" to 9'-6" ceiling heights  
(10' ceiling height with optional high ceiling kit UX10DC83SS)




30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-7" to 9'-6" ceiling heights  
(10' ceiling height with optional high ceiling kit UX10DC83SS)


MODEL UVC9360

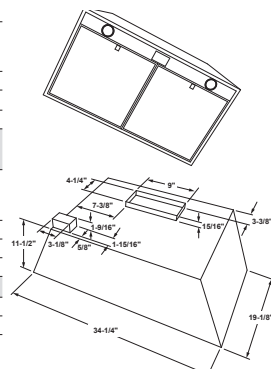


MODEL UVC9300

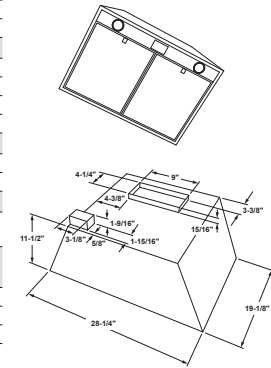

MODEL UVC7300

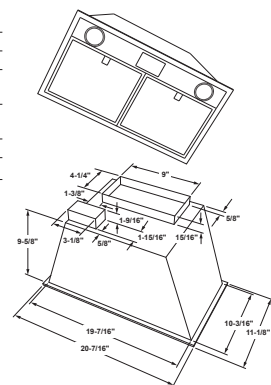

MODEL UVW7241






36" AND 30" DESIGNER/COMMERCIAL HOODS


	GE PROFILE™				
	JV966D	JV936D	PV977N	PV976N	PV970N
AHAM certified	●	●	●	●	●
California Title 24 compliant	●	●	●	●	●
FEATURES & CONTROLS					
Control type	Rotary knobs	Rotary knobs	Push-button	Push-button	Push-button
Control location	Hidden	Hidden	Front	Front	Front
Auto-on heat-sensor feature	No	No	Yes	Yes	Yes
Number of fan speeds	4	4	4	4	4
Number of blowers	1	1	1	1	1
FILTERS					
Number of filters	2	2	1	1	1
Included grease filter type	Metal mesh	Metal mesh	Metal mesh/Charcoal	Metal mesh/Charcoal	Metal mesh/Charcoal
Filter cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe/ Disposable	Dishwasher-safe/ Disposable	Dishwasher-safe/ Disposable
LIGHTING					
Number of cooktop lights	2	2	4	2	2
Lighting control	Off/High/Night light	Off/High/Night light	Off/Low/High	Off/Low/High	Off/Low/High
Type of lighting	Halogen	Halogen	Halogen	Halogen	Halogen
Light bulb(s)	Included	Included	Included	Included	Included
INSTALLATION					
Mounting	Wall	Wall	Island	Wall	Wall
Venting type	Vented	Vented	Convertible	Convertible	Convertible
Exhaust direction	Top	Top	Top	Top	Top
Round duct diameter (in.)	7	7	8	8	8
Maximum equivalent duct length (ft.)	100	100	100	100	100
CFM/SONES RATINGS					
Top Round (high speed)	590/7.5	590/7.5	450/7.0	450/7.0	450/7.0
Top Round (working speed)	160/0.4	160/0.4	210/1.5	210/1.5	210/1.5
APPEARANCE					
Color appearance*	SS	SS	SS	SS	SS
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	77	68	110	75	68
Net weight (lbs.)	60	54	100	68	60
Cabinet width compatibility (in.)	36	30	36	36	30
Overall dimensions (WxHxD in inches)	36 x 18 x 21	30 x 18 x 21	35-7/8 x 3-1/8 x 27-5/8	35-7/8 x 3-1/8 x 19-3/4	29-7/8 x 2-1/2 x 19-3/4
POWER/RATINGS					
Amp Rating @ 120V	3.90	3.90	4.10	4.10	4.10
OPTIONAL ACCESSORIES					
Makeup air accessory kit— 8”/6” duct			JXMUA8/JXMUA6	JXMUA8/JXMUA6	JXMUA8/JXMUA6
15” Cabinet spacer	JXS56SS	JXS50SS			
Duct cover kit	UXCH2NSS	UXCH2NSS			

\*SS = Stainless.


ISLAND MOUNT  
PV977

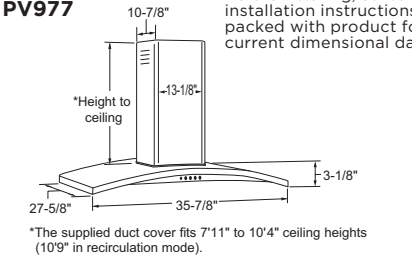

WALL MOUNT  
PV976

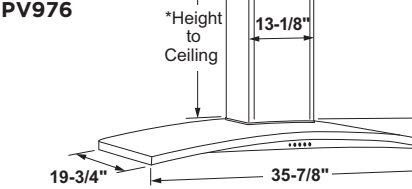


PV970

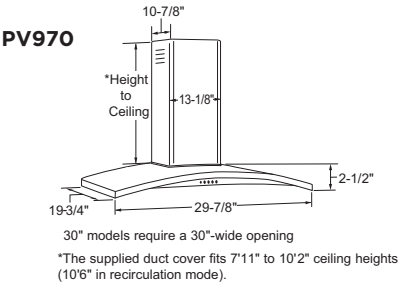

**Note:** Vent hoods should be of the same or greater width of the cooking surface.


**Installation information:**  
Before installing, consult installation instructions packed with product for current dimensional data.



**Note:** Typical overhead cabinets are 12" deep. For cabinets of greater depth, place spacer of non-combustible material behind hood, or use the 15" cabinet spacer optional accessory—see chart for details.


\*Exact installation height depends on ceiling height.

**NOTE:** Installation height should be measured from the cooking surface to the bottom of the outer glass portion of the hood. This hood must be installed 24" min. above the cooking surface. The cooking surface should be at least 36" above the floor. This hood may be vented to the outdoors, or it can be installed for recirculating operation.



The vent hood must be installed 24" min. above the cooking surface. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling. The supplied duct cover is sized to reach 8' to 10' ceiling heights.

**NOTE:** Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. All necessary parts for recirculating operation are supplied with the hood. No kits are required.

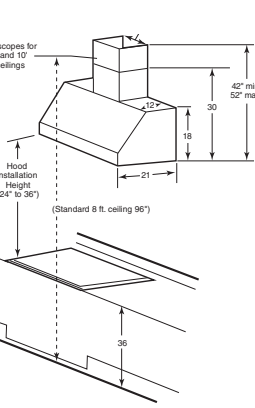


INSTALLED ABOVE  
A COOKTOP  
(shown with optional chimney kit)  
JV966, JV936

OPTIONAL KITS FOR 36"  
AND 30" DESIGNER/COMMERCIAL  
HOODS JV966, JV936

UXCH2NSS—Stainless chimney extension kit  
JXMUA8—Makeup air accessory kit for 8" inlet duct  
JXMUA6—Makeup air accessory kit for 6" inlet duct



Listed by Underwriters Laboratories

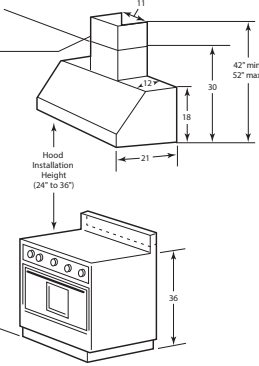


INSTALLED ABOVE  
A RANGE (shown with optional chimney kit)  
JV966, JV936

36" AND 30" DESIGNER HOODS

	GE	
	JVW5361SJ JVW5361BJ JVW5361EJ* JVW5361FJ	JVW5301SJ JVW5301BJ JVW5301EJ* JVW5301FJ
ADA capable	●	●
AHAM certified	●	●
California Title 24 compliant	●	●
FEATURES & CONTROLS		
Control type	Electronic backlit	Electronic backlit
Control location	Front	Front
Number of fan speeds	4	4
Number of blowers	1	1
FILTERS		
Number of filters	3	2
Included grease filter type	Metal mesh	Metal mesh
Filter cleaning	Dishwasher-safe	Dishwasher-safe
LIGHTING		
Number of cooktop lights	2	2
Lighting control	On/Off/Night light	On/Off/Night light
Type of lighting	Halogen	Halogen
Light bulb(s)	Included	Included
INSTALLATION		
Mounting	Wall	Wall
Venting type	Convertible	Convertible
Exhaust direction	Top	Top
Round duct diameter (in.)	6	6
CFM/SONES RATINGS		
Top Round (boost speed)	350/6.6	350/6.6
Top Round (high speed)	340/5.1	340/5.1
Top Round (working speed)	150/1.0	150/1.0
APPEARANCE		
Color appearance**	SS/TS/ES/DS	SS/TS/ES/DS
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	37	35
Net weight (lbs.)	20	16
Cabinet width compatibility (in.)	36	30
Overall dimensions (WxHxD in inches)	36 x 9-3/4 x 18-1/2	30 x 9-3/4 x 18-1/2
POWER/RATINGS		
Amp Rating @ 120V	2.5	2.5
OPTIONAL ACCESSORIES		
Makeup air accessory kit—8”/6” duct	JJXMUA6	JJXMUA6
10 (ft.) ceiling duct cover kit	UXDC53SS/TS/ES/DS	UXDC53SS/TS/ES/DS
Charcoal filter	JXCF72	JXCF72
Remote control	UXRC70	UXRC70


\*10 ft. duct cover included in box.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate.

JVW5361

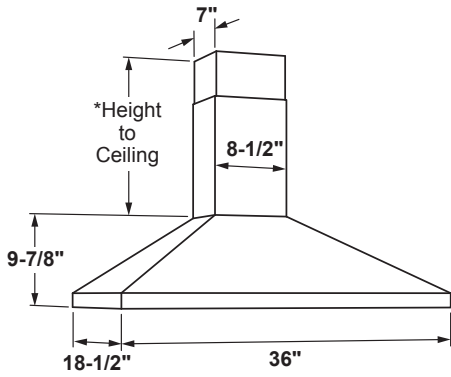


36" models require a 36"-wide opening  
\*The supplied duct cover fits 7'-4" to 9'-0" ceiling heights (10' with optional high ceiling kit UXDC72 and UX10DC53. See install instructions for specific details.)

JVW5301

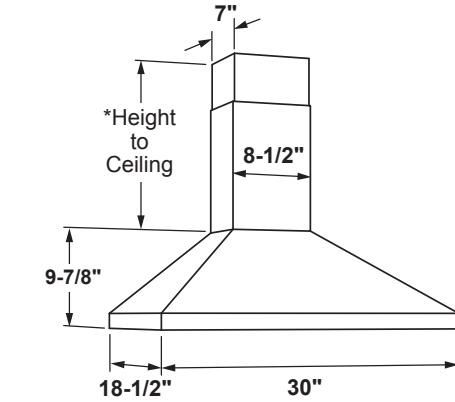

30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-4" to 9'-0" ceiling heights (10' with optional high ceiling kit UXDC72 and UX10DC53. See install instructions for specific details.)

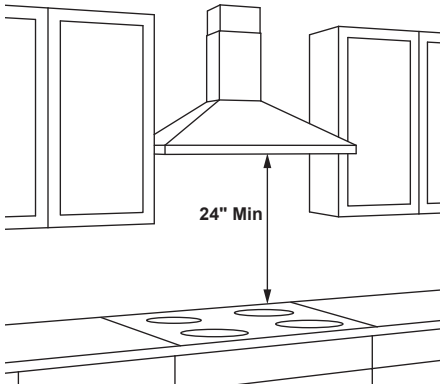

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 38" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

**NOTE:** Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood. However, when installed for recirculating, the optional charcoal filter UXC72 will need to be purchased separately.




Listed by Underwriters Laboratories



36" AND 30" TELESCOPIC DOWNDRAFT SYSTEMS

	UNIVERSAL	
	UVB36SK UVB36DK	UVB30SK UVB30DK
ADA compliant	●	●
AHAM certified	●	●
California Title 24 compliant	●	●
FEATURES & CONTROLS		
Control type	Electronic push-button	Electronic push-button
Control location	Remote	Remote
Number of fan speeds	4	4
Number of blowers	1	1
FILTERS		
Number of filters	2	2
Included grease filter type	Metal mesh	Metal mesh
Filter cleaning	Soap & water	Soap & water
INSTALLATION		
Venting type	Vented	Vented
Exhaust direction	Downdraft	Downdraft
Rectangular duct size (in.)	3-1/4 x 10	3-1/4 x 10
Round duct diameter (in.)	6	6
Maximum equivalent duct length (ft.)	100	100
Optional remote blower mount	Capable	Capable
CFM/SONES RATINGS		
Downdraft (high speed)	370/9.0	370/9.0
Downdraft (working speed)	140/2.5	140/2.5
APPEARANCE		
Color appearance*	SS BB	SS BB
Top cover plate*	SS Black	SS Black
Telescopic assembly*	SS	SS
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	74	69
Net weight (lbs.)	59	54
Cabinet width compatibility (in.)	36	30
Overall dimensions (WxHxD in inches)	36 x 27 x 9-1/2	30 x 27 x 9-1/2
Telescoping height (in.)	8.5	8.5
POWER/RATINGS		
Amp rating @ 120V	4.00	4.00
*SS = Stainless, BB = Black on black. Note: Approved for use with GE Profile™ and GE electric and sealed burner gas cooktops.		

OVERALL DIMENSIONS (IN INCHES)  
MODELS UVB30, UVB36

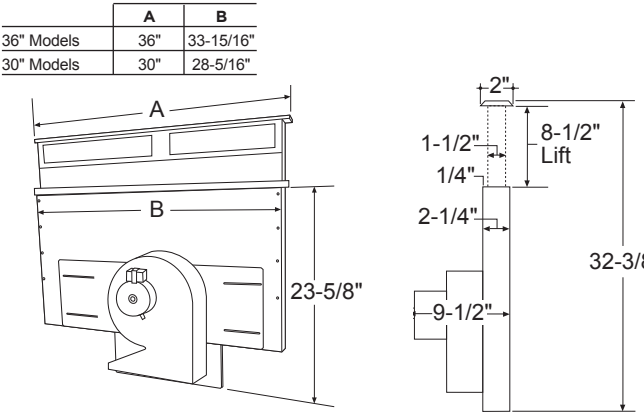

Approved for use with the following GE Profile and GE cooktops: 36" and 30" electric models, 36" and 30" gas sealed burner models and 36" and 30" Profile induction models. Before installing, consult installation instructions packed with product for current dimensional data.

**Not approved for use with standard burner gas cooktops.**

**Note:** The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.


**Note:** Dimensions shown are for reference only. Before cutting out countertop, refer to instructions packed with downdraft and cooktop.

**Note: Installation in cabinets/countertops against the wall will not be possible in most applications. Against-the-wall installations are limited to dimension requirements. Refer to installation instructions packed with product for further details.**

**JXRB67 Indoor Remote Kit.** Optional service part may be ordered for installation of motor and blower assembly in an indoor remote location.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

The vent is designed for a 3-1/4" x 10" duct size. A 3-1/4" x 10" rectangular to 6" round transition duct is available at your local building supply store.

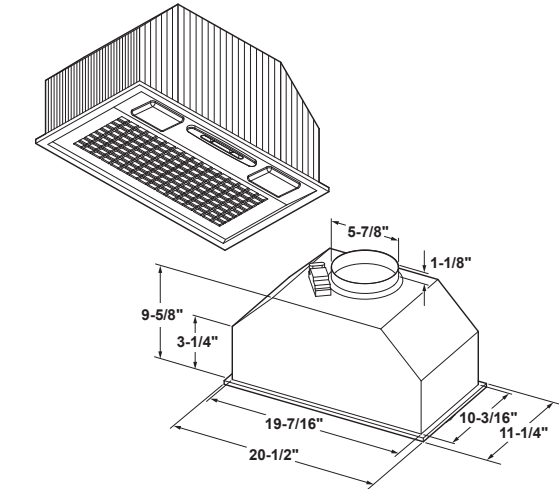

This vent hood and liner assembly must be installed 24" required minimum and 36" recommended maximum above the cooking surface. Always refer to the cooktop or range installation instructions for product-specific clearances.

**NOTE:** Installation height should be measured from the cooking surface to the bottom edge of the metal hood liner or cabinet surface.

**NOTE:** UL requires any combustible surface to be a minimum of 30" above the cooking surface. The custom cabinet internal height must be 16" minimum.

This hood can be vented to the outdoors, or it can be installed for recirculating operation. For recirculating operation, refer to Recirculating Installation Planning.

This hood may be mounted onto a cabinet or installed over an island.




Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

36" AND 30" UNDER-THE-CABINET HOODS


	GE PROFILE™		GE							
	PVX7360SJ PVX7360FJ	PVX7300SJ PVX7300FJ	JVX5365SJ	JVX5305SJ JVX5305EJ JVX5305DJ	JVX5360SJ JVX5360BJ JVX5360EJ JVX5360DJ	JVX5300SJ JVX5300BJ JVX5300EJ JVX5300DJ	JVX3300SJ JVX3300EJ JVX3300DJ	JV338H	JN328K JN327H	JVX3240SJ JVX3240DJ
ADA capable	●	●	●	●	●	●	●			●
ENERGY STAR® certified			●	●						
AHAM certified	●	●	●	●	●	●	●	●		●
California Title 24 compliant	●	●	●	●	●	●				
FEATURES & CONTROLS										
Control type	Glass Touch	Glass Touch	Rocker Switch	Rocker Switch	Electronic Backlit	Electronic Backlit	Rocker Switch	Rocker Switch	Rocker Switch	Rocker Switch
Control location	Front	Front	Front	Front	Front	Front	Front	Front	Front	Front
Chef Connect	Yes	Yes								
Number of fan speeds	4	4	2	2	4	4	2	2	2	2
Number of blowers	1	1	1	1	1	1	1	1	1	1
FILTERS										
Number of filters	2	2	2	2	2	2	1	1	1	1
Included grease filter type	Dual full-length stainless mesh	Dual full-length stainless mesh	Dual full-length metal mesh	Dual full-length metal mesh	Dual full-length metal mesh	Dual full-length metal mesh	Single metal mesh	Metal mesh	Charcoal	Single metal mesh
Filter cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Hand wash	Disposable	Dishwasher-safe
LIGHTING										
Number of cooktop lights	2	2	2	2	2	2	1	1	1	1
Lighting control	On/Off/ Nite-Light	On/Off/ Nite-Light	On/Off	On/Off	On/Off/ Nite-Light	On/Off/ Nite-Light	On/Off	On/Off	On/Off	On/Off
Type of lighting	Dual LED	Dual LED	Dual LED	Dual LED	Dual halogen	Dual halogen	Incandescent	Incandescent	Incandescent	Incandescent
Light bulb(s)	Included	Included	Included	Included	Included	Included	Included	Not included	Not included	Included
INSTALLATION										
Mounting	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet
Venting type	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Vented	Recirculating	Convertible
Exhaust direction	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top
Round duct diameter (in.)	7	7	7	7	7	7	7	7	Front	7
CFM/SONES RATINGS										
Top Round (boost speed)	390/8.0	390/8.0			310/7.0	310/7.0				
Top Round (high speed)	310/6.0	310/6.0	270/4.5	270/4.5	260/5.5	260/5.5	200/6.5	160/7.0		200/6.5
Top Round (medium speed)	210/4.0	210/4.0			170/3.0	170/3.0				
Top Round (working speed)	70/1.5	70/1.5	100/1.5	100/1.5	60/1.0	60/1.0	130/5.0			130/5.0
APPEARANCE										
Color appearance	SS DS	SS DS	SS	SS ES WW,BB	SS TS ES WW,BB	SS TS ES WW,BB	SS ES WW,BB	WW,BB	SA WW,CC, BB	SS WW
WEIGHTS & DIMENSIONS										
Approx. shipping wt. (lbs.)	30	28	29	27	28	26	23	19	19	21
Net weight (lbs.)	23	21	22	20	21	19	17	19	19	15
Cabinet width compatibility (in.)	36	30	36	30	36	30	30	30	30	24
Overall dimensions (WxHxD in inches)	35-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	35-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	35-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 17-1/2	29-7/8 x 5-1/2 x 17-1/2	23-7/8 x 5-1/2 x 20
POWER/RATINGS										
Amp Rating @120V	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
OPTIONAL ACCESSORIES										
Remote control	UXRC70	UXRC70			UXRC70	UXRC70				
Cabinet spacer	JXS56SS	JXS50SS	JXS56SS	JXS50SS	JXS56SS	JXS50SS	JXS50SS			
Power cord kit	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXCH1	JXCH1	JXHC1
Damper accessory (round)	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22
*SS=Stainless, TS = Black Stainless, DS=Black Slate, ES=Slate, SA=Silver, WW=White, CC=Bisque, BB=Black.										

HOOD INSTALLATION DIMENSIONS (IN INCHES)


MODELS PVX7360, JVX5365, JVX5360




MODELS PVX7300, JVX5305, JVX5300, JVX3300

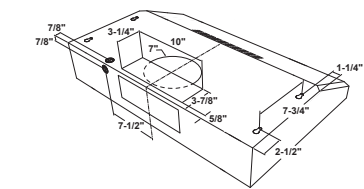

MODEL JN328, JN327H



MODEL JVX3240




**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


MODEL JV338H

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.



MODEL JV338H

Exhaust outlet connects to 7" diameter duct. Vent top only. Round damper accessory JXDA22 available at additional cost.



OVERALL DIMENSIONS (IN INCHES)

MODEL	A	B	C	D
PVX7360	5-1/2	35-7/8	20	12
PVX7300	5-1/2	29-7/8	20	12
JVX5365	5-1/2	35-7/8	20	12
JVX5305	5-1/2	29-7/8	20	12
JVX5360	5-1/2	35-7/8	20	12
JVX5300	5-1/2	29-7/8	20	12
JVX3300	5-1/2	29-7/8	20	12
JV338	5-1/2	29-7/8	17-1/2	12
JN328/JN327	5-1/2	29-7/8	17-1/2	12
JVX3240	5-1/2	23-7/8	20	12


**JXHC1 Cord Kit:** Allows a receptacle in the cabinet over the range to accommodate either an over-the-range microwave oven or a standard hood.



	UNIVERSAL UVH13012MSS UVH13013MTS UVH13013MDS	
Claims & Certification		UL
FEATURES & CONTROL		
Control type		27" touch screen
Control location	Front	
Number of fan speeds	4	
Number of blowers	1	
Platform	Android 8.1	
Featured integrations	Phillips Hue, The Google Assistant	
Google Voice Assistant	Yes	
Cameras	Front and overhead	
Flavorly Recipe App	Included	
U+ Connect Smart Home App	Yes	
Video & music streaming*	Yes	
FILTERS		
Number of filters	2	
Included grease filter type	Aluminum mesh	
Filter cleaning	Dishwasher-safe	
LIGHTING		
Number of cooktop lights	3	
Lighting control	On/Off/Night	
Type of lighting	LED	
INSTALLATION		
Mounting	Wall	
Venting type	Convertible	
Exhaust direction	Vertical (top), horizontal (rear), recirculation	
Rectangular duct dimensions (in.)	3-1/4 x 10	
CFM/SONES RATINGS		
Top round (blower boost speed)	600	
Top round (high speed)	380/4.0	
APPEARANCE		
Color appearance	Stainless Black Stainless Black Slate	
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	65	
Net weight (lbs.)	58	
Cabinet width compatibility (in.)	30	
Overall dimensions (WxHxD) (in.)	29-3/4 x 16-1/2 x 16-1/4	
POWER/RATINGS		
Amp rating @120V	3.9	
OPTIONAL ACCESSORIES		
Makeup air accessory kit—8", 6" duct	JXMUA8	
Charcoal filter	UXCF91	
Bump out kit	JX15BUMPBB/WW	

\*Requires compatible music or video streaming app downloaded from the Google Play Store and subscription may be required.

NOTE: This product should not be installed over any cooktop or range with a combined cooktop BTU greater than 72,000 BTU.

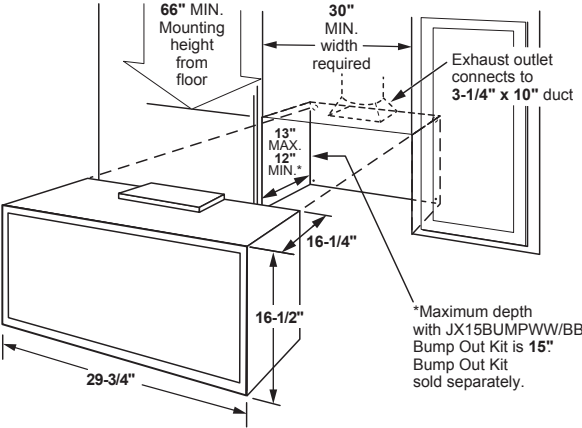


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

	GE	
	JD630SF JD630DF	
UFAS/ADA compliant	●/●	
FEATURES		
Capacity (cu. ft.) upper/lower	4.4	
Cleaning system	Self-clean	
Cooking technology	Traditional	
CONTROLS		
Certified Sabbath mode	●	
Control lock capability	●	
Electronic oven controls	●	
Delay bake	●	
Digital temperature display	●	
Hot surface lights	4	
Self-clean latch	Auto	
COOKTOP		
Element—left front	8" 2,000W	
Element—left rear	8" 2,000W	
Element—right front	9"6" 3,000W Power Boil	
Element—right rear	6" 1,200W	
Melt	●	
OVEN		
Audible preheat signal	●	
Bake element	6-pass	
Broil element	6-pass	
Dual-element bake	●	
Interior oven light	1 incandescent	
Oven racks	2	
APPEARANCE		
Ceramic-glass cooktop	Black Patterned White, Black	
Color appearance*	SS with gray WW, BB	
Handle color*	SS CM	
Handle design	Designer-style	
Knobs—weighted	●	
Knobs—color*	SS CM	
Oven interior	Black	
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	184 179	
Overall oven interior dimensions (WxHxD in inches)	24 x 17-1/2 x 18-1/4	
POWER/RATINGS		
Bake wattage	3,410W	
Broil wattage	3,420W	
Amp rating 240V/208V	40	
KW rating 240V/208V	11.9/8.9	

\*SS = Stainless, WW = White with white glass door, BB = Black with black glass door, CM = Color-matched.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

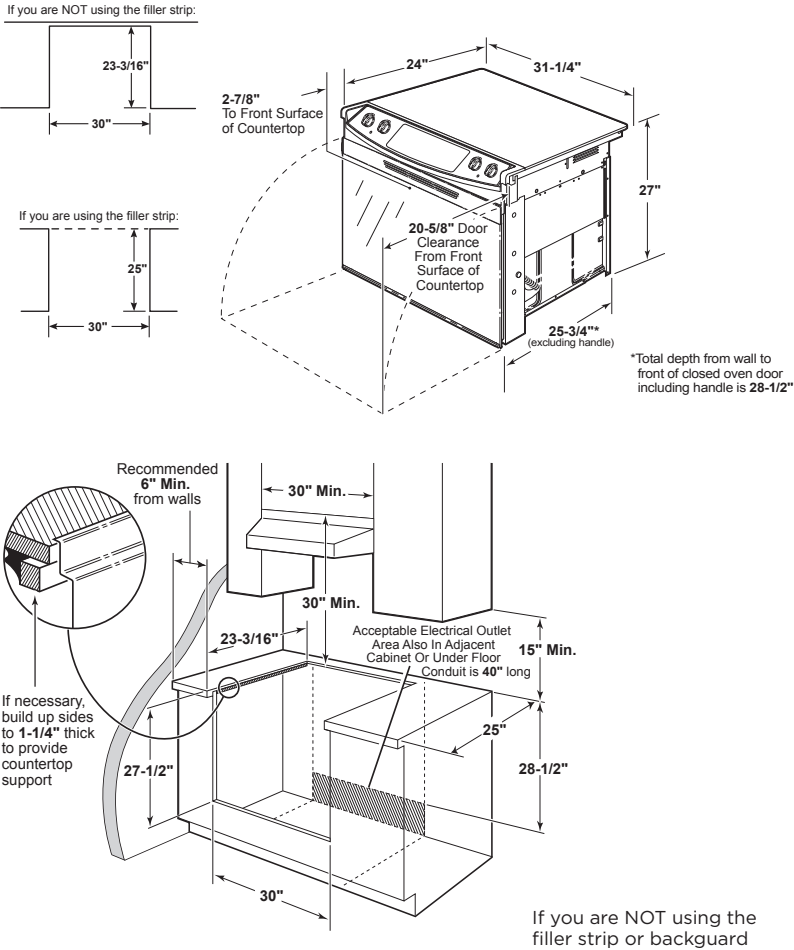

Optional accessory backguard

(Available at additional cost)  
Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout

MODEL	BACKGUARD KIT
JD630SFSS	JXS32SS
JD630DFWW	JXS32WW
JD630DFBB	JXS32BB

Optional rear filler trim kit

(Available at additional cost)  
Fills gap between cooktop and wall when unit is installed in 30" free-standing cutout  
WB07T10680—Stainless/Black models  
WB07T10681—White models  
WB07T10682—Bisque models

**Note:** Cabinets installed adjacent to drop-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

**Note:** Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

**Note:** Drop-in configuration is also approved for 34" countertop heights.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**IMPORTANT:** 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. THEY DO NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.

Drop-in ranges are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.



27" DROP-IN ELECTRIC RANGE

	GE
	JM250DF
UFAS/ADA compliant	●/●
California Prop 65	●/●
FEATURES	
Capacity (cu. ft.) upper/lower	3.0
Cleaning system	Self-clean
Cooking technology	Traditional
CONTROLS	
Certified Sabbath mode	●
Electronic oven controls	●
Delay bake	●
Digital temperature display	●
Self-clean latch	●
COOKTOP	
Element—left front	8" 2,600W 5-turn
Element—left rear	6" 1,500W 4-turn
Element—right front	6" 1,500W 4-turn
Element—right rear	6" 1,500W 4-turn
Chrome drip bowls	●
OVEN	
Audible preheat signal	●
Bake element	4-pass
Broil element	4-pass
Interior oven light	1 incandescent
Oven racks	2
APPEARANCE	
Color appearance*	WW, BB
Handle color*	CM
Handle design	D-shaped
Knobs—color	CM
Oven door with window	●
Oven interior	Gloss black
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	124
Overall oven interior dimensions WxHxD (in inches)	19 x 15 x 18
POWER/RATINGS	
Bake wattage	2,000W
Broil wattage	3,400W
Amp rating 240V/208V	40
KW rating 240V/208V	10.6/8.0


\*WW = White with white glass door, BB = Black with black glass door, CM = Color-matched.

DIMENSIONS AND INSTALLATION INFORMATION

Important: This range is designed to hang from the countertop. It does not rest on the floor.

If necessary, build up sides to 1-1/2" thick to provide screw anchor surface and countertop support

These screws are anti-tip devices and must be installed in the front and rear

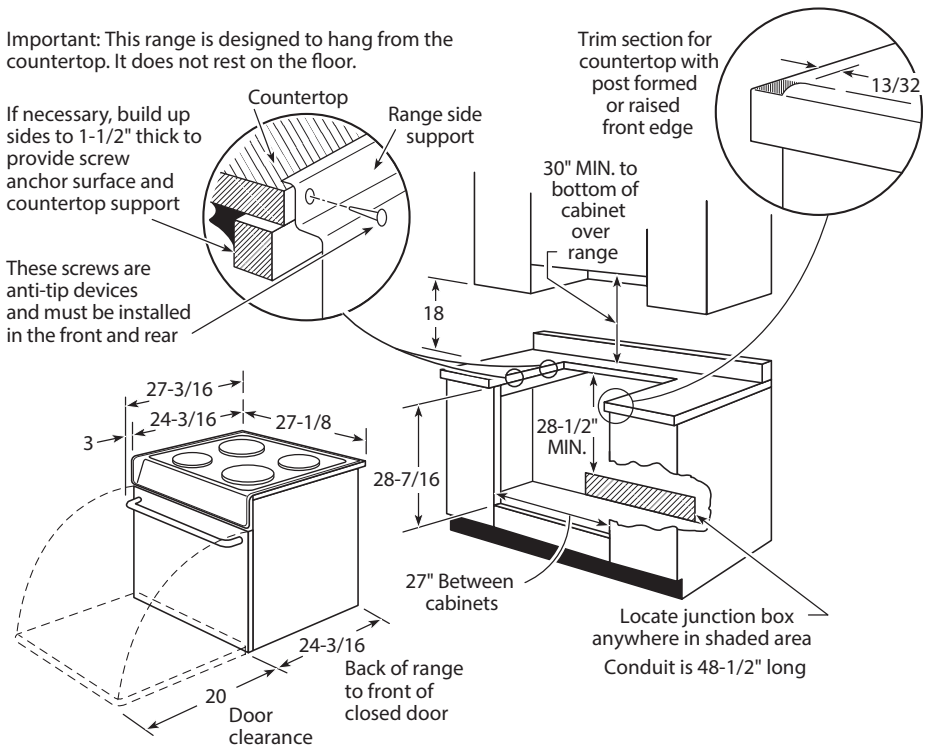


**Note:** All 27" drop-in electric ranges conform to UL requirements for minimum spacing between range and side wall below countertop.  
**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**Optional backguard** (Available at additional cost)  
JX27RBK = Black  
JX27RWH = White

COUNTERTOP CUTOUT DIMENSIONS

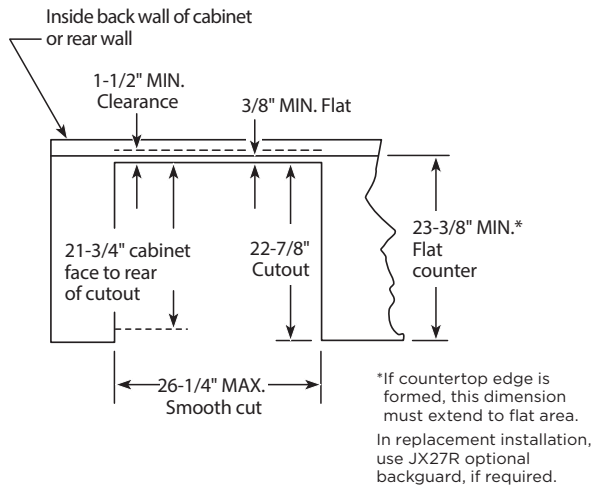

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" SLIDE-IN ELECTRIC RANGES

	GE PROFILE™				GE		
		INDUCTION					
	PHS93XYP	PHS93OYP PHS930BP	PSS93YP PSS93BP	PS960YP PS960BL	JSS86SP	JS760SP JS760EP JS760FP JS760DP	JS645SL JS645EL JS645FL JS645DL
UFAS/ADA compliant	●	●	●	●	●	●	●
California Prop 65	●	●	●	●	●	●	●
FEATURES							
Capacity (cu. ft.) upper/lower	5.3	5.3	5.3	2.2/4.4	5.3	5.3	5.3
Cleaning system	Steam Clean	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Self-clean
Cooking technology	True Convection with Precise Air	True Convection with Precise Air	True Convection with Precise Air	Upper: Traditional Lower: True Convection with Precise Air	True Convection	Convection	Traditional
CONTROLS							
Certified Sabbath mode	●	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●	●
Electronic oven controls	●	●	●	●	●	●	●
Delay bake	●	●	●	●	●	●	●
Digital temperature display	●	●	●	●	●	●	●
Hot surface lights	●	●	●	●	●	●	●
WiFi Connect*	●	●	●	●			
Chef Connect	●	●	●	●			
COOKTOP							
Element—left front	8" 2,500W Sync Element	8" 2,500W Sync Element	8" 5" 1,900W Bridge	8" 5" 1,900W Sync Element	9" 6" 3,100W Power Boil	9" 6" 3,100W Power Boil	9" 6" 3,100W Power Boil
Element—left rear	8" 2,500W Sync Element	8" 2,500W Sync Element	8" 2,000W Bridge	8" 2,000W Sync Burner	6" 1,200W	6" 1,200W	6" 1,200W
Element—right front	11" 3,700W Power Boil	11" 3,700W Power Boil	12" 9" 6" 3,600W Power Boil	12" 9" 6" 3,000W Power Boil	12" 9" 3,000W	12" 9" 3,000W	9" 6" 3,100W Power Boil
Element—right rear	6" 1,800W	6" 1,800W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center	6" 100W Warming Zone	6" 100W Warming Zone	6" 100W Warming Zone	6" 100W Warming Zone	6" 100W Warming Zone	6" 100W Warming Zone	
Melt	●	●	●	●	●	●	●
OVEN							
Audible preheat signal	●	●	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	●	●	
True Convection with Precise Air	●	●	●	●	●	●	
Convection bake	●	●	●	●	●	●	
Convection roast	●	●	●	●	●	●	
Bake element	Hidden	Hidden	Hidden	Hidden	Hidden	Hidden	4-pass
Broil element	●	8-pass	●	8-pass	●	8-pass	6-pass
Drawer	Storage	Storage	Storage	Storage		Storage	Storage
Fast preheat	●	●	●	●	●	●	
Interior oven light	1 halogen	1 halogen	1 halogen	Upper: 1 halogen, 1 incandescent Lower: 1 halogen	1 halogen	1 halogen	1 Incandescent
Temperature probe	●	●	●	●			
No-preheat air fry	●	●	●	●		●	
No-preheat modes**	5	5	5	1/5			
Proof modes	●	●	●	●			
Self-clean oven racks	●	●	●	●	●		
Oven racks	3 heavy-duty	3 heavy-duty	3 heavy-duty	3 heavy-duty	3	3	2
APPEARANCE							
Ceramic-glass cooktop	●	●	●	●	●	●	●
Color appearance***	FS	FS TS	FS TS	FS TS	SS	SS ES DS WW, BB	SS ES DS WW
Handle color***	SS	FS TS	FS TS	SS TS	SS	SS TS CM	SS TS CM
Knobs—weighted						●	●
Knobs—color***	SS	FS TS	FS TS	SS TS	SS	SS TS CM	SS TS CM
Oven interior	Black	Black	Black	Black	Black	Black	Black
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	221	221	221	191	191	200	178
Overall oven interior dimensions (WxHxD in inches)	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8	Upper: 24 x 8-7/8 x 18 Lower: 24 x 17-1/2 x 18-1/4	Upper: 24 x 8-7/8 x 18 Lower: 24 x 17-1/2 x 18-1/4	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/4 x 19-1/2
POWER/RATINGS							
Bake wattage	2,850W	2,850W	2,850W	Upper: 2,650W Lower: 2,650W	2,650W upper/ 2,650W lower	2,850W	2,585W
Broil wattage	3,800W	4,000W	3,800W	Upper: 3,000W Lower: 3,600W	3,000W upper/ 3,600W lower	4,000W	3,410W
Convection wattage	2,500W	2,500W	2,500W	2,500W	1,500W	2,500W	
Amp rating 240V/208V	40	40	40	40	40	40	40
KW rating 240V/208V	115.5/11.6	12.5/10.4	115.5/11.6	16.0/12.0	13.6/10.2	13.6/10.2	12.1/9.1
ACCESSORIES							
Trim kit	JXFILLR1BB	JXFILLR1BB JXFILLR1DD	JXFILLR1BB JXFILLR1BB	JXFILLR1BB JXFILLR1DD	JXFILLR1BB	JXFILLR1BB JXFILLR1DD	JXFILLR1BB JXFILLR1DD


\*WiFi router required.  
\*\*No-preheat modes include baked goods, frozen pizza single rack, frozen pizza multi rack, frozen snack single rack, frozen snack multi rack.  
\*\*\*SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black stainless, ES = Slate, DS = Black Slate, WW = White, BB = Black, CM = Color-matched.




## 30" SLIDE-IN ELECTRIC RANGES

## DIMENSIONS AND INSTALLATION INFORMATION


### MODELS PS960, PSS93, PHS93X, PHS930, JS760, JSS86, JS645

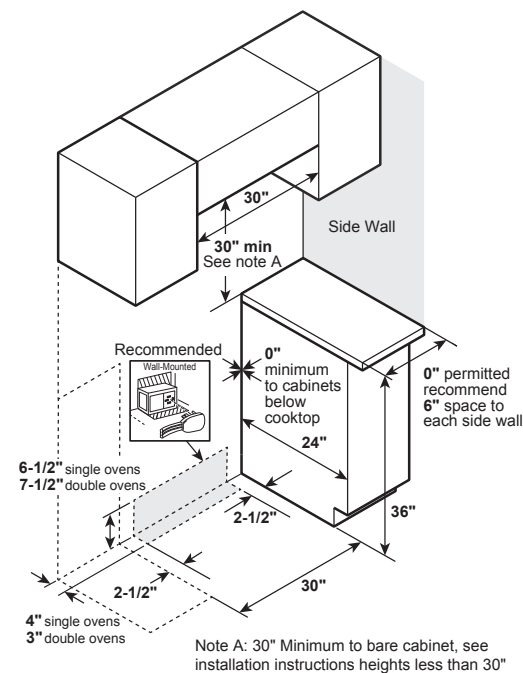

**MODELS PHS93X, PHS930,  
JS760, JS645**

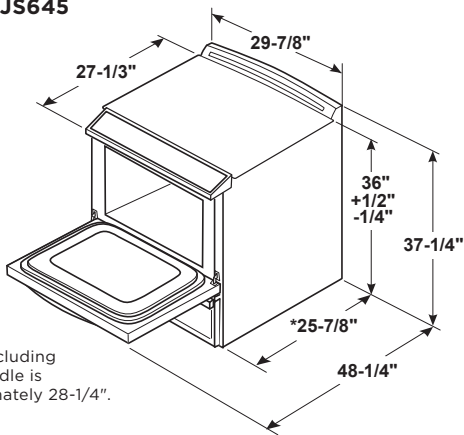

\*Depth including door handle is approximately 28-1/4".

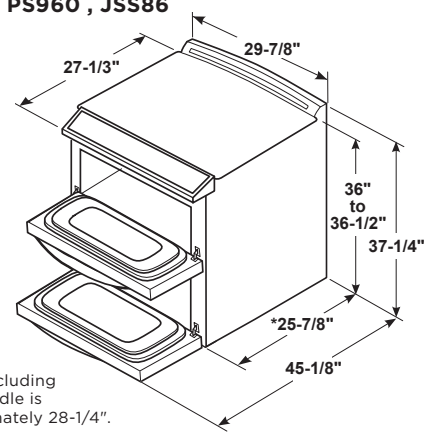**MODEL PS960 , JSS86**

\*Depth including door handle is approximately 28-1/4".

Listed by  
Underwriters  
Laboratories

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

## 30" SLIDE-IN GAS RANGES

	GE PROFILE™			GE		
		DUAL-FUEL				
	PGS960YP	P2S930YP	PGS930YP PGS930BP	JGSS86SP	JGS760SP JGS760EP JGS760FP JGS760DP	JGSS66SEL JGSS66EEL JGSS66FEL
UFAS/ADA compliant	●	●	●		●	●
California Prop 65	●	●	●	●	●	●
FEATURES						
Capacity (upper/lower)	2.4/4.3	5.7	5.6	6.7	5.6	5.3
Cleaning system	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Steam Clean
Cooking technology	Upper: Traditional Lower: Convection	Convection	Convection	Upper: Traditional Lower: Convection	Convection	Traditional
CONTROLS						
Certified Sabbath mode	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●
Electronic oven controls	Glass touch	Glass touch	Glass touch	●	Electronic	Electronic
Delay bake	●			●		
Digital temperature display	●	●	●	●	●	●
Electronic clock & timer	●	●	●	●	●	●
Ignition	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Self-clean latch	Auto	Auto	Auto		Auto	
WiFi Connect*	●	●	●			
Chef Connect	●	●	●			
COOKTOP						
Burner—left front	21,000 BTU Tri-ring	21,000 BTU Tri-ring	21,000 BTU Tri-ring	18,000 BTU Power Boil	18,000 BTU Power Boil	15,000 BTU Power Boil
Burner—left rear	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer
Burner—right front	15,000 BTU Power Boil	15,000 BTU Power Boil	15,000 BTU Power Boil	15,000 BTU	15,000 BTU Power Boil	15,000 BTU Power Boil
Burner—right rear	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU
Burner—center	9,500 BTU dual oval	9,500 BTU dual oval	9,500 BTU dual oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Deep-recessed cooktop	●	●	●	●	●	●
Griddle/grill	Reversible integrated griddle/grill	Reversible integrated griddle/grill	Reversible integrated griddle/grill	Non-stick cast-iron griddle	Non-stick griddle	Non-stick griddle
OVEN						
Audible preheat signal	●	●	●	●	●	●
Auto Recipe Conversion	●	●	●		●	
True European Convection with Precise Air		●				
Convection bake	●	●	●		●	
Convection roast	●	●	●		●	
Drawer		Storage	Storage		Storage	Storage
In-oven broiling	●	●	●	●	●	●
Interior oven light	●	●	●	●	●	●
Temperature probe	●	●	●		●	●
No-preheat air fry	●	●	●		●	
Proof mode	Lower oven	●	●			
No-preheat modes**	3/5	5	5			
Self-clean oven racks	●	●	●			
Oven racks	3 heavy-duty	3 heavy-duty	3 heavy-duty	2	3	2
APPEARANCE						
Color appearance***	FS	FS	FS/TS	SS	SS/ES/DS/WW/BB	SS/ES/DS
Control panel appearance***	SS	SS	SS/TS	SS	SS/ES/DS/WW/BB	SS/ES/DS/WW/BB
Cooktop***	SS	SS	SS/TS	SS	SS/DB/DD/CM	DD/DD/DD
Grates	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte continuous	Black matte continius	Black matte continuous
Grate material	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
Handle color***	FS	FS	FS/TS	SS	SS/SS/TS/CM	SS/SS/TS
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—color***	FS	FS	FS/TS	SS	SS/SS/TS/CM	SS/SS/TS
Oven interior	Black	Black	Black	Black	Black	Gray
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	291	256	244	291	244	214
Overall oven interior dimensions (WxHxD in inches)	Upper: 24 x 9-1/2 x 19-1/8; Lower: 24 x 15 x 20-5/8	24 x 19 x 20-5/8	24 x 19-1/2 x 20-5/8	24 x 19-1/2 x 19-1/2	24 x 19-1/2 x 20-5/8	24 x 19 x 19
POWER/RATINGS						
Bake (000's BTU) Nat./LP	Upper: 7.0/7.0 Lower: 14.0/13.5	2,850W	16.0/16.0	Upper: 7.0/7.0 Lower: 14.0/13.5	16.0/16.0	16.0/16.0
Broil (000's BTU) Nat./LP	Upper: 120V/120V Lower: 16.5/13.5	4,000W	16.5/13.5	Upper: 120V/120V Lower: 16.5/13.5	16.5/13.5	16.5/13.5
Burners (000's BTU) Natural gas/LP	(1) 18.0 (1) 15.0 (2) 9.5 (1) 8.0 (1) 5.0	(1) 18.0 (1) 15.0 (2) 9.5 (1) 8.0 (1) 5.0	(1) 18.0 (1) 15.0 (2) 9.5 (1) 8.0 (1) 5.0	(1) 18.0 (1) 15.0 (1) 10.0/8.0 (1) 9.5 (1) 5.0	(1) 18.0 (1) 15.0 (1) 10/8.0 (1) 9.5 (1) 5.0	(1) 15.0 (1) 15.0 (1) 10/8.0 (1) 9.5 (1) 5.0
Gas range electrical rating****	120V; 60Hz; 15A	208/240V; 60Hz; 30A	120V; 60Hz; 15A	120V; 60Hz; 15A	120V; 60Hz; 15A	120V; 60Hz; 15A
LP conversion kit (included)	●	●	●	●	●	●
ACCESSORIES						
Trim kit	JXFILLR1SS	JXFILLR1SS	JXFILLR1SS JXFILLR1DD	JXFILLR1DD	JXFILLR1SS JXFILLR1SS, JXFILLR1DD JXFILLR1DD JXFILLR1SS JXFILLR1BB	JXFILLR1DD JXFILLR1DD JXFILLR1DD
Reversible cast-iron griddle/grill	(included)	(included)	(included)	JXGRILL1	JXGRILL1	JXGRILL1
Non-stick aluminum griddle	WB31X24738	WB31X24738	WB31X24738	WB31X24738	(included)	(included)
Center grate	(included)	(included)	(included)	JXGRATE1	JXGRATE1	JXGRATE1


\*WiFi router required. †JGS760DELWW use JXFILLR1SS; JGS760DELBW use JXFILLR1BB.  
 \*\*No-preheat modes include baked goods, frozen pizza single rack, frozen pizza multi rack, frozen snack single rack, frozen snack multi rack.  
 \*\*\*SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, BB = Black with black glass door, CM = Color-matched, DD = Dark dorian.  
 \*\*\*\*15A requires a dedicated circuit.  
 Factory set for natural gas. A set of LP orifices is included with each range for LP conversion.

See page 226 for warranty information. [geappliances.com](http://geappliances.com) **279**




30" SLIDE-IN GAS RANGES


DIMENSIONS AND INSTALLATION INFORMATION  
MODEL PGS960, PGS930, JGSS86, JGS760, JGSS66

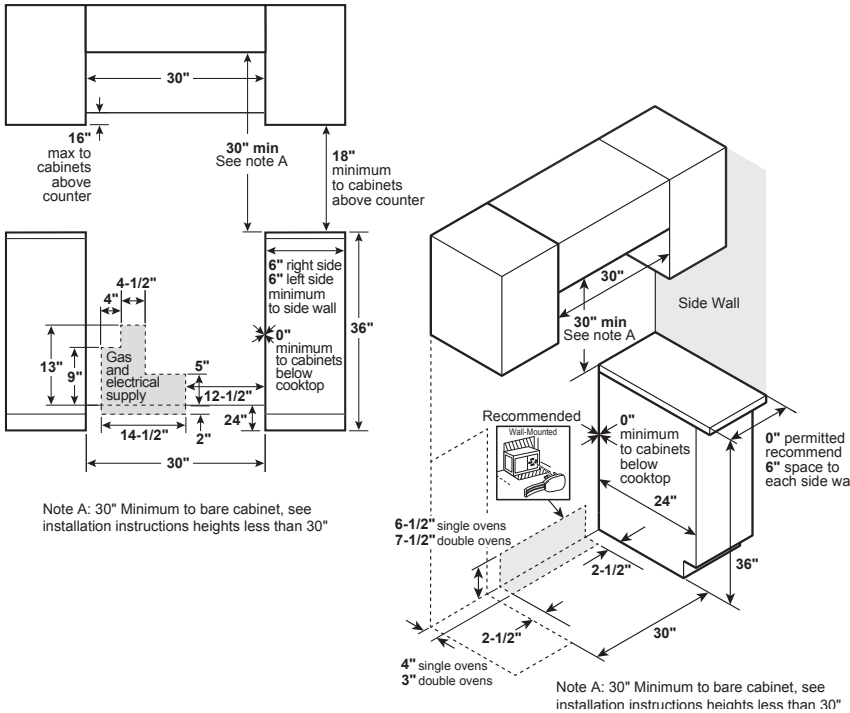


DIMENSIONS AND INSTALLATION INFORMATION  
MODEL P2S930

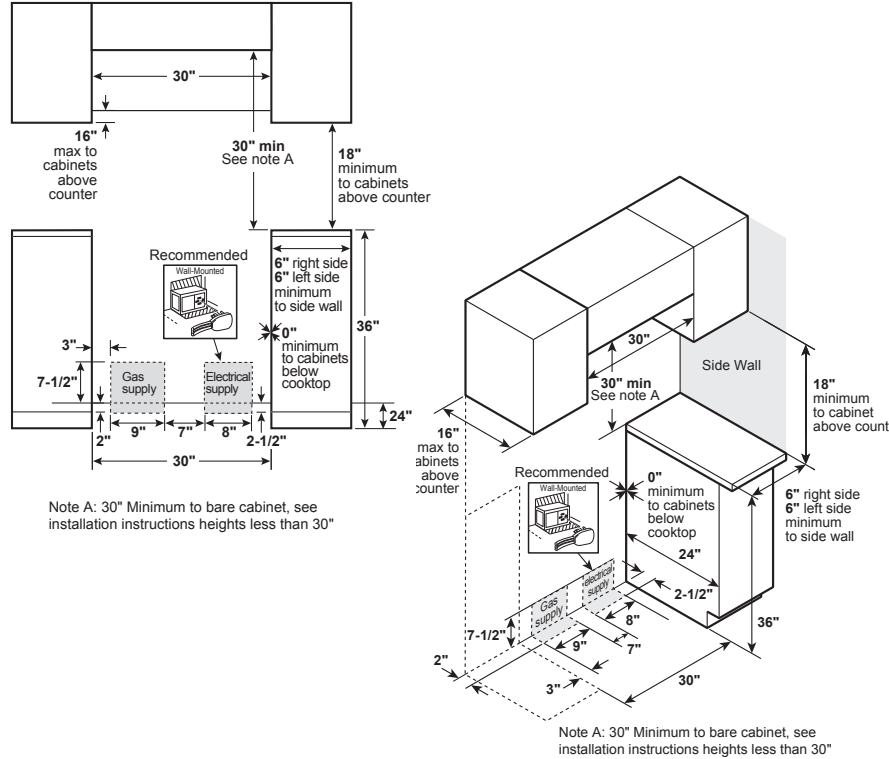


MODEL PGS960

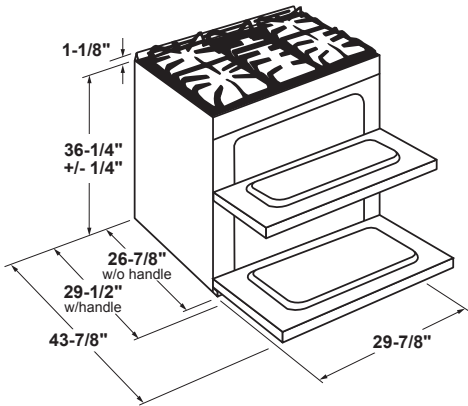

MODELS P2S930, PGS930, JGS760

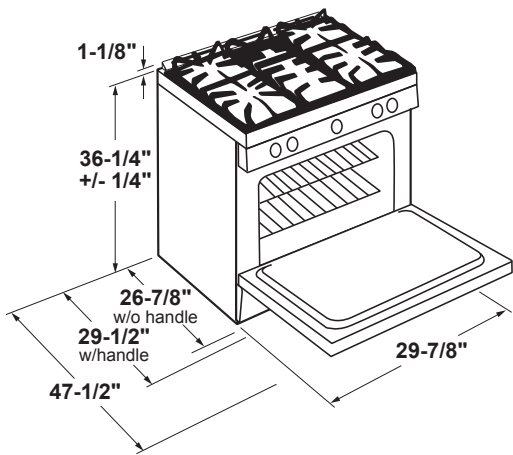

MODEL JGSS66

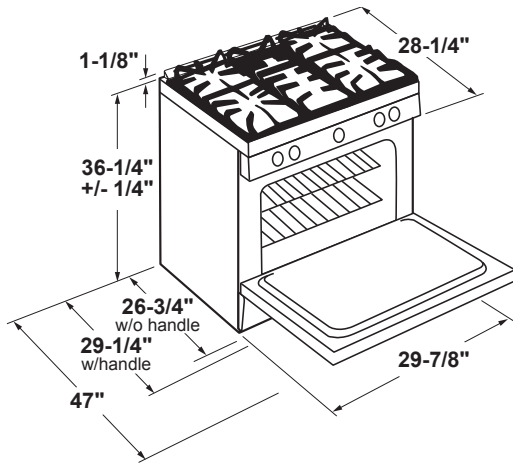


30" FREE-STANDING SMOOTHTOP ELECTRIC RANGES

FEATURES	GE PROFILE™
	PB965YP PB965BP
Capacity (cu. ft.) upper/lower	2.2/4.4
Cleaning system	Self-clean with Steam Clean option
Cooking technology	Upper: Traditional Lower: True Convection with Precise Air
CONTROLS	
Certified Sabbath mode	●
Control lock capability	●
Electronic touch controls	●
Electronic oven controls	●
WiFi Connect*	●
Chef Connect	●
Delay bake	●
Digital temperature display	●
Hot surface lights	●
COOKTOP	
Element—left front	9" 6" 3100W Power Boil
Element—left rear	6" 1200W
Element—right front	12" 9" 6" 3000W Power Boil
Element—right rear	6" 1200W
Element—center	6" 80W Warming Zone
Melt	●
OVEN	
Audible preheat signal	●
Auto Recipe Conversion	●
True European Convection with Precise Air	●
Convection roast	●
Fast preheat	●
Interior oven light	●
Self-clean oven racks	●
Oven racks	3 heavy-duty
Bake element	●
Broil element	Upper: 6-Pass Lower: 8-Pass
APPEARANCE	
Backguard**	SS wrap TS
Ceramic-glass cooktop	Black
Color appearance**	FS TS
Handle color**	SS TS
Handle design	Profile
Knobs—weighted	●
Knobs—color**	SS TS
Oven interior	Black gloss
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	240
Overall oven interior dimensions (WxHxD in inches)	Upper: 24 x 8-7/8 x 18-1/4 Lower: 24 x 17 1/2 x 18 1/4
POWER/RATINGS	
Bake wattage	Upper: 2,650W Lower: 2,650W
Broil wattage	Upper: 3,000W Lower: 3,600W
Convection wattage	2,500W
Amp rating 240V/208V	40
KW rating 240V/208V	16.0/12.0

\*WiFi router required.  
\*\*SS=Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless.

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)  
MODEL PB965

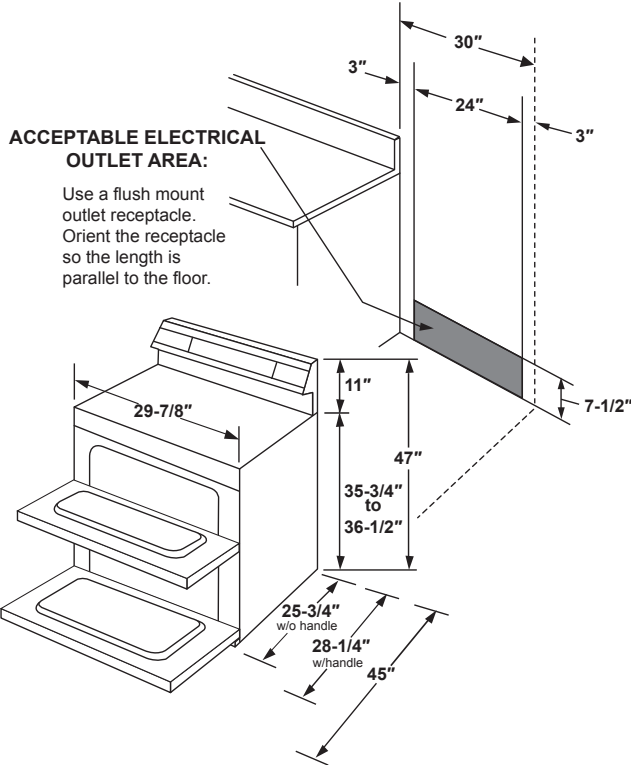

**ACCEPTABLE ELECTRICAL OUTLET AREA:**  
Use a flush mount outlet receptacle. Orient the receptacle so the length is parallel to the floor.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




30" FREE-STANDING SMOOTHTOP ELECTRIC RANGES

	GE PROFILE™	GE					
	PB935YP PB935BP	JBS86SP	JB735SP JB735EP JB735FP JB735DP	JB655SK JB655YK JB655EK JB655FK JB655DK	JB645RK JB645EK JB645FK JB645DK	JB625RK JB625DK	JBS60RK JBS60DK
California Prop 65	●	●	●	●	●	●	●
FEATURES							
Capacity (cu. ft.) up/low	5.3	2.2 / 4.4	5.3	5.3	5.3	5.3	5.3
Cleaning system	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Self-clean	Self-clean	Self-clean	
Cooking technology	Convection with Precise Air	Upper: Traditional Lower: Convection	Convection	Convection	Traditional	Traditional	Traditional
CONTROLS							
Sabbath mode*	●	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●	●
Electronic touch controls	●	●					
Electronic oven controls	●	●	●	●	●	●	●
WiFi Connect**	●						
Chef Connect	●						
Delay bake	●	●	●	●	●		●
Digital temp. display	●	●					●
Hot surface lights	●	●	1	1	1	1	1
Self-clean latch			●	●	●	●	
COOKTOP							
Element—left front	8"/5" 1900W	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	6" 1,200W	6" 1,200W
Element—left rear	8" 2000W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	8" 2,000W	8" 2,000W
Element—right front	12"/9"/6" 3,600W Power Boil	12"/9" 3,000W	12"/9" 3,000W	12"/9" 3,000W	9"/6" 3,100W Power Boil	8" 2,500W Power Boil	9"/6" 3,100W Power Boil
Element—right rear	6" 1200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center	6" 80W warming zone	6" warming zone	6" warming zone	6" warming zone			
Melt	●	●	●	●	●	●	●
OVEN							
Audible preheat signal	●	●	●	●	●	●	●
Auto Recipe Conversion	●		●	●			
True Convection with Precise Air	●						
Convection bake	●	Lower	●	●			
Convection roast	●	Lower					
Drawer	Storage		Storage	Storage	Storage	Storage	Storage
Dual-element bake	●	●		●	●	●	●
Fast preheat	●		●				
Interior oven light	●	Upper: 1 incandescent Lower: 1 halogen	1 halogen	1 incandescent	1 incandescent	1 incandescent	1 incandescent
Oven temperature probe	●						
Oven racks	3	3	2	2	2	2	2
Bake element	Hidden	Upper: 8-Pass Lower: 6 pass	Hidden	4-pass	4-pass	4-pass	4-pass
Broil element	6-pass	Upper: 6-pass Lower: 6-pass	6-pass	6-pass	4-pass	4-pass	4-pass
APPEARANCE							
Backguard***	SS wrap/TS	SS wrap	SS/ES/DS/CM	SS overlay/ES/CM	SS overlay/ES/CM	SS overlay/CM	SS overlay/CM
			Black Black Black Black	Black Black Black Black			
Ceramic-glass cooktop	Black	Black	Pat. white, Black	Pat. white, Black	Pat. white, Black	Pat. white, Black	Pat. white, Black
Color appearance***	FS TS	SS with gray	SS with gray/ ES/DS/WW, BB	SS with gray/FS ES/DS/WW, BB	SS with black/ ES/DS/WW, BB	SS with black/ WW, BB	SS with black/ WW, BB
Handle color***	SS TS	SS	SS/SS/SS/CM	SS/SS/TS/CM	SS/SS/TS/CM	SS/CM	SS/CM
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—weighted	●						
	SS TS	SS	SS/SS/SS/SS/CM	SS/SS/CM	SS/SS/CM	BB/CM	BB/CM
Knobs—color***							
Oven interior	Black gloss	Black	Black gloss	Black gloss	Gray	Gray	Gray
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	180	226	181	171	179	180	161
Overall oven interior dimensions (WxHxD in inches)	24-1/8 x 19-1/2 x 19-3/8	24 x 17 1/2 x 18 1/4	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/4 x 19-1/2	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8
POWER/RATINGS							
Bake wattage	2,585W	Upper: 2,500W Lower: 2,650W	2,850W	2,585W	2,585W	2,585W	2,585W
Broil wattage	4,000W	Upper: 2,500W Lower: 3,600W	3,800W	3,800W	3,410W	3,410W	3,410W
Convection wattage	1,500W						
Amp rating 240V/208V	40	40	40	40	40	40	40
KW rating 240V/208V	12.1/9.1	15.6 / 11.7	12.5 / 9.4	12.4 / 9.3	12.1 / 9.1	10.4 / 7.8	11.0 / 8.3



\*See use and care manual for required accessory.  
\*\*WiFi router required.  
\*\*\*SS = Stainless, FS=Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, BB = Black with black glass door,  
CM = Color-matched.

DIMENSIONS AND INSTALLATION INFORMATION

MODELS PB935, JB735, JB655, JB645, JB625 AND JBS60

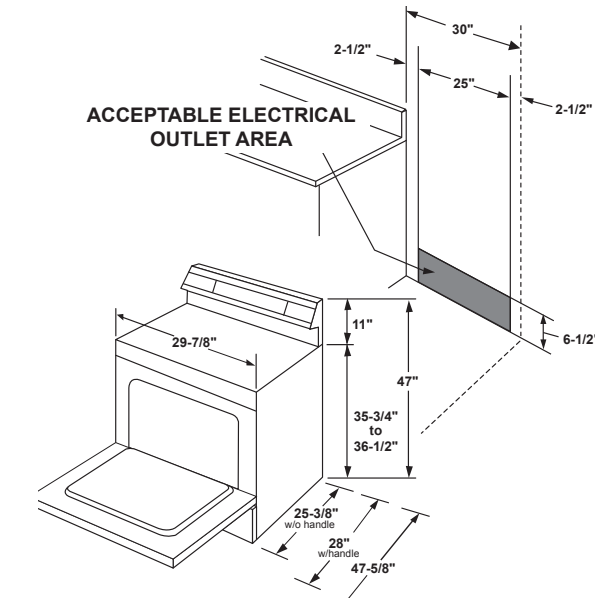

MODELS JBS86 AND JB860

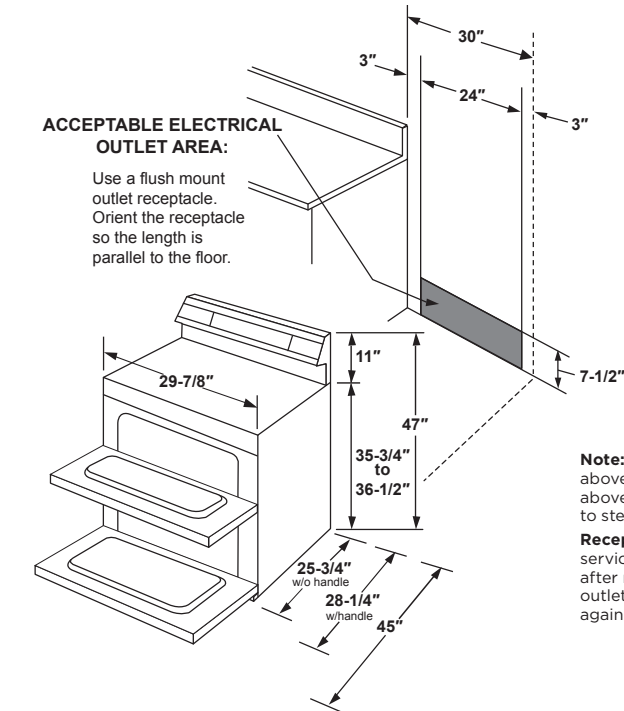





30" AND 24" FREE-STANDING COIL AND SMOOTHTOP ELECTRIC RANGES

	GE						
	JB258RM JB258DM	JB256RM JB256DM	JB480SM JB480DM	JBS460DM	JBS360RM JBS360DM	JBS160DM	24" RANGE JAS640RM
UFAS/ADA compliant California Prop 65	●	●	●/●	●/●	●	●	●
FEATURES							
Capacity (cu. ft.) upper/lower	5.3	5.0	5.0	5.0	5.0	5.0	2.9
Cleaning system	Self-clean	Self-clean	Self-clean	Traditional	Traditional	Traditional	Self-clean
Cooking technology	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional
CONTROLS							
Sabbath mode*	●	●	●	●	●		●
Control lock capability	●	●		●	●		
Electronic oven controls	●	●		●	●		●
Delay bake	●	●					●
Digital temperature display	●	●		●	●		●
Hot surface lights	2	1	1	●	1		1
Self-clean latch	Auto	Auto	Auto	●			Auto
COOKTOP							
Element—left front	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,500W	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,200W
Element—left rear	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W
Element—right front	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W
Element—right rear	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,500W	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,200W
Drip bowls	Black Chrome, Black	Black Chrome, Black	Black Chrome, Black	Chrome, Black	Black Chrome, Black	Chrome, Black	
OVEN							
Audible preheat signal	●	●					●
Drawer	Storage	Storage	Storage	Storage	Storage	Storage	Storage
Dual-element bake	●	●	●	●	●	●	
Interior oven light	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent
Oven racks	2	2	2	2	2	2	2
Bake element	6-pass	4-pass	4-pass	4-pass	4-pass	4-pass	4-pass
Broil element	6-pass	4-pass	4-pass	4-pass	4-pass	4-pass	4-pass
APPEARANCE							
Backguard**	SS overlay CM	SS with black CM	SS with black CM	CM	SS with black CM	CM	SS overlay Black
Ceramic-glass cooktop			Black				
Color appearance**	SS WW, CC, BB	SS WW, BB	SS with black WW, BB	WW, BB	SS with black WW, BB	WW, CC, BB	SS
Handle color**	SS CM	SS CM	SS CM	CM	SS CM	CM	SS
Handle design	Designer-style	Designer-style	Designer-style	D-shaped	Designer-style	Designer-style	Designer-style
Knobs—color**	BB CM	BB CM	BB CM	CM	BB CM	CM	SS
Oven interior	Gray	Gray	Gray	Gray	Gray	Gray	Gray
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	175	170	172	150	160	150	135
Overall oven interior dimensions (WxHxD in inches)	24-1/8 x 19-1/2 x 19-3/8	23-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	22-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	19 x 15-3/8 x 17-1/8
POWER/RATINGS							
Bake wattage	3,410W	2,585W	2,585W	2,585W	2,585W	2,585W	2,700W
Broil wattage	3,800W	3,410W	3,410W	3,410W	3,410W	3,410W	3,000W
Amp rating 240V/208V	40	40	40	40	40	40	40
KW rating 240V/208V	12.1 / 9.1	11.7 / 8.8	12.1/9.1	10.2/7.7	12.6 / 9.9	12.6/9.9	10.5/8.1

\*See use and care manual for required accessory.  
\*\*SS=Stainless, WW=White with white glass door, CC=Bisque with bisque glass door, BB=Black with black glass door, CM=Color-matched.

DIMENSIONS AND INSTALLATION INFORMATION

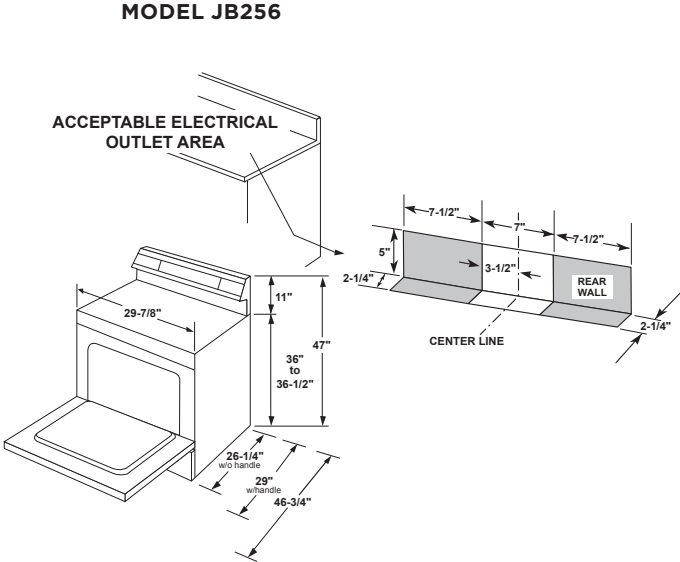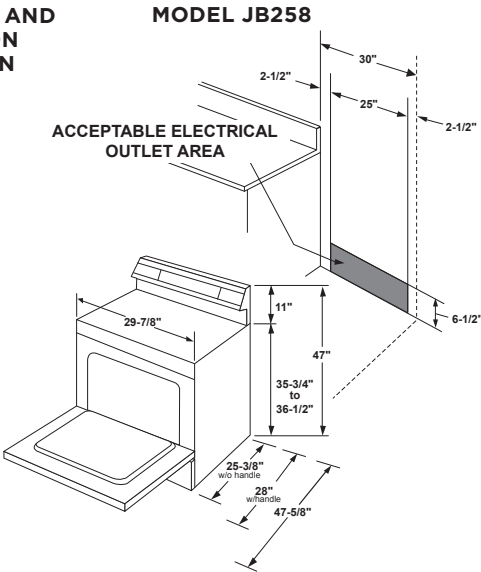


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


30" AND 24" FREE-STANDING COIL AND SMOOTHTOP ELECTRIC RANGES

DIMENSIONS AND INSTALLATION INFORMATION

MODELS JBS460, JBS360, JBS160

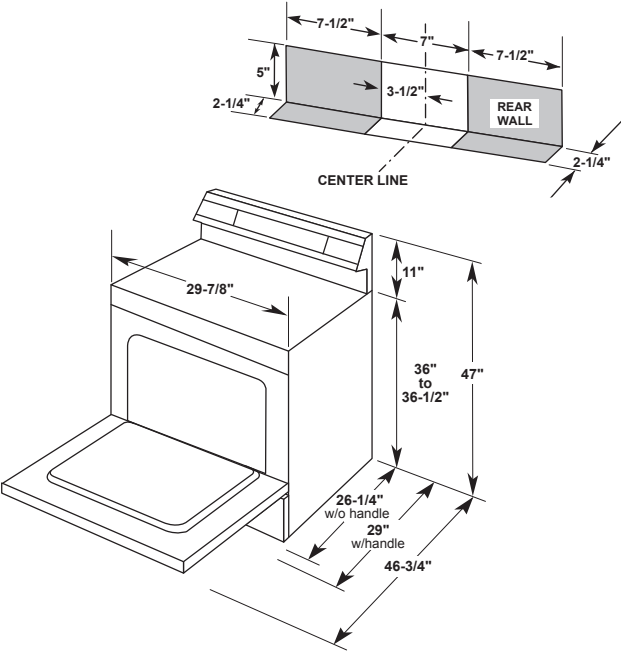

MODEL JB480


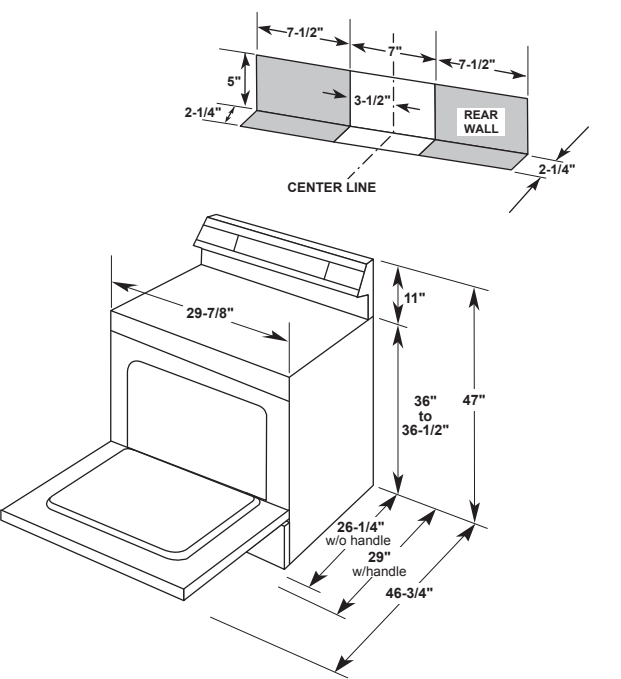


**Note:** This appliance has been approved for 0" spacing to adjacent surfaces above the cooktop. However, a 6" minimum spacing to surfaces less than 15" above the cooktop and adjacent cabinet is recommended to reduce exposure to steam, grease splatter and heat.

**Receptacle locations:** For free-standing ranges, locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against wall.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

MODEL JAS640

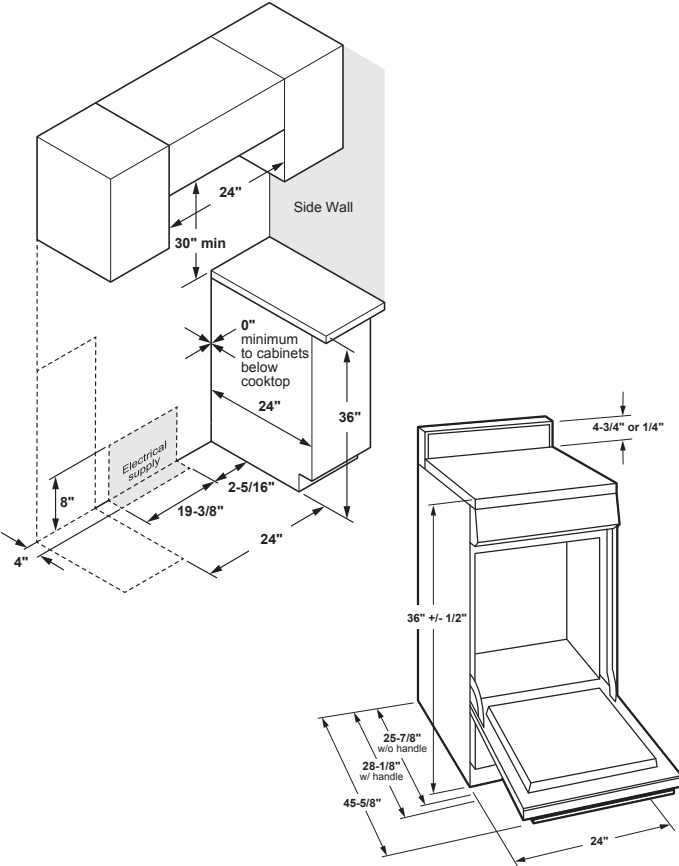

Recommended acceptable electrical outlet area. Orient the electrical receptacle so the length is parallel to the floor.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories



30" FREE-STANDING GAS RANGES

	GE PROFILE™			GE		
	PGB965YP PGB965BP	P2B935YP P2B935BP	PGB935YP PGB935BP	JGBS86SP	JGB735SP JGB735EP JGB735FP JGB735DP	JGB660YP JGB660SP JGB660EP JGB660FP JGB660DP
California Prop 65	●	●	●	●	●	●
FEATURES						
Capacity (upper/lower)	2.5/4.3	5.7	5.6	2.5/4.3	5.0	5.0
Cleaning system	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Self-clean
Cooking technology	Upper: Traditional Lower: True Convection	Convection	Convection	Upper: Traditional Lower: Convection	Convection	Traditional
CONTROLS						
Sabbath mode*	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●
Electronic oven controls	●	●	●	●	●	●
WiFi Connect**	●	●	●		●	
Delay bake	●	●	●		●	●
Digital temperature display					●	●
Electronic clock & timer					●	●
Ignition	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Self-clean latch	●	●	●		Manual	Manual
COOKTOP						
Burner—left front	18,000 BTU Power Boil 5,000 BTU Precise Simmer	21,000 BTU tri-ring burner	21,000 BTU tri-ring burner	15,000 BTU 5,000 BTU Precise Simmer	18,000 BTU Power Boil 5,000 BTU Precise Simmer	18,000 BTU Power Boil 5,000 BTU Precise Simmer
Burner—left rear		5,000 BTU	5,000 BTU			
Burner—right front	20,000 BTU tri-ring	18,000 BTU Power Boil	18,000 BTU Power Boil	15,000 BTU	9,500 BTU	9,500 BTU
Burner—right rear	9,500 BTU	9,500 BTU	9,500 BTU	12,000 BTU	12,000 BTU	12,000 BTU
Burner—center	10,000 BTU dual oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Deep-recessed cooktop	●	●	●		●	●
Griddle	Reversible cast-iron griddle/grill	Reversible cast-iron griddle/grill	Reversible cast-iron griddle/grill	Non-stick	Non-stick	
Melt/Simmer	●	●	●		●	●
OVEN						
Audible preheat signal	●	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	●	
Convection bake	●	●	●	●	●	
Convection roast	●	●	●	●		
Drawer		Storage	Storage		Storage	Storage
In-oven broiling						●
Interior oven light	Incandescent				Incandescent	Incandescent
Oven racks		3	3	3	2	2
Temperature probe	●	●	●			
APPEARANCE						
Backguard***	SS wrap/TS	SS wrap/TS	SS wrap/TS	SS wrap	SS wrap/DS/ES/CM	FS/SS wrap/ES/DS/CM
Color appearance***	FS/TS	FS/TS	FS/TS	SS	SS with gray/TS/ES/DS/ WW, BB	SS with gray/ES/DS/ WW, BB
Cooktop**	DD/DD	DD/DD	DD/DD	SS	DD/DD/DD/CM	DD/DD/DD/DD/CM
Grates	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge
Grate material	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
Handle color***	SS/TS	SS/TS	SS/TS	SS	SS/SS/TS/CM	FS/SS/SS/TS/CM
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs-color***	SS/TS	SS/TS	SS/TS	SS	SS/SS/CM	FS/SS/SS/TS/CM
One-piece upswept cooktop					●	●
Oven interior	Black	Black	Black	Black	Gray	Gray
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	242	225	225	225	210	215
Overall oven interior dimensions (WxHxD in inches)	Upper: 24 x 9-1/2 x 19-1/8 Lower: 24 x 15 x 20-5/8	24 x 19 x 20-5/8	24 x 19 x 20-5/8	Upper: 24 x 9-1/2 x 19-1/8 Lower: 24 x 15 x 20-5/8	24 x 19 x 19	24 x 19 x 19
POWER/RATINGS						
Bake (000's BTU) Nat/LP	Upper: 7.0/7.0 Lower: 14.0/13.5	16.0/16.0	16.0/16.0	Upper: 7.0/7.0 Lower: 14.0/13.5	16.0/16.0	16.0/16.0
Broil (000's BTU) Nat/LP	Upper: 120V/120V Lower: 16.5/13.5	10.0/10.0	10.0/10.0	Upper: 120V/120V Lower: 16.5/13.5	13.5/12.0	13.5/12.0
Burners (000's BTU) LP	18.0/5.0/18.0/9.5/8.0	15.0/10.0/9.1/5.0/8.0	15.0/10.0/9.1/5.0/ 8.0	18.0/5.0/18.0/12.0/8.0	18.0/5.0/9.5/12.0/8.0	18.0/5.0/9.5/12.0/8.0
Gas range electrical rating+	120V, 60Hz, 15A	120V, 60Hz, 15A	120V, 60Hz, 15A	120V, 60Hz, 15A	120V, 60Hz, 15A	120V, 60Hz, 15A
LP conversion kit (included)	●		●	●	●	●

\*See use and care manual for required accessory.  
\*\*WiFi router required.  
\*\*\*SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, BB = Black with black glass door,  
CM = Color-matched, DD = Dark Dorian.  
+15A requires a dedicated circuit.  
Factory set for natural gas. A set of LP orifices is included with each range for LP conversion.




All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Gas self-clean range Anti-Tip bracket (part no. 205C1714P001)





30" FREE-STANDING GAS RANGES


DOUBLE OVEN DIMENSIONS  
MODELS PGB965, JGBS86

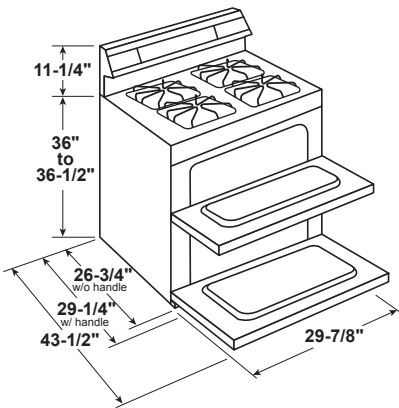


GAS PIPE AND ELECTRICAL  
OUTLET LOCATIONS DOUBLE  
AND SINGLE OVEN MODELS

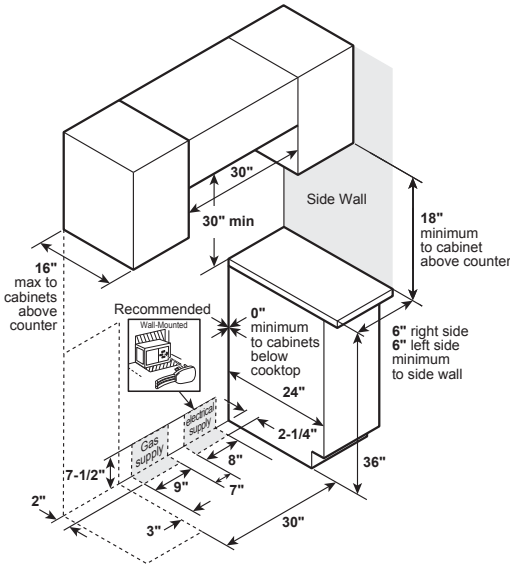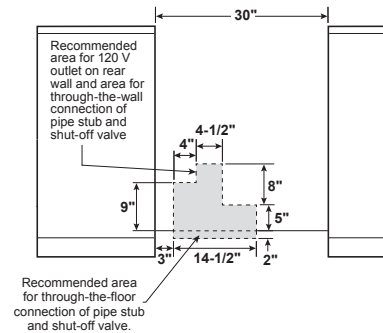


SINGLE OVEN DIMENSIONS  
MODELS P2B935, PGB935

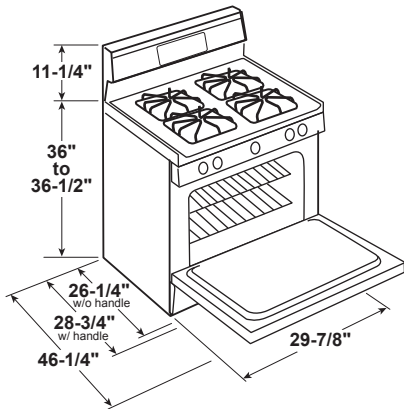

GAS PIPE AND ELECTRICAL  
OUTLET LOCATIONS  
MODEL P2B935

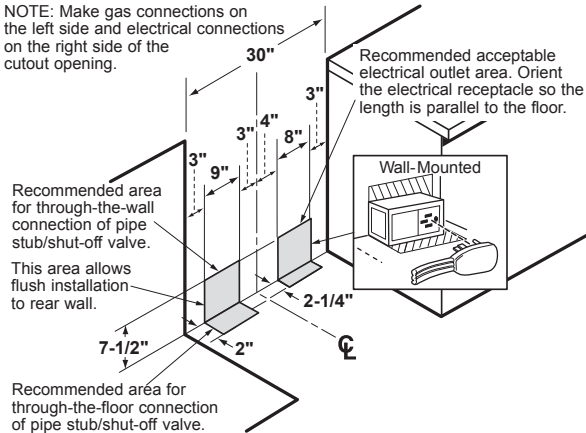

INSTALLATION INFORMATION  
DOUBLE AND SINGLE OVEN MODELS

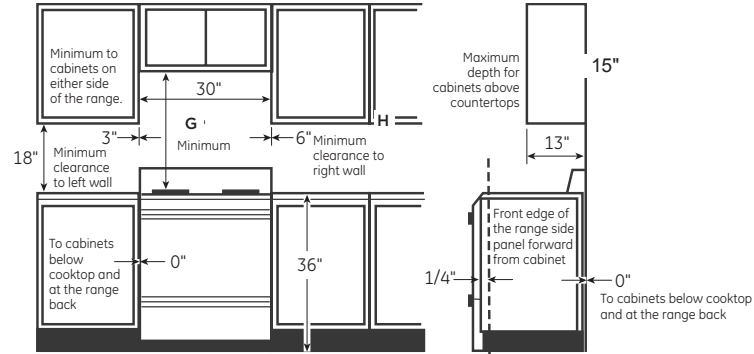

MODEL	G	H
P2B935	6"	6"
PGB935	6"	6"
JGB660	6"	3"

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




30" AND 24" FREE-STANDING GAS RANGES

	GE								24" RANGE
	JGB645SEK	JGB450DEK	JGB635REK JGB635DEK	JGBS66REK JGBS66EEK JGBS66FEK JGBS66DEK	JGBS61RP JGBS61DP	JGBS60REK JGBS60DEK	JGBS30REK JGBS30DEK	JGBS10DEM	JGAS64ORM
UFAS/ADA compliant California Prop 65	●	●/●	●	●	●	●	●	●/●	●/●
FEATURES									
Capacity (upper/lower)	5.0	5.0	5.0	5.0	5.0	4.8	4.8	4.8	2.9
Cleaning system	Self-clean	Self-clean	Self-clean	Steam Clean	Standard-clean	Standard-clean	Standard-clean		
Cooking technology	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional
CONTROLS									
Sabbath mode*	●		●	●	●	●	●	●	●
Control lock capability			●	●	●	●			
Electronic oven controls	●		●	●	●	●			
Delay bake			●	●	●	●			
Digital temperature display	●		●	●	●	●			
Electronic clock & timer	●		●	●	●	●		●	
Ignition	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Self-clean latch	●	●	●						
COOKTOP									
Burner—left front	15,000 BTU	9,500 BTU	9,500 BTU	15,000 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,100 BTU	9,500 BTU
Burner—left rear	5,000 BTU	9,500 BTU	9,500 BTU	5,000 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,100 BTU	9,500 BTU
Burner—right front	9,500 BTU	13,000 BTU	13,000 BTU	9,500 BTU	13,000 BTU	13,000 BTU	13,000 BTU	9,100 BTU	15,000 BTU
Burner—right rear	12,000 BTU	5,000 BTU	5,000 BTU	12,000 BTU	5,000 BTU Precise Simmer	5,000 BTU	5,000 BTU	9,100 BTU	5,000 BTU
Burner—center				10,000 BTU					
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed	
Deep-recessed cooktop	●			●					
Griddle				Non-stick					
OVEN									
Audible preheat signal			●	●	●	●			
Drawer	Storage	Storage	Storage	Broiler	Broiler	Broiler	Broiler	Broiler	Storage
In-oven broiling	●	●	●						●
Interior oven light	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent
Oven racks	2	2	2	2	2	2	2	2	2
APPEARANCE									
Backguard**	SS	CM	SS CM	SS CM DS CM	SS CM	SS CM	SS CM	CM	CM
Color appearance**	SS	WW	SS with black WW, BB	SS ES DS WW, BB	SS with black WW, BB	SS WW, CC, BB	SS WW, BB	WW, BB	SS with black
Grates	2-piece, edge-to-edge black matte	Black matte	Black matte	Edge-to-edge black matte	Edge-to-edge black matte	Black matte	Black gloss	Black gloss	Black matte
Grate material	Cast iron	Heavy steel	Heavy steel	Cast iron	Cast iron	Heavy steel	Heavy steel	Steel	Cast iron
Handle color**	SS	CM	SS CM	SS SS TS CM	SS CM	SS CM	SS CM	CM	SS
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—color**	CM	CM	BB CM	SS SS TS CM	SS CM	BB BB CM	BB CM	CM	SS
One-piece upswept cooktop	●	●	●	●	●	●	●	●	●
Oven interior	Gray	Gray	Gray	Gray	Gray	Gray	Gray	Gray	Gray
WEIGHTS & DIMENSIONS									
Approx. shipping wt. (lbs.)	210	210	210	172	172	172	171	165	120
Overall oven interior dimensions (WxHxD in inches)	24 x 19 x 19	24 x 18-1/2 x 19	24 x 19 x 19	24 x 18-1/2 x 19	24 x 18-1/2 x 19	24 x 19 x 19	24 x 18-1/2 x 19	24 x 18-1/2 x 19	19 x 15-3/8 x 17-1/8
POWER/RATINGS									
Bake (000's BTU) Nat./LP	16.0/16.0	16.0/16.0	16.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	13.0/13.0
Broil (000's BTU) Nat./LP	13.5/12.0	13.5/12.0	13.5/12.0	15.0 12.0	18.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	13.0/13.0
Burners (000's BTU) LP	12.0	9.5	9.5	15.0	(1) 15.0	9.5	(1) 12.0	8.0	9.5
	9.5	9.5	9.5	12.0	(1) 12.0	9.5	(2) 9.5	8.0	9.5
	15.0	11.0	11.0	5.0	(1) 9.5	11.0	(1) 5.0	8.0	15.0
Gas range electrical rating†	5.0	5.0	5.0	8.0	(1) 5.0	5.0	(1) 5.0	8.0	5.0
	120v;	120v;	120v;	120v;	120v;	120v;	120v;	120v;	120v;
	60Hz/ 15A	60Hz/ 15A	60Hz/ 15A	60Hz/ 15A	60Hz/ 15A	60Hz/ 15A	60Hz/ 15A	60Hz/ 15A	60Hz, 15A
LP conversion kit (included)	●	●	●	●	●	●	●	●	●

\*See use and care manual for required accessory.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door,  
CM = Color-matched.  
†15A requires a dedicated circuit.  
Factory set for natural gas. A set of LP orifices is included with each range for LP conversion.


30" AND 24" FREE-STANDING GAS RANGES

DIMENSIONS

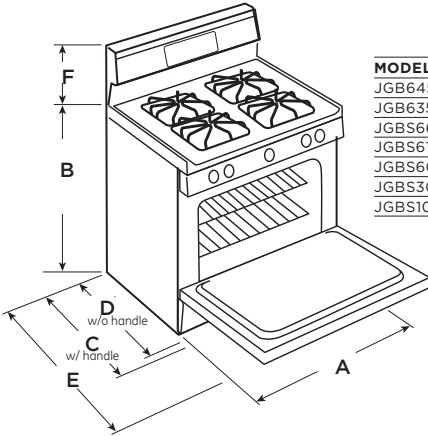


MODEL	A	B	C	D	E	F
JGB645	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	11-1/4"
JGB635	29-7/8"	36" to 36-1/4"	28-3/4"	26-1/4"	46-1/4"	10-1/4"
JGBS66	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	11-1/4"
JGBS61	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	11-1/4"
JGBS60	29-7/8"	36" to 36-1/4"	28-3/4"	26-1/4"	46-1/4"	10-1/4"
JGBS30	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	10-1/4"
JGBS10	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	10-1/4"

DIMENSIONS (IN INCHES)  
MODEL JGAS640

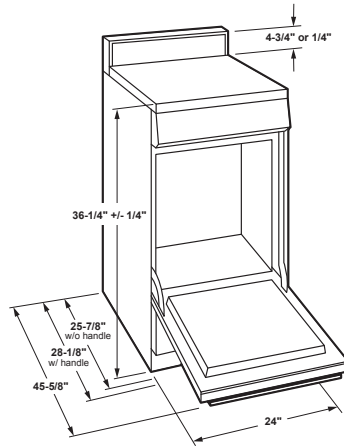


GAS PIPE AND ELECTRICAL OUTLET LOCATIONS

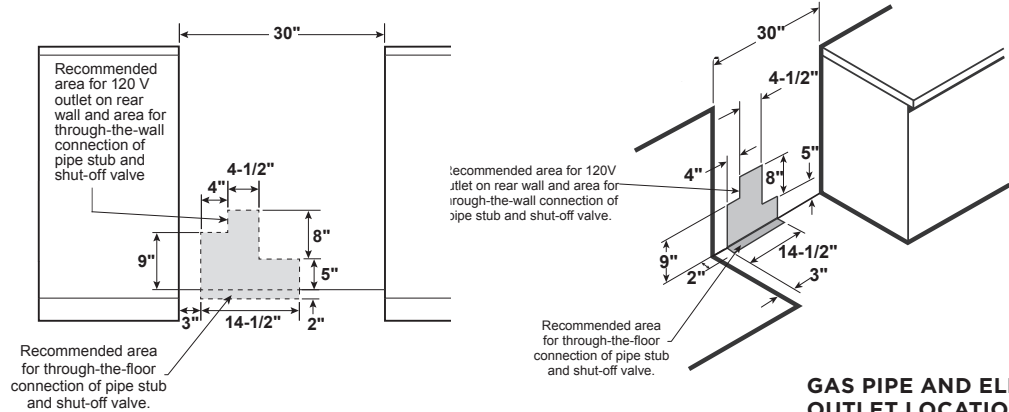

GAS PIPE AND ELECTRICAL  
OUTLET LOCATIONS  
MODEL JGAS640

INSTALLATION INFORMATION

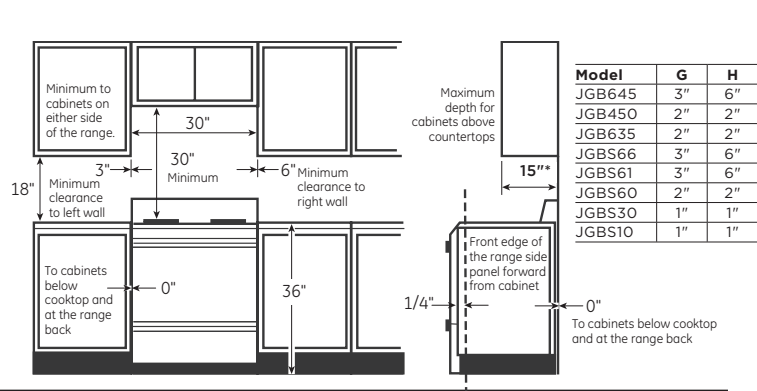

Optional gas range accessory drip pans for sealed and standard traditional burner models are available at additional cost.

Will not work on continuous grate models. To order these accessory drip pans, call toll-free 800-626-2000.

Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data. There must be a minimum of 30" between unprotected cabinets above a free-standing gas range and countertops.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



To prevent drafts from affecting burner operation, seal all openings in floor and wall.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Gas self-clean range Anti-Tip bracket (part no. 205C1714P001)





ADVANTIUM® OVER-THE-RANGE OVENS

GE PROFILE™		
PSA9240SF		
PSA9120SF*		
AHAM certified	●	●
California Prop 65	●	●
FEATURES		
Capacity (cu. ft.)	1.7	1.7
Watts—microwave (IEC-705 test procedure)	975 W	925 W
Cooking modes	Speedcook	●
	True European Convection	●
	Microwave	●
	Warming	●
CONTROLS		
Sensor controls	Beverage	●
	Defrost: Weight/Time	●
	Popcorn	●
	Potato	●
	Reheat	●
CONTROLS TOUCHPAD		
"Add 30 seconds" button		
Control lockout		
Custom recipe saver		
Electronic touch controls		
Preprogrammed menu items		
OVEN		
Interior/cooktop lighting	Halogen	Halogen
Oven racks	2 (2 positions)	2 (2 positions)
Turntable	●	●
Turntable diameter (in.)	13-1/2	13-1/2
APPEARANCE		
Color appearance**	SS with gray	SS with gray
Handle color**	SS	SS
Handle design	Designer-style	Designer-style
Oven interior**	SS	SS
Touchpad	Gray	Gray
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	104	94
Overall oven interior dims. (WxHxD in inches)	21-5/9 x 9-6/15 x 14-1/4	21-5/9 x 9-6/15 x 14-1/4
POWER/RATINGS		
Exhaust vent fan	300 CFM	300 CFM
Input Volt/Hertz	240/208V/60Hz	120V/60Hz
Input Amps/Watts (max.)	30/6,300	15/1,800
ACCESSORIES		
Recirculating charcoal filter kit	JX81D (Included)	JX81D (Included)
36" filler kit	JX36B	JX36B
15" cabinetry bump kit	JX15BUMP	JX15BUMP

\*Certification in process at time of printing. Please confirm latest status.  
\*\*SS = Stainless.

ADVANTIUM OVER-THE-RANGE OVEN DIMENSIONS  
MODELS PSA9240 AND PSA9120

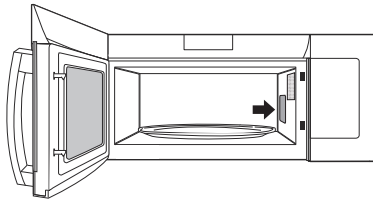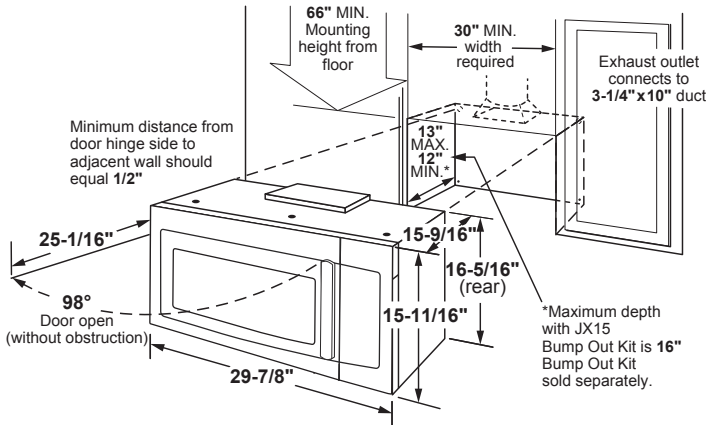

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. This cover is not to be removed or altered. Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

**IMPORTANT:** PLEASE READ CAREFULLY. FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROPERLY GROUNDED TO AVOID SEVERE OR FATAL SHOCK.

DO NOT, UNDER ANY CIRCUMSTANCES, CUT, DEFORM, OR REMOVE ANY OF THE PRONGS FROM THE POWER CORD. DO NOT USE WITH AN EXTENSION CORD.


NEMA 14-30R Wall Receptacle  
Ensure proper ground exists before use.

OVER-THE-RANGE MICROWAVE OVENS


GE PROFILE				
PVM9179SK PVM9179BL PVM9179EK PVM9179FL PVM9179DK				
PVM9005SJ PVM9005BL PVM9005EJ PVM9005FM				
PNM9216SK				
PVM9215SK				
AHAM certified	●	●	●	●
California Prop 65	●	●	●	●
FEATURES				
Capacity (cu. ft.)	1.7	2.1	2.1	2.1
Watts—microwave (IEC-705 test procedure)	950 W	1,050 W	1,000 W	1,000 W
Cooking modes	Microwave	●	●	●
	Convection	●	●	●
	Fast Cook	●	●	●
Factory-set recirculation				
CONTROLS				
Chef Connect				
Sensor controls	Beverage	●	●	●
	Defrost—Weight/Time	●	●	●
	Popcorn	●	●	●
	Potato	●	●	●
	Reheat	●	●	●
CONTROLS TOUCHPAD				
"Add 30 seconds" button				
Control lockout				
Electronic touch controls				
Mute On/Off				
My Cycle				
Steam clean				
OVEN				
Interior/cooktop lighting	Halogen/LED	Halogen	Halogen/LED	Halogen/LED
Oven racks	1 convection, 1 wire	2 positions	●	●
Turntable	●	●	●	●
Turntable diameter (in.)	13-3/5	14-1/4	14-1/5	14-1/5
APPEARANCE				
Color appearance*				
Handle color*				
Handle design				
Oven interior*				
Touchpad*				
WEIGHTS & DIMENSIONS				
Approx. shipping wt. (lbs.)	81	65	66	66
Overall oven interior dimensions (WxHxD in inches)	21-5/8 x 9-3/4 x 14-1/4	23-5/32 x 10-5/32 x 15-3/16	21-15/16 x 11-5/8 x 14-9/16	21-15/16 x 11-5/8 x 14-9/16
POWER/RATINGS				
Exhaust vent fan	300 CFM	400 CFM	400 CFM	400 CFM
Input Volt/Hertz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz
Input Amps/Watts (max.)	15/1,550	15/1,700	15/1,580	15/1,580
ACCESSORIES				
36" filler kit	JX36B	JX36B	JX36B	JX36B
15" cabinetry bump kit	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP

\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, CC = Bisque on bisque, BB = Black on black, CM = Color-matched.

OVER-THE-RANGE MICROWAVE OVEN DIMENSIONS  
MODEL PVM9005

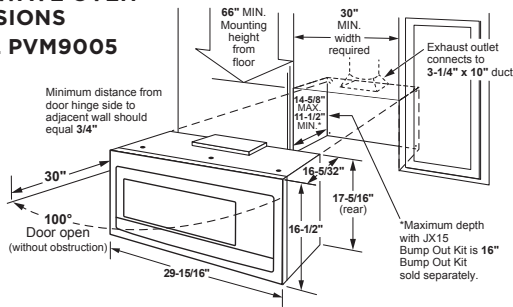

OVER-THE-RANGE MICROWAVE OVEN DIMENSIONS  
MODELS PVM9179, PVM9215 AND PNM9216

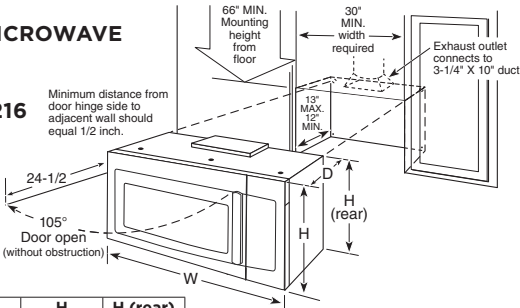

MODEL	W	D	H	H (rear)
PVM9179	29-7/8"	15-1/2"	15-3/4"	16-1/2"
PVM9215	29-3/4"	15-1/2"	16"	16-1/2"
PNM9216	29-3/4"	15-1/2"	16"	16-1/2"




OVER-THE-RANGE MICROWAVE OVENS

	GE						
	JNM7196SK	JVM7195SK	JVM6175SK*	JVM6172SK* JVM6172DK*	JVM3160RF	JNM3163RJ*	JVM3162RJ*
	JNM7196BL	JVM7195BL	JVM6175YK*		JVM3160EF	JNM3163DJ*	JVM3162DJ*
	JNM7196FL	JVM7195FL	JVM6175BL*		JVM3160DF	JNM3163DJ*	JVM3162DJ*
AHAM certified	●	●	●	●	●	●	●
California Prop 65	●	●	●	●	●	●	●
FEATURES							
Capacity (cu. ft.)	1.9	1.9	1.7	1.7	1.6	1.6	1.6
Watts—microwave (IEC-705 test procedure)	1,000 W	1,000 W	1,000 W	1,000 W	1,000 W	1,000 W	1,000 W
Cooking mode	Microwave	●	●	●	●	●	●
Factory-set recirculation	●	●	●	●	●	●	●
CONTROLS							
Convenience controls	Beverage			●	●	●	●
	Cook time				●	●	●
	Defrost Weight/Time			●	●	●	●
	Popcorn			●	●	●	●
	Potato			●	●	●	●
Sensor controls	Reheat			●	●	●	●
	Beverage	●	●	●			
	Melt	●	●	●			
	Defrost Weight/Time	●	●	●			
	Popcorn	●	●	●			
Electronic touch controls	Potato	●	●	●		●	●
	Reheat	●	●	●			
Mute On/Off							
OVEN							
Interior/cooktop lighting	Incandescent/Halogen	Incandescent/Halogen	Incandescent/Halogen	Incandescent/Halogen	Incandescent	Incandescent	Incandescent
Turntable	●	●	●	●	●	●	●
Turntable diameter (in.)	14-1/5	14-1/5	12-4/5	12-4/5	13-1/2	12-1/2	12-1/2
APPEARANCE							
Color appearance**	SS with gray TS DS WW, BB	SS with gray TS ES DS WW, BB	SS with gray FS TS ES WW, BB	SS with gray WW, BB	SS with black ES WW, CC, BB	SS with black WW,BB	SS with black WW,BB
	SS appearance Black Stainless TS CM	SS appearance Black Stainless SS appearance TS CM	SS appearance SS appearance Black Stainless SS appearance CM	SS appearance CM	SS appearance SS appearance CM	SS appearance CM	SS appearance CM
Handle color**	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Handle design	Easy-clean	Easy-clean	White	White	Epoxy white	Epoxy white	Epoxy white
Oven interior**	Gray Gray DD White, Black	Gray Gray DD Gray White, Black	Gray Gray DD White, Black	Gray White, Black	Black Gray White, Bisque, Black	Black White, Black	Black White, Black
Touchpad**							
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	66	66	66	66	66	63	63
Overall oven interior dimensions (WxHxD in inches)	21-15/16 x 11-5/8 x 14-9/16	21-15/16 x 11-5/8 x 14-9/16	20-11/16 x 10-5/16 x 14-3/16	20-11/16 x 10-5/16 x 14-3/16	18-13/16 x 9-1/4 x 14-13/32	19-1/2 x 10-15/16 x 14-3/16	19-1/2 x 10-15/16 x 14-3/16
POWER/RATINGS							
Exhaust vent fan	400 CFM	400 CFM	300 CFM	300 CFM	300 CFM	300 CFM	300 CFM
Input Volt/Hertz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz
Input Amps/Watts (max.)	15/1,580	15/1,580	15/1,580	15/1,600	15/1,580	14/1,600	14/1,600
ACCESSORIES							
36" filler kit	JX36B	JX36B	JX36B	JX36B	JX36B	JX36B	JX36B
15" cabinetry bump kit	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP

\*Certification in process at time of printing. Please confirm latest status.  
\*\*SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, SA = Silver, WW = White on white, WS = White with stainless accents, CC = Bisque on bisque, BB = Black on black, DD = Dark dorian, CM = Color-matched.  
†Optional for units that are not set as recirculating from the factory.


The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

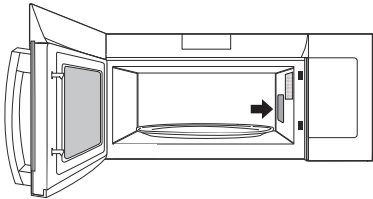

OVER-THE-RANGE MICROWAVE OVENS

OVER-THE-RANGE MICROWAVE OVEN DIMENSIONS  
ALL GE MODELS

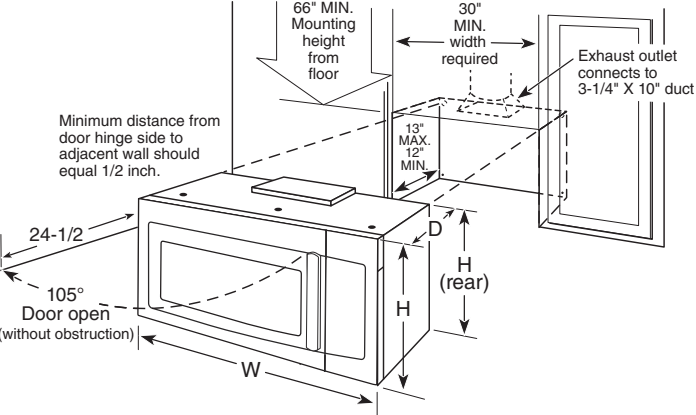


OPTIONAL ACCESSORIES  
(SOLD SEPARATELY)

FILLER PANEL KIT

See below for part numbers.

When replacing a 36" range hood, this kit fills in the additional width to provide a custom built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two 3"-wide filler panels.

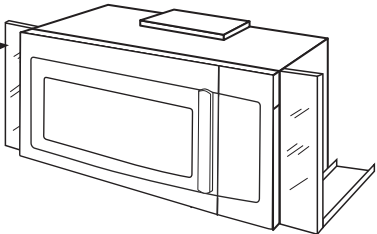

15" CABINETRY BUMP-OUT KIT  
(NOT SHOWN)

To be used for installation with a 15" depth cabinet. Kit is a bracket that increases the depth from the wall by 3".

MODEL	36" FILLER KIT	15" CABINETRY BUMP-OUT KIT
PSA9240SFSS	JX36BSS	JX15BUMPBB
PSA9120SFSS	JX36BSS	JX15BUMPBB
PVM9179BTLS	JX36BTS	JX15BUMPBB
PVM9179SKSS	JX36BSS	JX15BUMPBB
PVM9179EKES	JX36BES	JX15BUMPBB
PVM9179DKWW	JX36BWW	JX15BUMPWW
PVM9179DKBB	JX36BBB	JX15BUMPBB
PVM9005BLTS	JX36B	JX15BUMPBB
PVM9005SJSS	JX36B	JX15BUMPBB
PVM9005EJES	JX36B	JX15BUMPBB
PVM9215SKSS	JX36BSS	JX15BUMPBB
PNM9216SKSS	JX36BSS	JX15BUMPBB
JNM7196BLTS	JX36BTS	JX15BUMPBB
JNM7196SKSS	JX36BSS	JX15BUMPBB
JNM7196DKWW	JX36BWW	JX15BUMPWW
JVM7195BTLS	JX36BTS	JX15BUMPBB
JNM7196DKBB	JX36BBB	JX15BUMPBB
JVM7195SKSS	JX36BSS	JX15BUMPBB
JVM7195EKES	JX36BES	JX15BUMPBB
JVM7195DKWW	JX36BWW	JX15BUMPWW
JVM7195DKBB	JX36BBB	JX15BUMPBB

MODEL	W	D	H	H (REAR)
JNM7196/JVM7195	29-3/4"	15-1/2"	16"	16-1/2"
JVM6175	29-7/8"	15"	15-7/8"	16-1/2"
JVM6172	29-7/8"	15"	15-7/8"	16-1/2"
JNM3184	29-7/8"	16-7/16"	15-1/8"	16-1/8"
JNM3161/JVM3160	29-7/8"	15-1/4"	15-3/4"	16-1/2"
JNM3163/JVM3162	29-7/8"	15-7/8"	16"	16-7/16"

VENTILATION OPTIONS

The over-the-range convection/microwave and microwave ovens are designed for adaptation to the following three types of ventilation:

**Outside exhaust** (Vertical—as shown above)

**Recirculating** (Non-vented ductless—see Filter Kit Drawing, order JX81D, JX81H, JX81J, JX81L or JX81C)

Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above over-the-range microwave/convection and microwave ovens. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with product.

**Important:** When installing these ovens over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

MODEL	36" FILLER KIT	15" CABINETRY BUMP-OUT KIT
JVM6175BLTS	JX36BTS	JX15BUMPBB
JVM6175SKSS	JX36BSS	JX15BUMPBB
JVM6175EKES	JX36BES	JX15BUMPBB
JVM6175DKWW	JX36BWW	JX15BUMPWW
JVM6175DKBB	JX36BBB	JX15BUMPBB
JVM6172SKSS	JX36BSS	JX15BUMPBB
JVM6172DKWW	JX36BWW	JX15BUMPWW
JVM6172DKBB	JX36BBB	JX15BUMPBB
JNM3163RJSS	JX36BSS	JX15BUMPBB
JNM3163DJWW	JX36BWW	JX15BUMPWW
JNM3163DJBB	JX36BBB	JX15BUMPBB
JVM3162RJSS	JX36BSS	JX15BUMPBB
JVM3162DJWW	JX36BWW	JX15BUMPWW
JVM3162DJBB	JX36BBB	JX15BUMPBB
JNM3161MFSA	JX36B	JX15BUMPBB
JVM3160RFSS	JX36B	JX15BUMPBB
JVM3160EFES	JX36B	JX15BUMPBB
JVM3160DFWW	JX36B	JX15BUMPWW
JVM3160DFCC	JX36B	JX15BUMPWW/BB
JVM3160DFBB	JX36B	JX15BUMPBB

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.




MICROWAVE OVENS

	GE PROFILE™	
	EXTRA-LARGE	
	PES7227SL PES7227BL PES7227EL PES7227FM PES7227DL	JES2251SJ
UFAS/ADA compliant†	●/●	●
California Prop 65	●	●
CAPACITY		
Oven cavity (cu. ft.)	2.2	2.2
FEATURES		
Watts (IEC-705 test procedure)	1,100	1,200
Inverter technology		●
Electronic touch controls	●	●
Scrolling display with Help pad	●	●
Demo mode	●	
Electronic digital display with clock	●	●
Display On/Off	●	●
Sensor controls	Popcorn	
	Beverage	
	Lunch/Snack	●
	Reheat	●
	Vegetable	●
	Potato	●
Express Cook	Breakfast	●
	Dinner plate	●
Express Cook	1-6 min.	
Warming control		●
Instant On controls	●	
Time Cook	I & II	I & II
Add 1 Minute		●
"Add 30 seconds" button	●	
Auto/Time Defrost		●
Weight/Time Defrost	●	
Power levels	10	10
Turntable	Recessed	●
Turntable diameter (in.)	16-1/2	16
Timer on/off	●	●
Delay Start		●
Cooking complete reminder	●	
Control lockout	●	●
APPEARANCE		
Color appearance*	SS TS ES DS	SS
	WW, BB	
	Gray Gray Gray Gray CM	SS
Case color*		
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)	51	40
Dimensions (WxHxD in inches)	17-5/16 x 11-1/16 x 19-1/16	18-1/2 x 11 x 18-1/2
	24-1/8 x 14 x 19-3/4	24 x 13-3/4 x 19-1/2
POWER/RATINGS		
Input Volt/Hz	120/60	120/60
	Watts	1,650
	Amperage	13.9
Electric input @ 120V		
ACCESSORIES		
Cooking guide label	●	●
Right-angle plug	●	

†Model can be UFAS/ADA compliant in countertop or built-in configuration. For built-in, please see information for individual model.  
\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*Exterior dimensions: height includes feet, depth does not include handle.

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

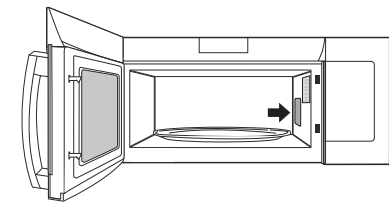

	GE		
	EXTRA-LARGE	FAMILY-SIZE	
	JES2051SN JES2051DN	JES1657SM JES1657BM JES1657DM	JES1460DS
California Prop 65	●	●	●
CAPACITY			
Oven cavity (cu. ft.)	2.0	1.6	1.4
FEATURES			
Watts (IEC-705 test procedure)	1,200	1,150	1,100
Electronic touch controls	●	●	●
Scrolling display with Help pad	●		
Demo mode	●		
Electronic digital display with clock	●	●	●
Display On/Off	●		●
Sensor controls	Popcorn	●	●
	Beverage	●	●
	Reheat	●	●
	Vegetable	●	●
	Potato	●	●
	Chicken/Fish	●	●
Convenience controls		●	
Express Cook	1-6 min.	1-6 min.	1-6 min.
Instant On controls	●	●	●
Time Cook	I & II	I & II	I & II
"Add 30 seconds" button	●	●	●
Auto/Time Defrost	●	●	●
Power levels	10	10	10
Turntable	●	●	Recessed
Turntable diameter (in.)	16	13-5/8	12-5/8
Kitchen timer/Timer on/off	- / ●	- / ●	- / ●
Delay Start/Reminder	●		
Cooking complete reminder	●	●	●
Control lockout	●		●
APPEARANCE			
Color appearance*	SS WW, BB	SS TS WW,BB	WW, BB
	Black CM	SS Black White, Black	CM
Case color*			
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.)	55	44	38
Dimensions (WxHxD in inches)	16-3/4 x 11-1/4 x 18-1/8	16-5/8 x 10-1/4 x 16-3/4	14-3/4 x 9-7/8 x 16-1/4
	23-7/8 x 13-5/8 x 19-1/4	21-3/4 x 12-13/16 x 17-11/16	21-7/8 x 12-1/2 x 16-3/8
POWER/RATINGS			
Input Volt/Hz	120/60	120/60	120/60
	Watts	1,650	1,600
	Amperage	13.9	13.5
Electric input @ 120V			
ACCESSORIES			
Cooking guide label	●	●	●

\*SS = Stainless, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*Exterior dimensions: height includes feet, depth does not include handle.


MICROWAVE OVENS (CONT.)

	GE				
	MID-SIZE				
	JES1145SH JES1145DL JES1145DM	JES1097SM	JES1095SM JES1095BM JES1095DM	JEM3072SH JEM3072DH	JES1072SH JES1072DM
California Prop 65	●	●	●	●	●
CAPACITY					
Oven cavity (cu. ft.)	1.1	0.9	0.9	0.7	0.7
FEATURES					
Watts (IEC-705 test procedure)	950	900	900	700	700
Electronic touch controls	●	●	●	●	●
Electronic digital display with clock	●	●	●	●	●
Convenience controls	●	●	●	●	●
Popcorn	●	●	●	●	●
Beverage	●	●	●	●	●
Reheat	●	●	●	●	●
Vegetable	●	●	●		●
Potato	●	●	●	●	●
Pizza	●	●	●		
Express Cook	1-6 min.	●	●	1-6 min.	1-6 min.
Instant On controls	●	●	●	●	●
Time Cook	I & II	●	●	I & II	I & II
"Add 30 seconds" button	●	●	●	●	●
Auto/Time Defrost	●	●	●	●	●
Power levels	10	10	10	10	10
Turntable	●	●	●	●	●
Turntable diameter (in.)	12-3/4	10.5	10.5	9-5/8	10-3/4
Kitchen timer/Timer on/off	● / -	● / ●	● / ●	- / ●	- / ●
Delay Start/Reminder	- / ●			- / ●	- / ●
Cooking complete reminder	●	- / ●	●	●	●
Control lockout	●			●	●
WiFi Connect		●			
APPEARANCE					
Color appearance*	SS, WW, BB	SS	SS, TS, WW, BB	SS, WW, BB	SS, WW/BB
Case color*	Black, CM, CM	Gray	Gray, Gray, WW, BB	Black, CM	Black, CM
WEIGHTS & DIMENSIONS					
Approx. shipping weight (lbs.)	34	30	30	24	24
Dimensions (WxHxD in inches)	Cavity	13-7/8 x 9-1/2 x 14-1/8	13-2/3 x 8-2/3 x 12-2/5	13-2/3 x 8-2/3 x 12-2/5	12-1/4 x 7-7/8 x 11-5/8
	Exterior**	20-5/16 x 12 x 15-5/8	19 x 11-1/2 x 14-1/2	19 x 11-1/2 x 14-1/2	17-1/4 x 10-1/8 x 13
POWER/RATINGS					
Input Volt/Hz	120/60	120/60	120/60	120/60	120/60
	Watts	1,580	1,050	1,050	1,050
	Amperage	13.7	9.5	9.5	9.3
Electric input @ 120V					
ACCESSORIES					
Cooking guide label	●	●	●	●	●
Optional hanging kit				JXA019K†	
Right-angle plug				●	

\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*Exterior dimensions: height includes feet, depth does not include handle.  
†Part No. JXA019K is available at additional cost.

UNDERCABINET MOUNTING KIT (PART NO. JXA019K) FOR MICROWAVE OVEN MODEL JEM3072 (Sold separately)

Not to be used over a thermal oven.




Undercabinet Installation

Install Spacemaker II microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements. These microwave ovens can be installed on practically any wood or metal cabinets. Installation may vary depending on cabinets.

**Note:** 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

CUTOUT DIMENSIONS

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

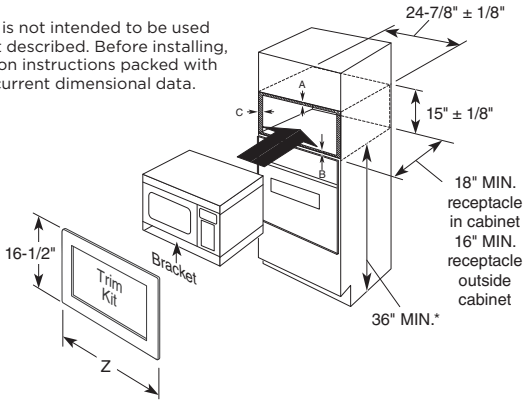

Cabinet overlap requirements	30"	27"
A - Overlap of trim kit over top of cabinet	3/4"	3/4"
B - Overlap of trim kit over bottom of cabinet	5/8"	5/8"
C - Overlap of trim kit over sides of cabinet	2-1/2"	1"

Note: Allow an additional inch of clearance beyond trim frame on all sides  
\*For ADA compliance, the microwave must be installed no higher than 48".




GE PROFILE™ STAINLESS INTERIOR DISHWASHERS

	GE PROFILE			
	PDT785SYNFS PDT785SBNTS	PDT775SYNFS PDT775SBNTS	PDT715SYNFS PDT715SBNTS PDT715SMNES PDT715SFNDS	PDP715SYNFS PDP715SBNTS
ENERGY STAR® certified	●	●	●	●
CEE Tier 1 qualified	●	●	●	●
Energy Factor (EF)	0.8	0.8	0.8	0.8
Normal wash gallons per cycle*	3.5	3.5	3.5	3.5
Kilowatt hrs./yr.	270	270	270	270
FEATURES				
Interior	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tub and door liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Place settings	Up to 16	Up to 16	Up to 16	Up to 16
Front appearance	Top control	Top control	Top control	Top control
Wash system	700 Series	700 Series	700 Series	700 Series
Water filtration	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter
Hard-food disposer	Piranha™	Piranha	Piranha	Piranha
Wash levels	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower
Deep Clean Silverware Jets	●	●	●	●
Automatic temperature control	●	●	●	●
Clean Sensor	●	●	●	●
Rinse Aid dispenser	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment
Clean touch controls	●	●	●	●
Sabbath/door wake-up mode	●	●	●	●
On control indicators	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining
Status lights on door	Washing, Drying, Clean	Washing, Drying, Clean	Washing, Drying, Clean	Washing, Drying, Clean
WiFi	Built-in	Built-in	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)
Touchpads	8	8	8	8
Cycles and options	5, 11	5, 11	5, 11	5, 11
3-digit countdown display	●	●	●	●
Last cycle memory	●	●	●	●
Audible end-of-cycle signal	●	●	●	●
Cycles	1-Hour Wash / Auto Sense / Heavy Wash /Light Wash / Normal Wash	1-Hour Wash / Auto Sense / Heavy Wash /Light Wash / Normal Wash	1-Hour Wash / Auto Sense / Heavy Wash /Light Wash / Normal Wash	1-Hour Wash / Auto Sense / Heavy Wash /Light Wash / Normal Wash
Options				
Bottle Jets	4	4	4	4
Wash Zones	●	●	●	●
Steam PreWash/PreSoak	Steam PreSoak	Steam PreSoak	Steam PreWash	Steam PreWash
Delay Start	1- to 12-hr.	1- to 12-hr.	1- to 12-hr.	1- to 12-hr.
Wash temp—Boost	●	●	●	●
Wash temp—Sanitize**	●	●	●	●
Dry Boost™	Twin Turbo	Twin Turbo	Dry Boost	Dry Boost
Lock controls	●	●	●	●
Racking				
Third Rack	●	Optional	●	●
Rack finish	Silver	Silver	Silver	Silver
Ball-tip tines	●	●	●	●
Upper rack	Easy-touch adjustable full-extension	Easy-touch adjustable full-extension	Easy-touch adjustable full-extension	Easy-touch adjustable full-extension
Fold-down-tine flexibility	2 full-length, upper; 2 multi-position, lower	2 full-length, upper; 2 multi-position, lower	2 multi-position, lower	2 multi-position, lower
Utility shelves		2 Stem Safe		
Angled tines	●	●	●	●
Silverware basket	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers
Handle color	Stainless steel with chrome Black Stainless with chrome	Stainless steel with chrome Black Stainless with chrome	Stainless steel with chrome Black Stainless with chrome Stainless steel with chrome Black Stainless with chrome	Color-matched
Handle design	Profile handle	Profile handle	Profile handle	Pocket handle
DRY				
Hidden vent with fan	●	●	●	●
Twin Turbo Dry Boost	●	●		
Hidden heater	●	●		
Rinse Aid Sensor	●	●		
SOUND INSULATION PACKAGE***	39 dBA	42 dBA	45 dBA	45 dBA
INSTALLATION				
Flush cabinet installation	●	●	●	●
Built-up-floor capable	●	●	●	●
Top-/side-mount brackets	●	●	●	●
GPF3RACK compatible	●	●	●	●
12-ft. drain hose (optional)	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065
Side trim installation strips	●	●	●	●
Front-adjustable rear leveling leg	●	●		
FLOOR PROTECTION				
Leak Defense with Active Flood Protect	●	●	No	No
Active Flood Protect	●	●	●	●
DIMENSIONS HxWxD (in.)	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24
Approx. shipping weight (lbs.)	137	121	118	118

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified to NSF Standard 184.  
\*\*\*dBA levels based on Owens-Corning IEC-60704 lab testing.

GE PROFILE AND GE BUILT-IN DISHWASHER DIMENSIONS

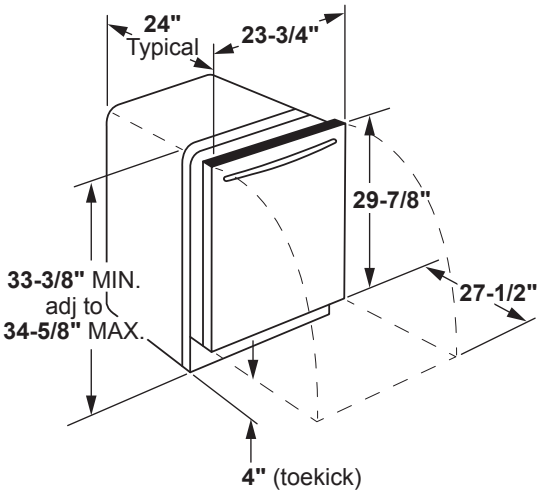

Overall depth including handle: 25.6"

GE Profile (PDT785, PDT775) dishwasher electrical rating

Voltage ..... 120  
Hertz .....60  
Total connected load amperage.....10.2  
Calrod® heater watts max .....1,200/400  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

GE Profile (PDT715, PDP715) dishwasher electrical rating

Voltage.....120  
Hertz.....60  
Total connected load amperage.....6.6  
Calrod heater watts max.....800/500  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.



Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


See pages 224 for warranty information.

GE TOP CONTROL STAINLESS/PLASTIC INTERIOR DISHWASHERS

	GE										
	GDT665SSNSS GDT665SMNES GDT665SFNDS GDT665SGNWW/ GDT665SGNBB	GDP665SYNFS	GDT645SSNSS GDT645SYNFS GDT645SMNES GDT645SFNDS GDT645SGNWW/ GDT645SGNBB	GDP645SYNFS	GDT565SSNSS	GDT635HSMSS GDT635HMMES		GDT630PYMFS (AVAIL 1/2021) GDT630PSMSS GDT630PMMES GDT630PFMDS GDT630PGMWW/ GDT630PGMBB	GDT605PFMDS GDT605PSMSS GDT605PMMES GDT605PGMWW/ GDT605PGMBB	GDT530PSPSS GDT530PMPES GDT530PGPWW/ GDT530PGPBB	GDT535PSMSS
ENERGY STAR® certified	●	●	●	●	●	●		●	●	●	●
CEE Tier 1 qualified	●	●	●	●	●	●		●	●	●	●
Energy Factor (EF)	0.8	0.8	0.8	0.8	0.8	0.8		0.8	0.8	0.8	0.8
Normal wash gallons per cycle*	3.5	3.5	3.5	3.5	3.5	3.5		3.5	3.5	3.5	3.5
Kilowatt hrs./yr.	270	270	270	270	270	270		270	270	270	270
WiFi	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Built-in		Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)
FEATURES											
Interior	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Hybrid stainless steel		Plastic	Plastic	Plastic	Plastic
Door liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel		Plastic	Plastic	Plastic	Plastic
Tub liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Plastic		Plastic	Plastic	Plastic	Plastic
Place settings	Up to 16	Up to 16	Up to 16	Up to 16	Up to 14	Up to 16		Up to 16	Up to 16	Up to 16	Up to 14
Front appearance	Top control	Top control	Top control	Top control	Top control	Top control		Top control	Top control	Top control	Top control
Wash system	600 Series	600 Series	600 Series	600 Series	500 Series	600 Series		600 Series	600 Series	500 Series	500 Series
Water filtration	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter		100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter
Hard-food disposer	Piranha™	Piranha	Piranha	Piranha	Piranha	Piranha		Piranha	Piranha	Piranha	Piranha
Wash levels	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower		Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Middle/lower
Dedicated silverware jets mid-wash arm	●	●	●	●	●	●		●	●	●	●
Automatic temperature control	●	●	●	●	●	●		●	●	●	●
Hot Start	●	●	●	●	●	●		●	●	●	●
Clean Sensor	●	●	●	●	●	●		●	●	●	●
Rinse Aid dispenser	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	With indicator and adjustment		With indicator and adjustment	With indicator and adjustment	With indicator and adjustment	With indicator and adjustment
Clean touch controls	●	●	●	●	●	●		●	●	●	●
Sabbath/door wake-up mode	●	●	●	●	●	●		●	●	●	●
End-of-cycle indicators	●	●	●	●	●	1 “Clean” light, 1 “Sanitized” light		1 “Clean” light, 1 “Sanitized” light	1 “Clean” light, 1 “Sanitized” light	1 “Clean” light, 1 “Sanitized” light	1 “Clean” light, 1 “Sanitized” light
Exterior status LED	Bi-color LED status light on door	Bi-color LED status light on door	Bi-color LED status light on door	Bi-color LED status light on door	Bi-color LED status light on door	Bi-color LED status light on door		Bi-color LED status light on door	Bi-color LED status light on door	Bi-color LED status light on door	Bi-color LED status light on door
Touchpads	8	8	8	8	6	8		8	8	8	6
Cycles/Options	5, 11	5, 11	5, 11	5, 11	5, 7	4		4	4	4	4
3-digit countdown display	●	●	●	●	●	●		●	●	●	●
Last cycle memory	●	●	●	●	●	●		●	●	●	●
Audible end-of-cycle signal	●	●	●	●	●	●		●	●	●	●
Cycles	1 Hour Wash/Auto Sense/Heavy Wash/Light Wash/Normal Wash	1 Hour Wash/Auto Sense/Heavy Wash/Light Wash/Normal Wash	1 Hour Wash/Auto Sense/Heavy Wash/Light Wash/Normal Wash	1 Hour Wash/Auto Sense/Heavy Wash/Light Wash/Normal Wash	1 Hour Wash/Heavy Wash/Light Wash/Normal Wash/Rinse	1-Hr./Auto Sense/Heavy/Normal		1-Hr./Auto Sense/Heavy/Normal	1-Hr./Auto Sense/Heavy/Normal	1-Hr./Auto Sense/Heavy/Normal	Heavy/Normal/1-hr/Rinse
Options											
Bottle Jets	4	4	4	4		4		4	4		
Wash Zones	●	●	●	●	●	●		●	●	●	●
Steam + Sani	●	●	●	●	●	●		●	●	●	●
Delay Start	1- to 12-hour	1- to 12-hour	1- to 12-hour	1- to 12-hour	2/4/8-hour	1- to 12-hour		1- to 12-hour	1- to 12-hour	1- to 12-hour	2/4/8-hour
Wash temp—Boost	●	●	●	●	●	●		●	●	●	●
Wash temp—Sanitize**	●	●	●	●	●	●		●	●	●	●
Dry Boost™/Heated dry	●/●	●/●	●/●	●/●	●/●	●/●		●/●	●/●	●/●	●/●
Lock controls	●	●	●	●	●	●		●	●	●	●
Racking											
Third Rack	●	●				Optional		●	Optional	Optional	
Rack finish	Silver	Silver	Silver	Silver	Silver	Silver		Silver	Silver	Silver	Silver
Ball-tip tines	●	●	●	●	●	●		●	●	●	●
Upper rack	Easy-touch, adjustable full-extension	Easy-touch, adjustable full-extension	Manual + Adjustable	Manual + Adjustable		Manual + Adjustable		Manual + Adjustable	Manual + Adjustable	Manual + Adjustable	
Fold-down-tine flexibility	2 multi-position, lower	2 multi-position, lower									
Utility shelves			2 Stem Safe	2 Stem Safe		2 Stem Safe			2 Stem Safe	2 Stem Safe	
Lower rack	Multi-position fold-down-tines	Multi-position fold-down-tines	Fixed	Fixed	Fixed	Fixed		Fixed	Fixed	Fixed	Fixed
Angled tines	●	●	●	●	●	●		●	●	●	●
Silverware basket	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers		1-pc. silverware basket with 3 cell covers	1-pc silverware basket with 3 cell covers	1-pc silverware basket with 3 cell covers	1-pc silverware basket with 3 cell covers
Handle color	Stainless steel with chrome Stainless steel with chrome Stainless steel with chrome Color-matched Color-matched	Color-matched	Stainless steel with chrome Stainless steel with chrome Black Stainless with chrome Color-matched Color-matched	Color-matched	Stainless steel with chrome	Stainless steel with chrome		Stainless steel with chrome Stainless steel with chrome Stainless steel with chrome Black Stainless with chrome Color-matched Color-matched	Black Stainless with chrome Stainless steel with chrome Stainless steel with chrome Color-matched Color-matched	Stainless steel with chrome	Color-matched
Handle design	Designer style	Pocket handle	Designer style	Pocket handle	Designer style	Designer style		Designer style	Designer style	Designer style	Designer style
DRY											
Hidden vent with fan	●	●	●	●							
SOUND INSULATION PACKAGE†											
	46 DBA	46 DBA	48 DBA	48 DBA	50 DBA	48 DBA		50 DBA	50 DBA	54 DBA	59 DBA
INSTALLATION											
Built-up-floor capable	●	●	●	●	●	●		●	●	●	●
Top-/side-mount brackets	●	●	●	●	●	●		●	●	●	●
GPf3RACK compatible											
12-ft. drain hose (optional)	GPf12/WD24X10065	GPf12/WD24X10065	GPf12/WD24X10065	GPf12/WD24X10065	GPf12/WD24X10065	GPf12/WD24X10065		GPf12/WD24X10065	GPf12/WD24X10065	GPf12/WD24X10065	GPf12/WD24X10065
Side trim installation strips	included	included	included	included	Optional: Black WD08X10094	Included			Included	Optional: Black WD08X10094	Optional: Black WD08X10094
FLOOR PROTECTION											
Active Flood Protect	●	●	●	●	●	●		●	●	●	●
DIMENSIONS HxWxD (IN.)	33-3/8—34-5/8 X 23-3/4 X 24										
Approx. shipping wt. (lbs.)	112	112	112	112	112	89		82	81	77	80

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified to NSF Standard 184.  
†dBA levels based on Owens-Corning IEC-60704 lab testing

GE BUILT-IN DISHWASHER DIMENSIONS (IN INCHES)

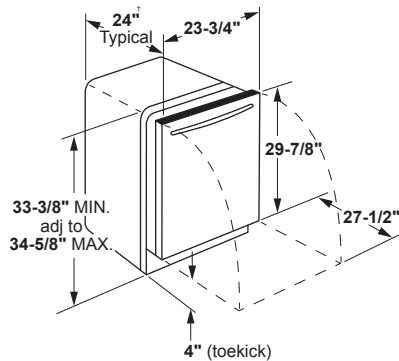

Overall depth including handle: 25.6"

GE (GDT605, GDP615, GDT635, GDT535) dishwasher electrical rating

Voltage ..... 120  
Hertz ..... 60  
Total connected load amperage ..... 6.6  
Calrod® heater watts max ..... 500/800  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

GE (GDT665, GDT645, GDT565 ) dishwasher electrical rating

Voltage ..... 120  
Hertz ..... 60  
Total connected load amperage ..... 6.6  
Calrod heater watts max ..... 500/800  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.



Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



GE STAINLESS/PLASTIC INTERIOR DISHWASHERS

	ADA COMPLIANT		GE									
	GDT225SSLSS GDT225SGLWW GDT225SGLBB	GDT226SSLSS GDT226SGLWW GDT226SGLBB	GDF450PSRSS GDF450PGRWW GDF450PGRBB (AVAIL 3/2021)	GDF510PSMSS GDF510PGMWW GDF510PGMBB GDF511PSMSS*** GDF511PGMWW*** GDF511PGMBB***	GDF510PSRSS GDF510PGRWW GDF511PSRSS*** GDF511PGRWW*** GDF511PGRBB*** (AVAIL 1/2021)	GDF535PSRSS GDF535PGRWW GDF535PGRBB (AVAIL 1/2021)		GDF530PSMSS GDF530PMMES GDF530PGMWW GDF530PGMCC GDF530PGMBB	GDF630PSMSS GDF630PMMES GDF630PGMWW GDF630PGMBB	GDF640HSMSS GDF640HMMES GDF640HGMWW GDF640HGMBB	GDF565SSNSS	GDF645SMNES GDF645SGNWW GDF645SGNBB GDF645SSNSS
ENERGY STAR® certified	●	●	●	●	●	●		●	●	●	●	●
CEE Tier 1 qualified	●	●	●	●	●	●		●	●	●	●	●
Energy Factor (EF)	0.80	0.80	0.80	0.80	0.80	0.80		0.80	0.80	0.80	0.80	0.80
Normal wash gallons per cycle*	3.5	3.5	3.5	3.5	3.5	3.5		3.5	3.5	3.5	3.5	3.5
Kilowatt hrs./yr.	270	270	270	270	270	270		270	270	270	270	270
ADA	●	●										
WiFi	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)		Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)
FEATURES												
Interior	Stainless Steel	Stainless steel	Plastic	Plastic	Plastic	Plastic		Plastic	Plastic	Stainless	Stainless steel	Stainless steel
Door liner	Stainless Steel	Stainless steel	Plastic	Plastic	Plastic	Plastic		Plastic	Plastic	Stainless	Stainless steel	Stainless steel
Tub liner	Stainless Steel	Stainless steel	Plastic	Plastic	Plastic	Plastic		Plastic	Plastic	Plastic	Stainless steel	Stainless steel
Place settings	Up to 12	Up to 12	Up to 12	Up to 14	Up to 12	Up to 14		Up to 16	Up to 16	Up to 14	Up to 14	Up to 16
Front appearance	Top control	Top control	Front control	Front control	Front control	Front control		Front control	Front control	Front control	Front control	Front Control
Wash system	3-level standard	3-level standard	400 Series	500 Series	500 Series	500 Series		600 Series	600 Series	600 Series	500 Series	600 Series
Water filtration	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter		100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter
Hard-food disposer	Piranha™	Piranha	Piranha	Piranha	Piranha	Piranha		Piranha	Piranha	Piranha	Piranha	Piranha
Wash levels	Upper/middle/lower	Upper/lower/middle	Middle/lower	Middle/lower	Middle/lower	Middle/lower		Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower
Dedicated silverware jets mid-wash arm			●	●	●	●		●	●	●	●	●
Dual pumps and motors	●	●	●	●	●	●		●	●	●	●	●
Automatic temp. control	●	●	●	●	●	●		●	●	●	●	●
Hot Start	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic		Automatic	Automatic	Automatic	Automatic	Automatic
Clean Sensor	●	●						●	●	●	●	●
Rinse Aid dispenser	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment		Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment	Rinse aid with indicator and adjustment
Clean touch controls												
Sabbath/door wake-up mode	●	●	●	●	●	●		●	●	●	●	●
End-of-cycle indicators	1 "Clean" light, 1 "Sanitized" light	"1 "Clean" light, 1 "Sanitized" light	1 "Clean" cycle progress indicator	1 "Clean" light	1 "Clean" cycle progress indicator	"Sanitized" light, cycle progress indicators		1 "Clean" light, 1 "Sanitized" light, 1 "Time Remaining" light	1 "Clean" light, 1 "Sanitized" light, 1 "Time Remaining" light	1 "Clean" light, 1 "Sanitized" light	1 "Clean" light, 1 "Sanitized" light	1 "Clean" light, 1 "Sanitized" light, 1 "Time Remaining" light
Touchpads	4	4	2	4	4	4		6	8	8	6	8
Cycles/Options	3	3	3	4	4	4		4	4	4	5/7	5/11
3-digit countdown display	●	●						●	●	●		●
Last cycle memory	●	●	●	●	●	●		●	●	●	●	●
Audible end-of-cycle signal	●	●						●	●	●	●	●
Cycles	Auto Sense/ Heavy/Light	Auto Sense/ Heavy/Light	1-Hour Wash/ Heavy/Normal	1-Hour Wash/Heavy/ Normal/Rinse	1-Hour Wash/Heavy/ Normal/Rinse	1-Hour Wash/Heavy/ Normal/Rinse		1-Hour Wash/Auto Sense/Heavy/Normal	1-Hour Wash/Auto Sense/Heavy/Normal	1-Hour Wash/Auto Sense/Heavy/Normal	1-Hour Wash/Auto Sense/Heavy/Normal	1-Hour Wash/Heavy Wash/Light Wash/ Normal Wash/Auto Sense
Options									4	4		4
Bottle Jets									●	●		●
Wash Zones									●	●		●
Steam + Sani							●	●	●	●		●
Delay Start	1- to 12-hour	1- to 12-hour						1- to 12-hour	1- to 12-hour	1- to 12-hour	2/4/8-hour	1- to 12-hour
Wash temp—Boost	●	●		●	●	●		●	●	●	●	●
Wash temp—Sanitize**	●	●						●	●	●	●	●
Dry Boost™/Heated Dry			●/●	●/●	●/●	●/●		●/●	●/●	●/●	●/●	●/●
Lock controls	●	●	●	●	●	●		●	●	●	●	●
Racking												
Third Rack								Optional	●	●		●
Rack finish	Gray	Gray	Silver	Silver	Silver	Silver		Silver	Silver	Silver	Silver	Silver
Ball-tip tines	●	●		●	●	●		●	●	●	●	●
Upper rack	Manual + Adjustable	Manual + Adjustable	Standard	Standard	Standard	Standard		Manual + Adjustable	Manual + Adjustable	Manual + Adjustable		Manual + Adjustable
Utility shelves	1 cup shelf	1 cup shelf						2 Stem Safe				2 Stem Safe
Lower rack		●	Fixed	Fixed	Fixed	Fixed		Fixed	Fixed	Fixed	Fixed	Fixed
Angled tines	●	●	●	●	●	●		●	●	●	●	●
Silverware basket	1-pc. silverware basket with 2 cell covers	1-pc. silverware basket with 2 cell covers	1-pc. silverware basket	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket	1-pc. silverware basket		1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers
Handle color	Color-matched	Stainless steel with chrome Color-matched Color-matched Designer style	Color-matched	Color-matched	Color-matched	Color-matched		Color-matched	Color-matched	Color-matched	Color-matched	Color-matched
Handle design	Pocket		Integrated	Recessed	Integrated	Integrated		Recessed	Recessed	Recessed	Recessed	Recessed
DRY												
Calrod® heating element			800/500	800/500	800/500	800/500		800/500	800/500	800/500	800/500	800/500
SOUND INSULATION PACKAGE††	51 dBA	51 dBA	60 dBA	59 dBA	59 dBA	55 dBA		54 dBA	50 dBA	50 dBA	50 dBA	48 dBA
Tub insulation—blanket	●	●	●	●	●	●		●	●	●	●	●
INSTALLATION	Cabinet-depth installation	Cabinet-depth installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation		Flush cabinet installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation
Built-up-floor capable	●	●	●	●	●	●		●	●	●	●	●
Top-/side-mount brackets	●	●	●	●	●	●		●	●	●	●	●
GPF3RACK compatible								●				●
12-ft. drain hose (optional)	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065		GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065
Side trim installation strips	Factory installed	Factory installed						Optional: White WD08X10096 Optional: Black WD08X10094	Included	Included	Optional: Black WD08X10094	Included
FLOOR PROTECTION												
Active Flood Protect			●	●	●	●		●	●	●	●	●
DIMENSIONS HxWxD (in.)	← 32-1/4 — 34-5/8 x 23-3/4 x 23-1/2 →		← 33-3/8 — 34-5/8 x 23-3/4 x 24 →					← 33-3/8 — 34-5/8 x 23-3/4 x 24 →				
Approx. shipping weight (lbs.)	96	96	65	74	65	65		82	77	81	112	112

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified to NSF Standard 184.  
\*\*\*GDF511 models have power cords attached  
†dBA levels based on Owens-Corning IEC-60704 lab testing

GE STAINLESS/PLASTIC INTERIOR DISHWASHERS

GE (GDF630, GDF530, GDF450, GDF535 GDF510) dishwasher electrical rating

Voltage .....120  
Hertz ..... 60  
Total connected load amperage ..... 7.1  
Calrod heater watts max.....500/800  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.


GE (GDF565, GDF645) dishwasher electrical rating

Voltage .....120  
Hertz ..... 60  
Total connected load amperage .....7.2  
Calrod heater watts max.....500/800  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

ADA-compliant models (GDT225SGL/ GDT225SSL) electrical rating

Voltage AC .....120  
Hertz ..... 60  
Total connected load amperage .....6.7  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

UFAS/ADA-COMPLIANT

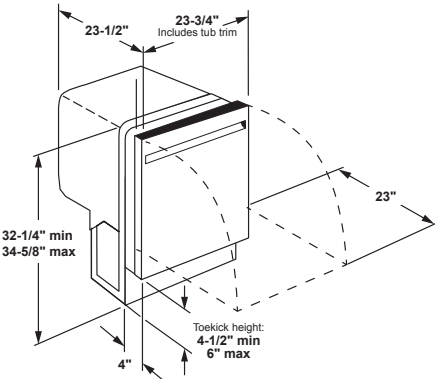

Overall depth including handle: 25.6".



National Sanitation Foundation

Listed by Underwriters Laboratories








FRONT LOAD WASHERS


	GE			
	GFW850SPN GFW850SSN	GFW650SPN GFW650SSN	GFW550SPN GFW550SSN	CONTRACT EXCLUSIVE GFW510SCN
CAPACITY				
Cubic feet	5.0 DOE*	4.8 DOE*	4.8 DOE*	4.5 DOE*
FEATURES				
ENERGY STAR® certified	●	●	●	●
UFAS/ADA**	●/●	●/●	●/●	●/●
UltraFresh Vent System	●	●	●	●
Wash/rinse temperatures	5	5	5	5
Water levels	Automatic	Automatic	Automatic	Automatic
Reversible door	●	●	●	●
Vibration control	dBT	dBT	dBT	dBT
Internal water heater	●	●		
Custom cycle (My Cycle)			●	●
Steam Assist	●	●		
Cold Wash Technology	●	●	●	●
Number of cycles	12	12	10	10
Sanitize with Allergen	●	●		
Sanitize			using Oxi	using Oxi
Bulky/Bedding	●	●	●	●
Active Wear	●	●		
Time Saver	●	●	●	
1 Step Wash + Dry	●			
Tumble Care		●	●	●
Delay Wash	●	●	●	●
SmartDispense™	●	●		
Detergent dispenser (liquid/powder)	Flow-thru timed	Flow-thru timed	Flow-thru timed	Flow-thru timed
Bleach dispenser	Flow-thru timed	Flow-thru timed	Flow-thru timed	Flow-thru timed
Fabric softener dispenser	Flow-thru timed	Flow-thru timed	Flow-thru timed	Flow-thru timed
Pretreat dispenser	SmartDispense™	SmartDispense	●	
Control type	Electronic LED	Electronic LED	Electronic LED	Electronic LED
End-of-cycle signal	Adjustable	Adjustable	Adjustable	Adjustable
Wash/spin speed combinations	5	5	5	5
Max. RPM spin speed	1,300	1,300	1,300	1,300
Water temperature system	Auto Temp Control	Auto Temp Control	Auto Temp Control	Auto Temp Control
Colors/Normal	●	●	●	●
Delicates/Hand Wash	●	●	●	●
Whites	●	●	●	●
Optional soil levels	5	5	5	5
Self Clean/Tub Clean	●	●	●	●
Extra Rinse	●	●	●	●
Add a Garment	●	●	●	●
Quick Wash	●	●	●	●
Adaptive capabilities	Load size	Load size	Load size	Load size
Washer interior light	LED	LED		
Cycle countdown	●	●	●	●
Cycle status lights	●	●	●	●
Prewash/Presoak	Prewash	Prewash	Prewash	Presoak
Stainless steel wash basket	●	●	●	●
Handle	Outside pocket	Outside pocket	Outside pocket	Outside pocket
Inlet hoses				Included
Optional pedestal	GFP1528	GFP1528	GFP1528	GFP1528
Optional stacking kit	GFA28KITN	GFA28KITN	GFA28KITN	GFA28KITN
WiFi Connect	●	●	●	●
APPEARANCE				
Colors available***	WW DG, RS	WW SN	WW DG	WW
WEIGHTS & DIMENSIONS				
Approx. shipping weight (lbs.)	263	256	256	256
	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side
Flexible installation				
POWER/RATINGS				
Integrated Modified Energy Factor (IMEF)	2.76	2.76	2.76	2.76
Integrated Water Factor (IWF)	3.00	3.00	3.00	3.00
Circuit breaker or Time-delay fuse	15 or 20 amps	15 or 20 amps	15 or 20 amps	15 or 20 amps
Volts/Hertz	120V; 60Hz	120V; 60Hz	120V; 60Hz	120V; 60Hz

\*Department of Energy.  
\*\*ADA-qualified based on Americans with Disabilities Act. UFAS compliant with the Uniform Federal Accessibility Standards.  
\*\*\*WW = White, DG = Diamond Gray, RS = Sapphire Blue, SN = Satin Nickel.

WASHER DIMENSIONS: GFW850

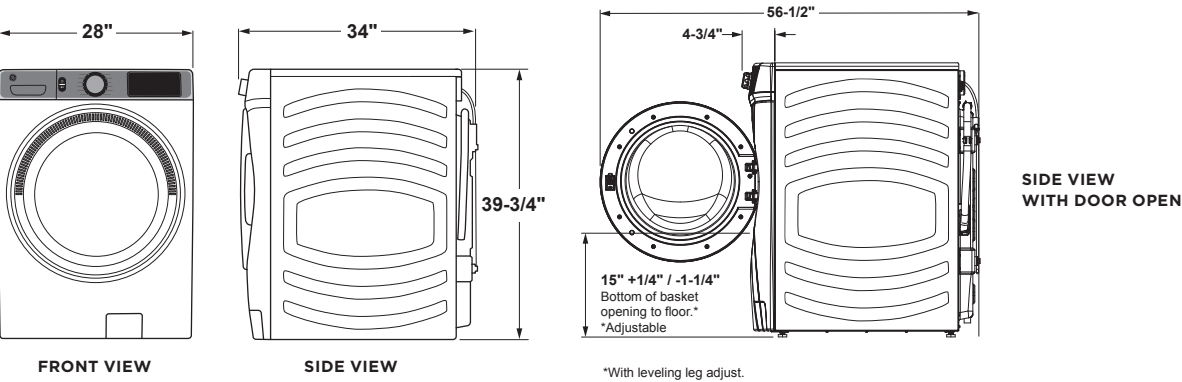

WASHER DIMENSIONS: GFW650, GFW550, GFW510

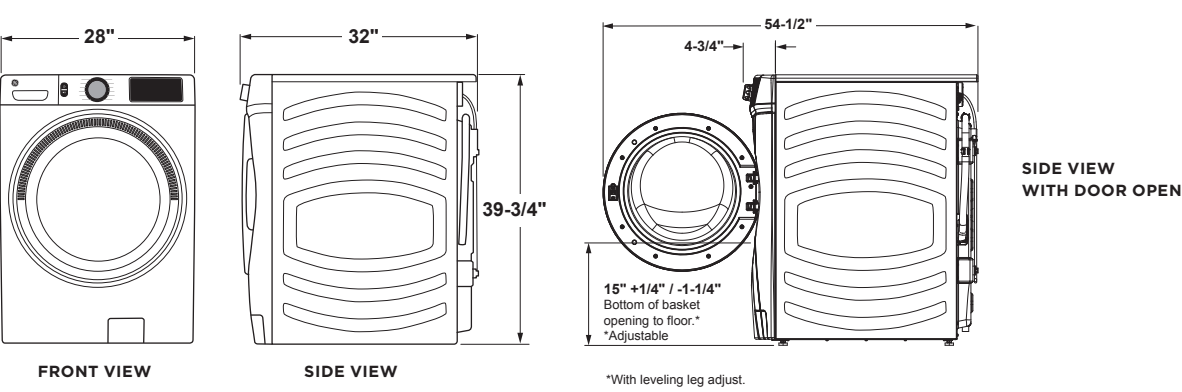


GE FRONT LOAD WASHER/DRYER PEDESTALS

PEDESTAL DIMENSIONS

For 28" width front load washers and dryers.

GFP1528SNWW-White  
GFP1528PNDG-Diamond Gray  
GFP1528PNSN-Satin Nickel  
GFP1528PNRS-Sapphire Blue


This optional 16" pedestal raises the door opening and height of the washer or dryer.

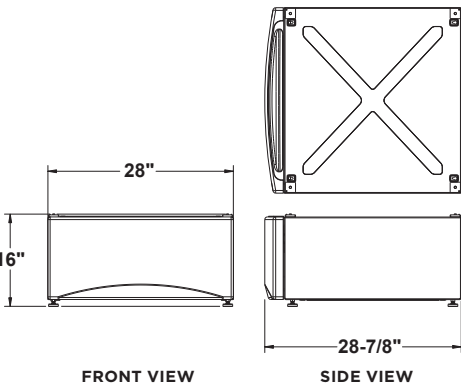

GE FRONT LOAD WASHERS/DRYERS (STACKED)

STACKED DIMENSIONS (IN INCHES)

GFW850/GFD85, GFW650/GFD65, GFW550/GFD55, GFW510/GFD55/GFV55

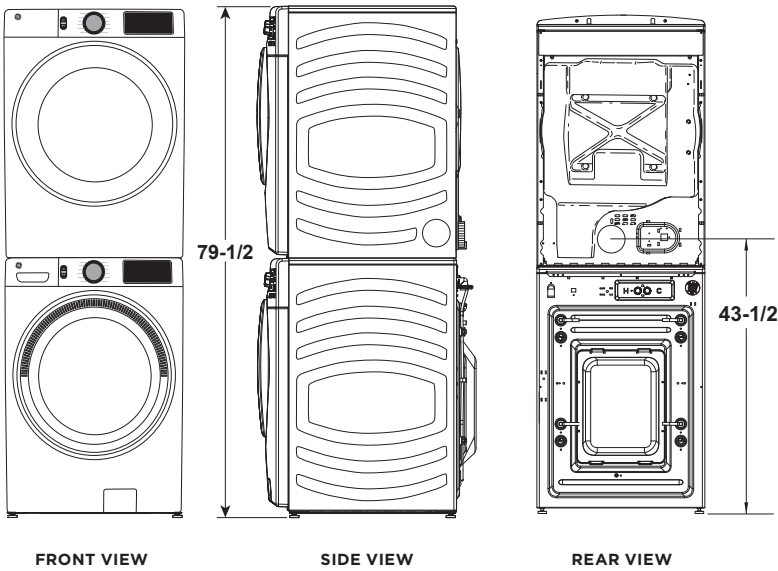




FRONT LOAD DRYERS

	GE		
	GFD85ESPN/GSPN GFD85ESSN/GSSN	GFD65ESPN/GSPN GFD65ESSN/GSSN	GFD55ESPN/GSPN GFD55ESSN/GSSN GFV55ESSN
CAPACITY			
Cubic feet	7.8	7.8	7.8
FEATURES			
ENERGY STAR® certified	●	●	●
UFAS/ADA*	●/●	●/●	●/●
Moisture sensor	Sensor Dry	Sensor Dry	Sensor Dry
Control type	Electronic LED	Electronic LED	Electronic LED
Vent Sensing	●	●	●
Cycle countdown	with LED indicators	with LED indicators	with LED indicators
Cycle status lights	●	●	●
Dual thermistors	●	●	●
Heat selections	5	5	5
Steam Refresh	●	●	
Steam Dewrinkle	●	●	
eDry™ option	●	●	●
Delay Dry	●	●	●
Quick Dry	●	●	●
Number of cycles	12	12	10
Bulky/Bedding	●	●	●
Cotton cycle	●	●	●
Custom cycle (My Cycle)			●
Delicate cycle	●	●	●
Normal/mixed loads cycle	●	●	●
Optional dryness levels—Damp	●	●	●
Optional dryness levels—Dry	●	●	●
Optional dryness levels—Less dry	●	●	●
Optional dryness levels—More dry	●	●	●
Optional dryness levels—Extra dry	●	●	●
Timed dry—actual mins on timer	90	90	90
Add Time	●	●	●
Reduce Static	●	●	
WiFi Connect	●	●	●
Washer Link	●		
Damp Dry signal/Damp Alert	●	●	●
Dryer interior light	LED	LED	LED
90-ft. extended venting capability	●	●	90-ft. (GFD)/ 200-ft. (GFV)
End-of-cycle signal	Adjustable	Adjustable	Adjustable
Front serviceable	●	●	●
Door style	See-thru glass	See-thru glass	See-thru glass
Drum interior	Stainless steel	Stainless steel	Stainless steel
Leveling legs	●	●	●
Reverse-a-Door	●	●	●
Exhaust options (electric/gas)	4/4	4/4	4/4
Handle	Outside pocket	Outside pocket	Outside pocket
Dryer rack option	WE01X22274	WE01X22274	WE01X22274
Optional pedestal	GFP1528	GFP1528	GFP1528
APPEARANCE			
Colors available**	WW DG, RS	WW SN	WW DG
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.) E/G	153/159	153/159	153/159
Flexible installation	Undercounter, stacked, side-by-side, built-in	Undercounter, stacked, side-by-side, built-in	Undercounter, stacked, side-by-side
LP conversion kit (sold separately)	WE25X10032	WE25X10032	WE25X10032

\*ADA-qualified based on Americans with Disabilities Act. UFAS compliant with the Uniform Federal Accessibility Standards.  
\*\*WW = White, DG = Diamond Gray, RS = Sapphire Blue, SN = Satin Nickel.

DRYER DIMENSIONS (IN INCHES)  
GFD85E, GFD85G, GFD65E, GFD65G, GFD55E, GFD55G, GFV55

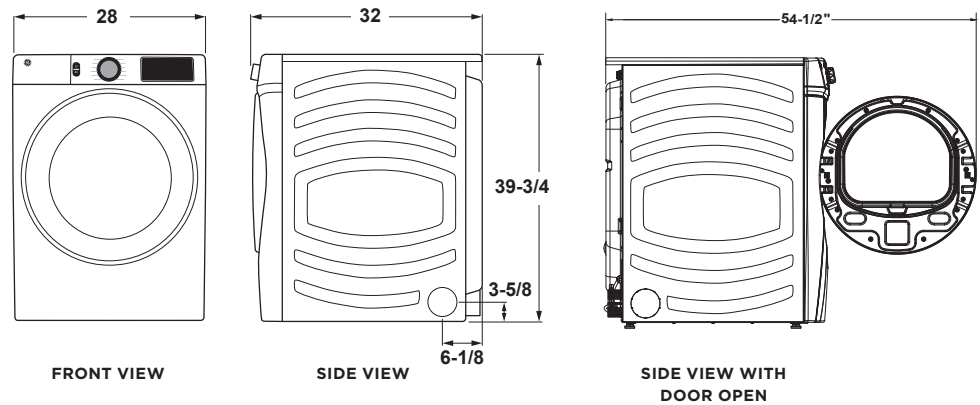

DRYER SPECIFICATIONS

**EXHAUST OPTIONS**  
**Electric/Gas:**  
For 7.8 cu. ft. there is 4-way venting (GFD85, GFD65, GFD55 GFV55)  
**CIRCUIT REQUIREMENTS**  
**Electric:**  
An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

**Electric dryer rating:**  
120V/208V, 4,300W, 23A, 60Hz ~ 7.8 cu. ft. dryers; 120V/240V, 5,600W, 25A, 60Hz ~ 7.8 cu. ft. dryers  
**Gas:**  
An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.  
**NEMA receptacle codes:**  
3-prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle; 4-prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle.

**Gas dryer electric rating:**  
120V, 60Hz, 8A  
**Gas (BTU/HR):**  
20,000 for 7.8 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 7.8 cu. ft. model kits are WE25M87. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.  
**Dryer note:**  
Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.


**WASHER SPECIFICATIONS**  
Circuit requirements: An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.  
**Electrical requirements:** 120V, 60 Hertz, 12.0 Amps  
**See pub. no. 31-2819 for installation information.**

FRONT LOAD COMBINATION  
WASHER/DRYER

	GE
	GFQ14ESSNWW
CAPACITY	
Cubic feet	2.4
FEATURES	
Wash/rinse temperatures	5
Water levels	Load sensing—Adaptive fill
Internal water heater	●
Number of cycles	16
Specialty cycles	4
Basket Clean	●
Detergent dispenser (liquid/powder)	●
Bleach dispenser	●
Fabric softener dispenser	●
Control type	Electronic/ Electronic touch/ LED
End-of-cycle signal	●
Wash/spin speed combinations	5
RPM spin speed	1,450
(ATC) Auto Temp Control	●
Casuals	●
Sanitize	●
Cold wash	●
Optional soil levels	5
Extra rinse	●
Adaptive capabilities	●
Cycle countdown	●
Cycle status lights	●
Delay start	●
Drain & Spin	●
Rinse & Spin	Spin-only cycle
Speed Wash	●
Door style	Round
Noise package	Deluxe Quiet
Leveling legs	●
Stainless steel wash basket	●
Inlet hoses	●
Optional stacking kit	GFA24KITL
Drive system	Direct drive
APPEARANCE	
Colors available*	WW
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	203 lb.
POWER/RATINGS	
Integrated Modified Energy Factor (IMEF)	1.84

\*WW = White

DIMENSIONS: GFQ14ESSNWW

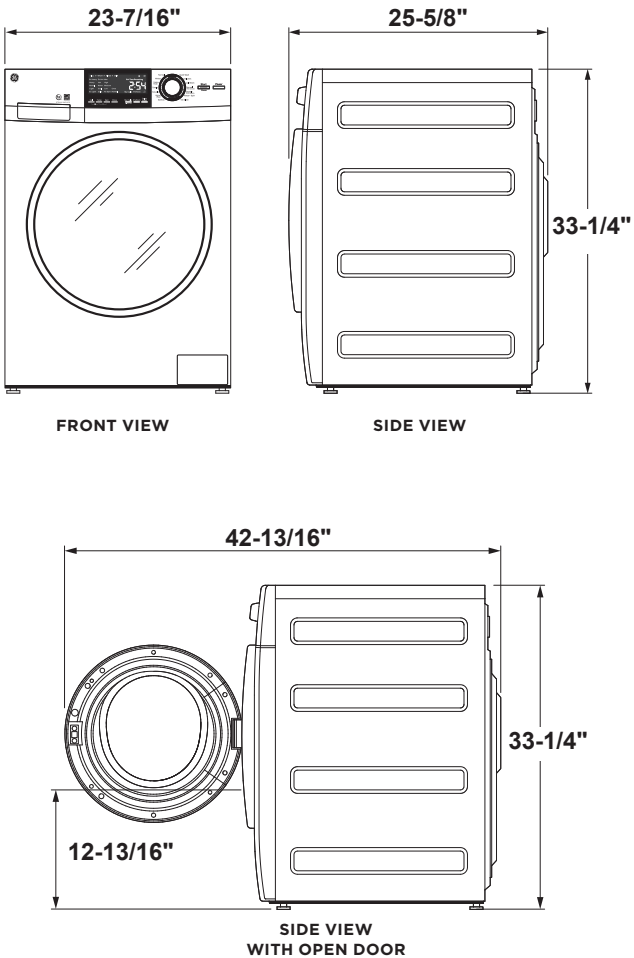


FRONT LOAD WASHER

	GE
	PAIR WITH CONDENSER DRYER GFW148SSM
CAPACITY	
Cubic feet	2.4 DOE*
FEATURES	
ENERGY STAR® certified	●
WiFi Connect	Optional (Requires part no. PBX23W00Y0)
Wash/rinse temperatures	5
Water levels	Automatic
Internal water heater	●
Number of cycles	14
Specialty cycles	Active Wear
Basket Clean	●
Detergent dispenser (liquid/powder)	Flow-thru timed
Bleach dispenser	
Fabric softener dispenser	Flow-thru timed
Control type	Electronic
End-of-cycle signal	●
Wash/spin speed combinations	5
RPM spin speed	1,400
(ATC) Auto Temp Control	●
Steam	●
Prewash	●
Colors/Normal	●
Delicates	●
Whites	●
Heavy duty	●
Towels	●
Casuals	●
Sanitize	●
Cold wash	●
Optional soil levels	●
2nd rinse	●
Adaptive capabilities	Load size
Cycle countdown	with LED indicators
Cycle status lights	
Delay start	●
Drain & Spin	●
Rinse & Spin	●
Speed Wash	●
Door style	See-thru glass
Noise package	Deluxe Quiet
Leveling legs	●
Stainless steel wash basket	●
Inlet hoses	Included
Optional stacking kit	GFA24KITL
Drive system	Direct
APPEARANCE	
Colors available**	WW
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	170
Flexible installation	Undercounter, stacked, side-by-side
POWER/RATINGS	
Integrated Modified Energy Factor (IMEF)	2.2
Integrated Water Factor (IWF)	3.5

\*Department of Energy.  
\*\*WW = White.

WASHER DIMENSIONS: GFW148SSL, GFW148SSM

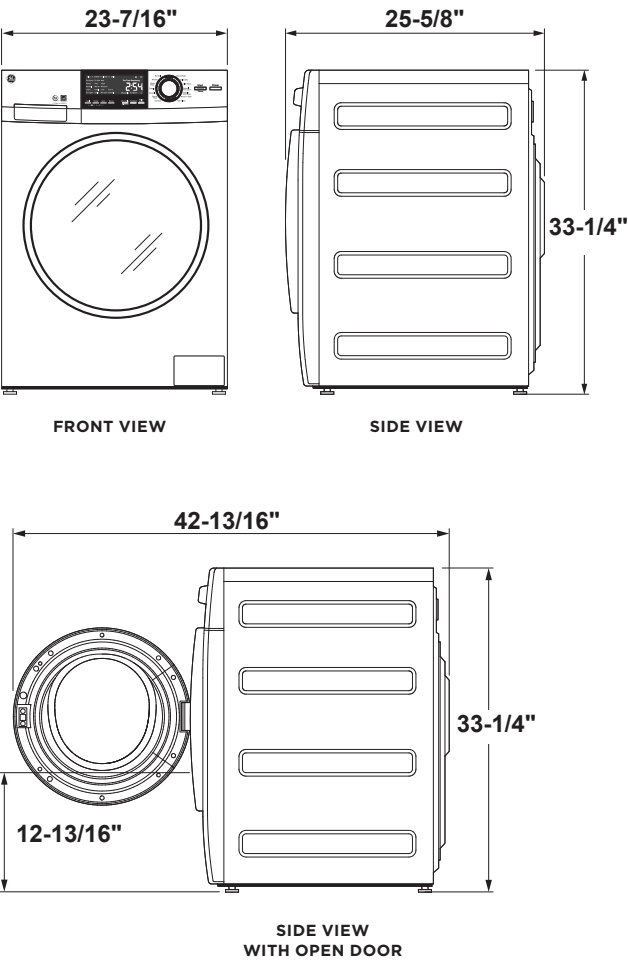


FRONT LOAD DRYER


	GE	
	CONDENSER DRYER GFT14ESSM	VENTED GFD14ESSN
CAPACITY		
Cubic feet	4.1	4.3
FEATURES		
ENERGY STAR certified	●	●
WiFi Connect	Optional (Requires part no. PBX23W00Y0)	Optional (Requires part no. PBX23W00Y0)
Moisture sensor	Sensor Dry	Sensor Dry
Control type	Electronic LED with LED indicators	Electronic LED with LED indicators
Cycle countdown	●	●
Cycle status lights	●	●
Heat selections	4	4
Number of cycles	13	13
Specialty cycles	Active Wear	Active Wear
Cotton cycle	●	●
Delicate cycle	●	●
Wrinkle Free/Casuals	●	●
Mixed loads cycle	●	●
Antibacterial cycle	●	●
Speed Dry	●	●
Timed dry	●	●
Air Fluff	●	●
Towels	●	●
Warm up	●	●
Rack Dry	●	●
Extended tumble	●	●
Dewrinkle	●	●
Damp Dry signal	●	●
Dryer interior light	LED	●
Clean lint filter reminder	●	●
Delay start	24 hours	24 hours
End-of-cycle signal	●	●
Door style	See-thru glass	See-thru glass
Noise package	Quiet-by-Design	Quiet-by-Design
Drum interior	Stainless steel	Stainless steel
Leveling legs	●	●
Reverse-a-Door	●	●
Exhaust options (electric)	Ventless tank or direct drain	Rear, left, right, bottom
Optional stacking kit	GFA24KITL	GFA24KITL
APPEARANCE		
Colors available*	WW	WW
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	110	103
Flexible installation	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side
POWER/RATINGS		
Volts/Hertz/Wattage	208/240V/60Hz/2,800W	208/240V/60Hz/2,800W

\*WW = White

CONDENSER DRYER DIMENSIONS: GFT14ESSM

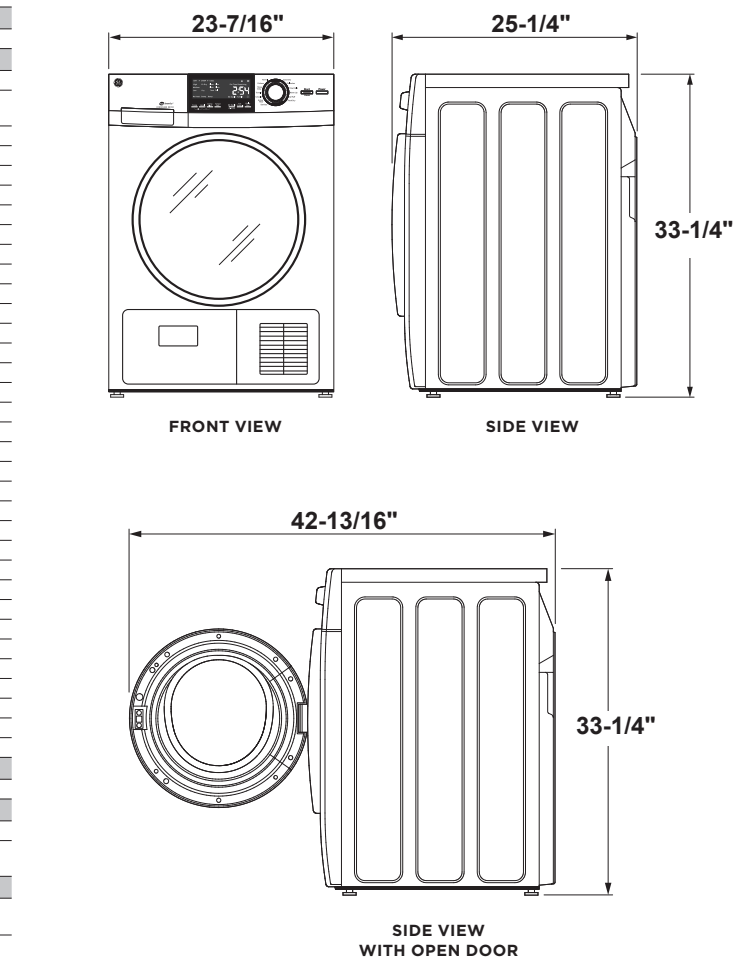

STACKED DIMENSIONS GFW148SSM, GFT14ESSM

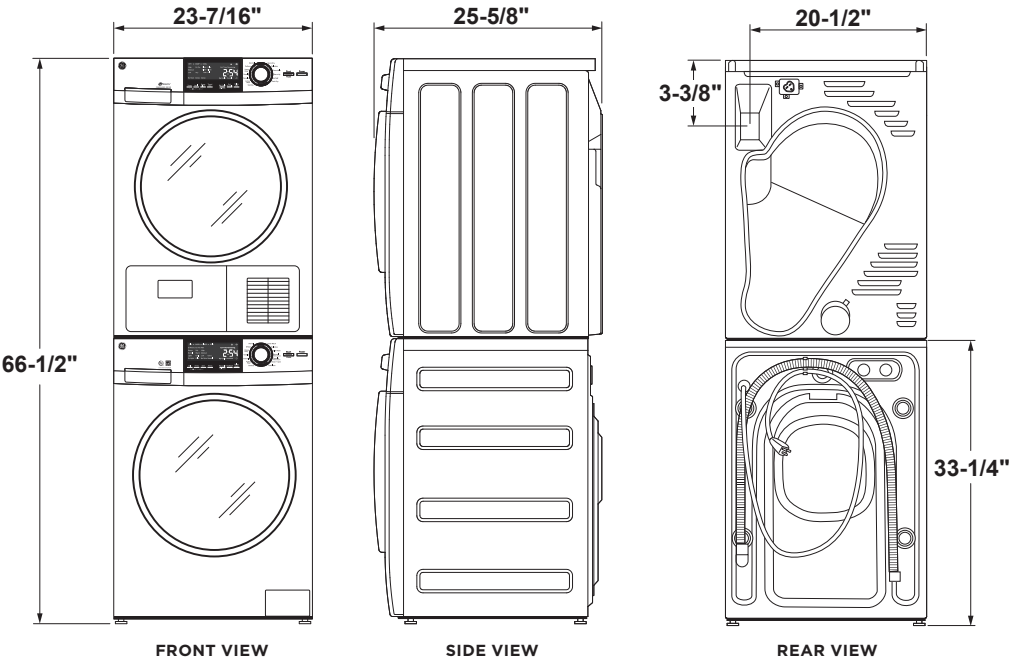




TOP LOAD WASHERS

	GE									
	GTW845CPN GTW845CSN	GTW840CPN GTW840CSN	GTW725BPN GTW725BSN	GTW720BPN GTW720BSN	GTW500ASN	CONTRACT EXCLUSIVE GTW490ACJ	GTW465ASN	GTW335ASN	CONTRACT EXCLUSIVE GTW220ACK	
CAPACITY										
Capacity cu. ft.	5.0 DOE*	5.2 DOE*	4.6 DOE*	4.8 DOE*	4.6 DOE*	4.4 DOE*	4.5 DOE*	4.2 DOE*	3.8 DOE*	
Energy										
ENERGY STAR® certified	●	●	●	●	●	●				
CONTROLS										
Electronic	●	●	●	●	●	●	●	●	●	
Status indicators	LED	LED	LED	LED	LED	LED	LED	LED	LED	
Cycle countdown	●	●	●	●						
WASH SYSTEM										
Wash/rinse temps	6	6	6	6	6	6	6	6	6	
Water levels	Precise Fill	Precise Fill	Precise Fill	Precise Fill	Precise Fill	Precise Fill	4 + Precise Fill	4 + Precise Fill	4 + Precise Fill	
Wash basket	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	
Infusor/Agitator	Dual-action	Infusor	Dual-action	Infusor	Infusor	Infusor	Dual-action	Heavy-duty	Heavy-duty	
Maximum spin speed	800 RPM	800 RPM	800 RPM	800 RPM	800 RPM	800 RPM	750 RPM	750 RPM	750 RPM	
Deep Fill	●	●	●	●	●	●	●			
DISPENSERS										
Bleach	●	●	●	●	●	●	●	●	●	
Fabric softener/ conditioner, Deep Rinse	●	●	●	●	Deep Rinse	Deep Rinse	●	Deep Rinse	Deep Rinse	
WASH CYCLES										
Number of cycles	10 + Water Station	10 + Water Station	12	12	13	13	14	11	10	
Whites	●	●	●	●	●	●	●	●	●	
Colors	●	●	●	●	●	●	●	●	●	
Casuals/Easy Care			●	●	●	●	●	●	●	
Deep Clean/Heavy Duty	with Power Prewash	with Power Prewash	●	●	●	●	●			
Delicates	●	●	●	●	●	●	●	●	●	
Jeans	●	●	●	●	●	●	●			
Towels/Sheets	●	●	●	●	●	●				
Bulky Items	●	●	●	●	●	●	●	●	●	
Quick/Speed	●	●	●	●	●	●	●			
Active Wear	●	●	●	●	●	●	●	●	●	
Sanitize with Oxi	●	●	●	●						
Cold Wash					●	●				
SOILS										
Extra heavy	●	●	●	●	●	●	●			
Heavy	●	●	●	●	●	●	●	●	●	
Normal	●	●	●	●	●	●	●	●	●	
Light	●	●	●	●	●	●	●	●	●	
Extra light					●	●	●			
TEMPERATURES										
Hot	●	●	●	●	●	●	●	●	●	
Warm	●	●	●	●	●	●	●	●	●	
Colors	●	●	●	●	●	●	●	●	●	
Cool	●	●	●	●	●	●	●	●	●	
Cold	●	●	●	●	●	●	●	●	●	
Tap Cold	●	●	●	●	●	●	●	●	●	
SPECIAL CYCLES										
Water Station	●	●								
Stain Removal Guide			●	●	●	●				
Drain & Spin	●	●	●	●	●	●	●	●	●	
Basket Clean					●	●	●			
Power Prewash	●	●			●		●	●		
ADDITIONAL										
SmartDispense™	●	●								
FlexDispense™										
			Optional (Requires part no. PBX23W00Y0)	Optional (Requires part no. PBX23W00Y0)						
WiFi Connect	●	●								
Warm Rinse	●	●	●	●						
Pre Soak/Auto Soak	●	●	●	●	●	●	●			
Stain Pretreat						●				
Deep Rinse	●	●	●	●	●	●	●	●	●	
Extra Rinse	●	●	●	●	●	●	●			
Delay Wash	●	●	●	●						
My Cycle settings	●	●	●	●						
Inlet hoses						Included			Included	
Lid	Soft-close clear glass	Soft-close clear glass	Soft-close clear glass	Soft-close clear glass						
Vibration Control	Advanced	Advanced	Advanced	Advanced	●	●	●	●	●	
Drive system	Direct	Direct	Direct	Direct	Belt	Belt	Belt	Belt	Belt	
Appearance										
Backsplash color	White + Silver DG	White + Silver DG	White + Silver DG	White + Silver DG	Silver	White, White + Silver	White	White	White	
Colors available***	WS DG	WS DG	WS DG	WS DG	WS	WW, WS	WW	WW	WW	
Weights & Dimensions										
Approx. ship. weight (lbs.)	170	170	155	155	155	155	155	155	145	
Ratings										
Integrated Modified Energy Factor (IMEF)	2.06	2.06	2.06	2.06	2.06	2.07	1.35	1.30	1.30	
Integrated Water Factor (IWF)	4.3	4.3	4.3	4.3	4.3	4.1	7.0	8.2	8.2	

\*Department of Energy.  
\*\*In accordance with CEE High Efficiency specifications for residential clothes washers (effective 3/7/2015).  
\*\*\*WW = White, WS = White with Silver backsplash, DG = Diamond Gray.


WASHER DIMENSIONS FOR 5.2/5.0 CU. FT. CAPACITY

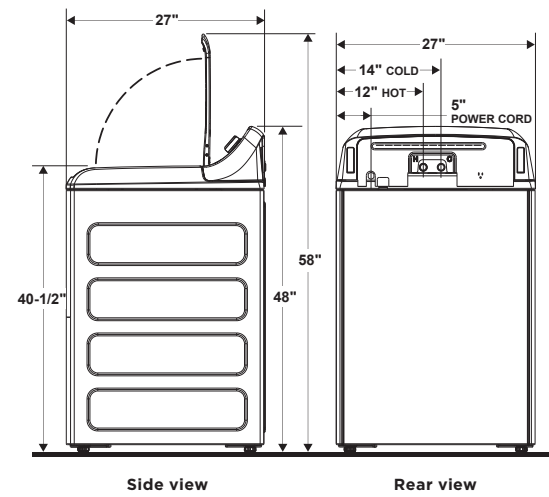


WASHER SPECIFICATIONS

**Circuit requirements:** An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.  
**Electrical rating:** 115V, 60Hz, 10A  
**Washer note:** Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

WASHER DIMENSIONS FOR 4.8/4.6 CU. FT. CAPACITY WITH GLASS LID

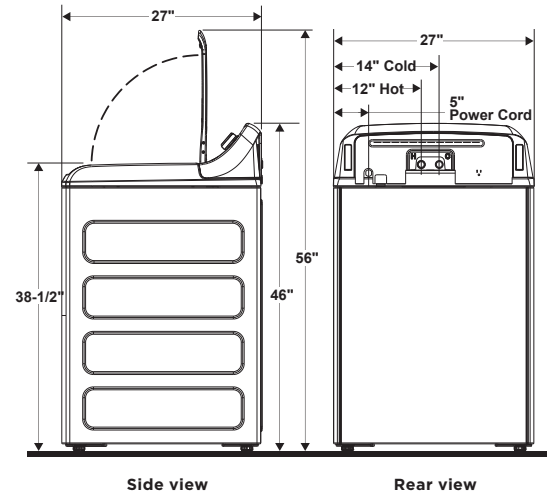

WASHER DIMENSIONS FOR 4.6, 4.5, 4.4, 4.2, 3.8 CU. FT. CAPACITY WITH METAL LID

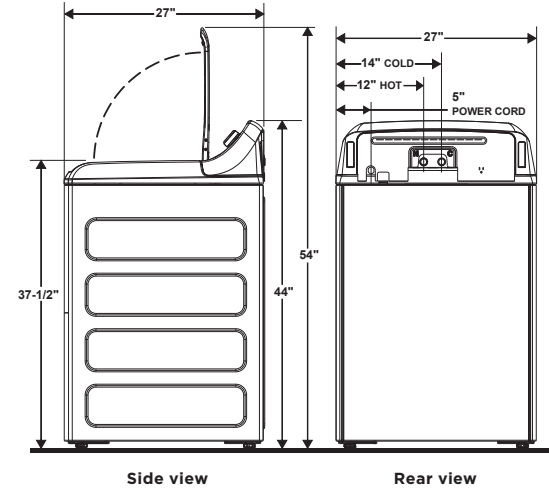

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


TOP LOAD MATCHING DRYERS

	GE					
	GTD84ECSN/GCSN GTD84ECPN/GCPN	GTD72EBSN/GBSN GTD72EBPN/GBPN	GTD45EASJ/GASJ	GTD42EASJ/GASJ GTX42EASJ/GASJ	GTD33EASK/GASK GTX33EASK/GASK	CONTRACT EXCLUSIVE GTX22EASK/GASK
CAPACITY						
Capacity cu. ft.	7.4	7.4	7.2	7.2/6.2	7.2/6.2	6.2
CONTROLS						
Electronic	●	●				
Electromechanical			●	●	●	●
Heat selections	4	4	4	4	3	3
DRY SYSTEM						
Clothing moisture sensor	Sensor Dry	Sensor Dry	Sensor Dry	Auto Dry	Auto Dry	Auto Dry
Temperature sensor	Dual thermistors	Dual thermistors	Thermostat	Thermostat	Thermostat	Thermostat
Dryer drum	Aluminized alloy	Aluminized alloy	Aluminized alloy	Aluminized alloy	Aluminized alloy	Aluminized alloy
SIGNALS						
End-of-cycle	Variable	Variable	Variable	Variable	Fixed	
DRY CYCLES						
Number of cycles	11 + Steam	12	4	4	3	3
Mixed loads	●	●				
Cottons	●	●	●	●	●	●
Perm Press/Casuals	●	●	●	●	●	●
Quick/Speed Dry	●	●				
Delicates	●	●	●	●		
SPECIAL CYCLES						
Steam	●					
Dewrinkle/Warm up		●	●	●		
Towels/Sheets	●	●				
Jeans	●	●				
Air Fluff (no heat)		●	●	●	●	●
Wrinkle Care/Extended Tumble	●	●	●	●		
Bulky Items						
eDry modifier	●	●				
Sanitize	●	●				
ADDITIONAL FEATURES						
ENERGY STAR® certified	●	●				
Blocked Vent Sensor	●					
		Optional (Requires part no. PBX23W00Y0)				
WiFi Connect	●					
Glass door	●	●				
Dryer interior light	LED	LED	●	●		
Extended venting capability	120 ft.	120 ft.	120 ft.	120 ft.	120 ft.	120 ft.
Reverse-a-Door	●	●	●	●	●	●
Delay Dry	●	●				
Damp Alert	●	●				
Lint filter reminder light	●	●				
Dryer rack	WE1M396	WE1M396	WE1M396	WE1M396	WE1M396	WE1M396
My Cycle settings	●	●				
Time control	90 min.	90 min.	80 min.	80 min.	80 min.	80 min.
APPEARANCE						
Backsplash color	White + Silver DG	White + Silver DG	Silver	White	White	White
Colors available*	WS DG	WS DG	WS	WW	WW	WW
WEIGHTS & DIMENSIONS						
Approx. shipping wt.–electric (lbs.)	125	121	115	115 (GTD) 108 (GTX)	118 (GTD) 112 (GTX)	102
Approx. shipping wt.–gas (lbs.)	137	133	117	117 (GTD) 111 (GTX)	121 (GTD) 115 (GTX)	105
LP conversion kit (sold separately)	WE25X0217	WE25X0217	WE25X0217	WE25X0217	WE25X0217	WE25X0217


\*WW = White, WS = White with silver backsplash, DG = Diamond Gray.

TOP LOAD MATCHING DRYERS


DRYER DIMENSIONS FOR 6.2 CU. FT. CAPACITY

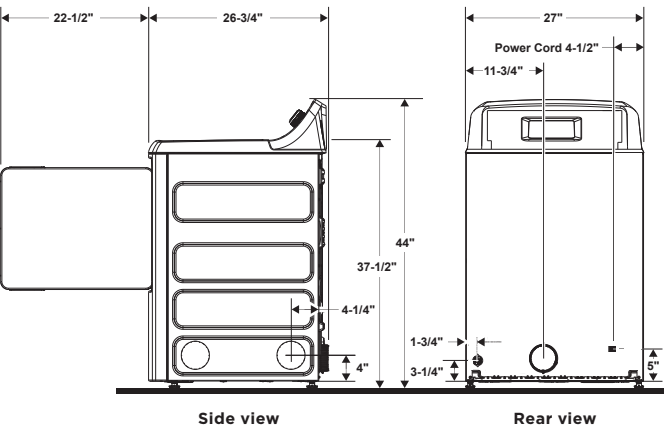


DRYER DIMENSIONS FOR GTD84

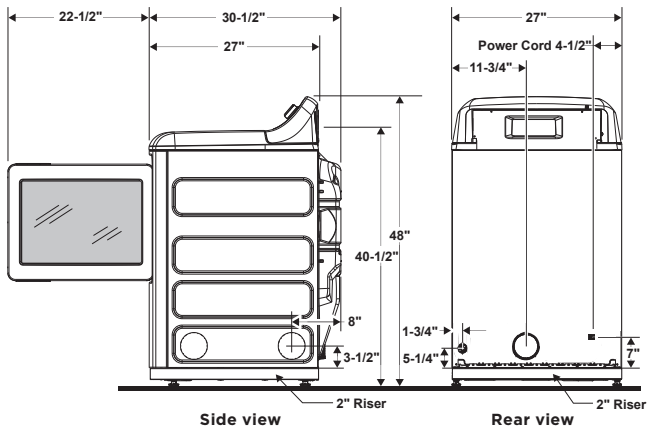

DRYER DIMENSIONS FOR 7.2 CU. FT. CAPACITY

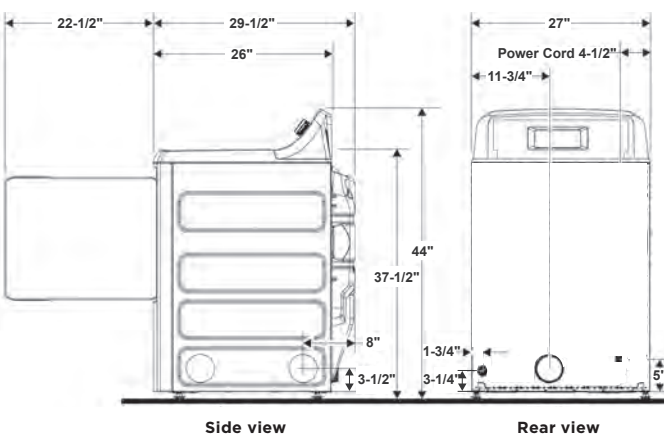

DRYER DIMENSIONS FOR GTD72

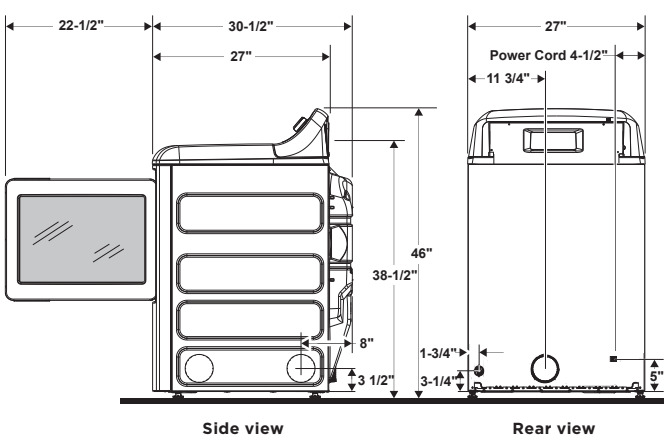

DRYER SPECIFICATIONS

EXHAUST OPTIONS:

**Electric:** 4-way via rear, right, left and bottom.

**Gas:** For 6.2, 7.2, 7.4 and 7.8 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit requirements:


**Electric:** An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

Electric dryer rating:

240V, 5,600W, 24A, 60Hz — 6.2, 7.2 and 7.4 cu. ft. dryers  
208V, 4,400W, 22A, 60Hz — 6.2, 7.2 and 7.4 cu. ft. dryers  
240V, 5,000W, 25A, 60 Hz — 7.8 cu. ft. dryers  
208V, 4,784W, 23A, 60 Hz — 7.8 cu. ft. dryers

**Gas:** An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

POWER CORD LOCATIONS  
6.2, 7.2 & 7.4 CU. FT. DRYERS



Rear view

\*Add 2" for GTD75

NEMA receptacle codes:

3-prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle.  
4-prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle.

Gas dryer electric rating:

120V, 60Hz, 6A – 6.2, 7.2 and 7.4 cu. ft. dryers  
120V, 60Hz, 9A – 7.8 cu. ft. dryers

**Gas (BTU/HR):** 22,000 for 6.2, 7.2 and 7.4 cu. ft. dryers. 16,000 for 7.8 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 7.0 cu. ft. model kit is WE25X0217. 7.8 cu. ft. model kit is WE25M87. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

**Dryer note:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.



PORTABLE/STATIONARY WASHERS & DRYERS


INDIVIDUAL WASHERS	GE
	GNW128PS GNW128SS
CAPACITY	
Capacity (cu. ft.)	2.8 DOE*
FEATURES	
Wash/spin speed combinations	1
Wash/rinse temperatures	4
Number of cycles	8
Regular	
Normal	●
Soak	●
Delicates	●
Speed Wash	●
Heavy Duty cycle	●
Deep Fill	●
Wash Rinse and/or Spin	
Wash mechanism	Infusor
Bleach dispenser	●
Fabric softener dispenser	●
Automatic detergent dispenser	●
Tub lint filter	●
Washer lid type	Black
Spin speed	750 RPM
Easy-roll rollers	●
Basket material	Stainless steel
Fill & drain hoses included	●
APPEARANCE	
Colors available	White
WEIGHTS & DIMENSIONS	
Circuit requirements	120V, 60Hz, 15 or 20 Amps
Dimensions (HxWxD in inches)	37-2/5 x 24 x 24-1/2
Approx. shipping wt. (lbs.)	116

\*Department of Energy.  
\*\*With leveling legs extended.


INDIVIDUAL DRYERS	GE	
	DSKS433EB	DSKP333EC* DSKS333EC
CAPACITY		
Capacity (cu. ft.)	3.6	3.6
FEATURES		
ADA compliant***		● / —
Dry control	Automatic	Automatic
Heat selections	4	3 (timer)
Number of dry cycles	3	3
Auto Perm. Press & Delicate	●	
Auto regular	●	●
Timed regular (min.)	140	150
Air Fluff (min.)	(Heat selection)	30
Separate start switch	●	●
Control location	Mid-band	Top Mid-band
Lint filter	Upfront	Upfront
APPEARANCE		
Colors available**	WW	WW
WEIGHTS & DIMENSIONS		
Exhaust options†	4-way	4-way—rear, bottom, left, right
Circuit requirements	240/208V††, 60 Hertz, 30 Amps	120V, 60 Hertz, 15 Amps
Power cord	No cord	6 feet
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	33-1/4 x 23-7/8 x 24-1/2
Wall-mount kit (available at additional cost)	WMK-35	WMK-35
Approx. shipping wt. (lbs.)	108	108

\*DSKP333EC dryer comes equipped with casters.  
\*\*Colors available: WW = White.  
\*\*\*ADA-qualified based on Americans with Disabilities Act. UFAS compliant with the Uniform Federal Accessibility Standards.  
†DSKS433EB and DSKS333EC are shipped exhausted through the top.  
†Rear-mounted outlet on DSKS433EB (120V, 60 Hertz, 10 Amp, DSKS433EB and DSKS333EC approved for use with washer/dryer stack rack DSDR24F.)  
**Circuit requirements:** An individual, properly grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

TOP VENT INSTALLATION DIMENSIONS (IN INCHES)

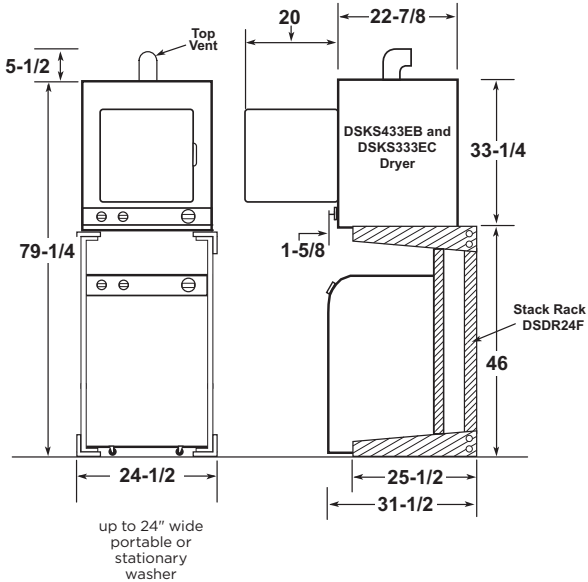

WALL-MOUNT INSTALLATION DIMENSIONS (IN INCHES)

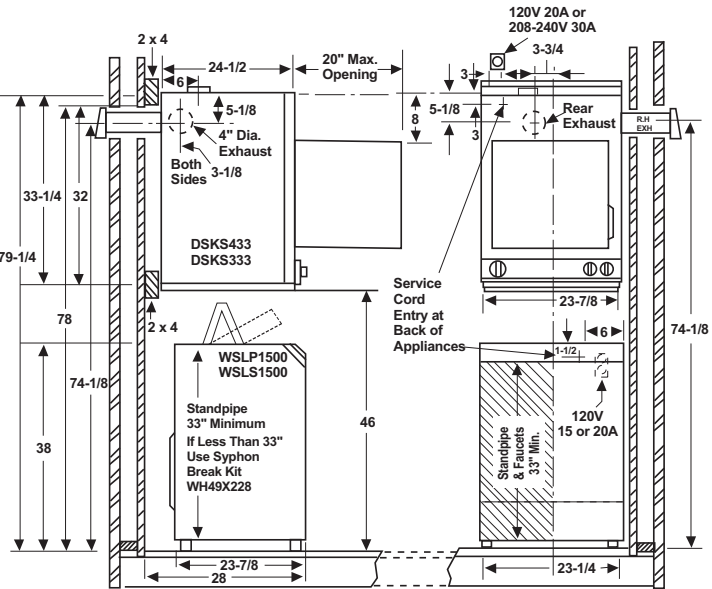


UNITIZED WASHERS & DRYERS

WASHERS	GE		
	GUD27ESSM/GSSM GUD27ESPM/GSPM GUV27ESSM	GUD27EESN GUD27GESN	GUD24ESSM GUD24GSSM
CAPACITY			
Capacity (cu. ft.)	3.8 DOE*	3.9 DOE*	2.3 DOE*
CONTROLS			
Electronic	●	●	●
FEATURES			
Wash/spin speed combinations	1	1	1
Wash temperatures	6	6	6
Auto load sensing	4	●	●
Number of wash cycles	11	12	11
Deep rinse	●	●	●
Deep rinse & spin	●	●	●
Bleach/fabric softener dispensers	●	Bleach	●
Fill & drain hoses (included)	●	●	●
Drive system	Belt	Belt	Belt
Drive system WiFi Connect	Optional (Requires part no. PBX23W00Y0)		
Wash Mechanism	Agitator	Infusor	Agitator


DRYERS			
CAPACITY			
Capacity (cu. ft.)	5.9	5.9	4.4
CONTROLS			
Electromechanical	●	●	●
FEATURES			
Automatic dry control	●	●	●
Number of dry cycles	4	4	4
Cottons	●	●	●
Easy Care	●	●	●
Delicates	●	●	●
Timed dry	●	●	●
Quick Fluff	●	●	●
Dewrinkle	●	●	●
Control location	Mid-band	Mid-band	Mid-band
Exhaust options	3 way—rear, left, right	3 way—rear, left, right	3 way—rear, left, right
Lint filter	●	●	●
APPEARANCE			
Colors available	W/W DG WW	WW	WW
WEIGHTS & DIMENSIONS			
Dimensions (HxWxD in inches)	75-1/2 x 26-4/5 x 30-17/20**	75-7/8 x 26-3/4 x 30-7/8	74-1/2 x 23-3/4 x 27-1/4**
Approx. shipping wt. (lbs.)	271	279	241
LP conversion kit (sold separately)	WE25M74	WE25M74	WE25M73

RATINGS			
Integrated Modified Energy Factor (IMEF)	1.57	1.57	1.57
Integrated Water Factor (IWF)	6.5	6.5	6.5
*Department of Energy. **Depth dimension assumes water hook-up is recessed in the wall. <b>Note:</b> The third prong on GUD27ESSJ/GSSJ plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.			


**Electrical requirements for unitized dryers**  
**GUD27ESSJ: Electric dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V or 120/208V single-phase 60Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.  
**GUD24ESSJ: Electric dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V single-phase 60Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.  
**NOTE:** THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.  
**GUD24GSSJ: Gas dryer**—This appliance should be connected to an individual, properly grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60Hz electrical service and should be protected by 15- or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot-long flexible UL® listed 15-amp power cord to match a 15-amp receptacle.  
**Gas rated** input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.  
**GUD27GSSJ: Gas dryer**—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60Hz electrical service and should be protected by 15-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot-long flexible UL listed 15-amp power cord to match a 15-amp receptacle.  
**Gas rated** input 20,000 BTU/HR. Factory equipped for natural gas.  
**LP gas supply requires a conversion kit.**  
Kits: GUD27GSSJ—WE25M74; GUD24GSSJ—WE25M73  
Have a qualified gas technician install a conversion kit before use.  
**Exhaust information**  
See "Dryer Exhausting Information" on the next page.  
For complete information see installation instructions packed with the product.

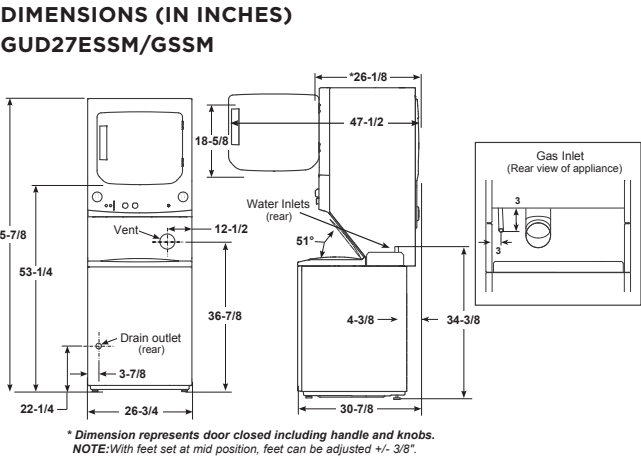

POWER CORD LOCATION  
GUD27ESSM/GSSM



DIMENSIONS (IN INCHES)  
GUD24ESSM/GSSM

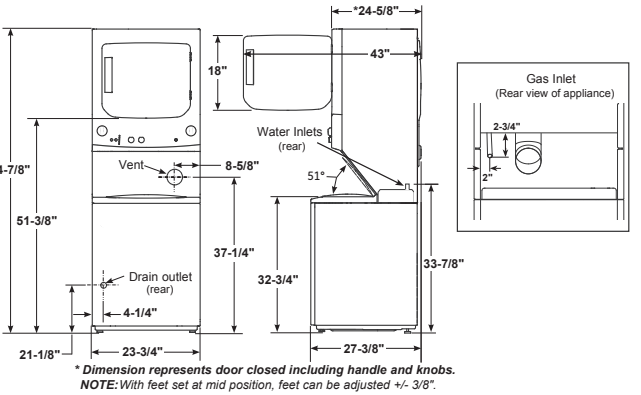

Listed by  
Underwriters  
Laboratories


Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

GENERAL INFORMATION FOR DRYER EXHAUSTING


Minimizing the length of ductwork and the number of turns in an exhaust system minimizes the potential for lint to settle and accumulate in the exhaust duct and in the interior cabinet of the dryer. Refer to your specific dryer installation instructions for recommended duct length.

**1. Exhaust duct terminations**  
All exhaust systems must be terminated in a manner that will prevent backdrafts from outside as well as prevent birds or other wildlife from building nests or taking refuge in the ductwork. The termination should present minimal resistance to the flow of exhaust air and should require little maintenance to prevent clogging. **The preferred termination is either a dampered wall cap with a 4"-wide opening or a movable louvered wall cap.** A 2-1/2" wall cap restricts airflow and increases drying time. Wall caps must be installed with the opening down, and installed at a minimum of 12" above ground level or any other obstruction. Special consideration should be given in areas where heavy snow drifts are likely to occur to ensure the wall cap does not become obstructed. Other types of terminations are acceptable providing **they are equivalent to the 4" dampered wall cap.** They must contain at least 14 square inches of ventilation area, afford adequate protection against backdrafts, and meet all other requirements listed here.



**Exhaust ducts must not contain screens or other filtering devices which may become clogged with lint.** The dryer exhaust must not terminate in an ordinary chimney, under an enclosed house floor or crawl space, or into an attic, since any accumulated lint could create a fire hazard and the moisture could cause damage. **Never terminate the exhaust into a common duct or plenum with a kitchen hood exhaust since the combination of grease and lint could create a fire hazard.**

**2. Separation of turns in the ductwork**  
All turns in the exhaust system, external to the dryer itself, including the distance from the last turn to the dampered wall cap, should be separated by at least 4' of straight metal duct. This will reduce the added resistance which results from rapid changes in airflow direction inside the ducting. If two turns must be closer than 4', deduct 10' from the maximum lengths shown in the chart on the next page.



**3. Treatment of turns other than 90°**  
One turn of 45° or less may be ignored. Two such turns should be treated as one 90°. Each turn over 45° should be treated as one 90°. Refer to specific dryer installation for maximum duct lengths and for allowable number of 90° bends. In determining the number of turns for an exhaust system, one 90° turn must be added for the bend made inside the cabinet whenever the dryer is exhausted through the right, left or bottom. NOTE: Some dryers are limited to only rear exhausting. Consult the installation instructions for the type of dryer being used.

**4. Connecting the dryer to house vent**  
**To reduce the risk of fire, never use plastic or other combustible ductwork.**

Rigid Metal Transition Duct

- For best drying performance, a rigid metal transition duct is recommended.
- Rigid metal transition ducts reduce the risk of crushing and kinking.

UL listed Flexible Metal (Semi-Rigid) Transition Duct

- If rigid metal duct cannot be used, then UL listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077).
- Never install flexible metal duct in walls, ceilings, floors or other enclosed spaces.
- Total length of flexible metal duct should not exceed 8 feet (2.4m).
- For many applications, installing elbows at both the dryer and the wall is highly recommended (see illustrations). Elbows allow the dryer to sit close to the wall without kinking and/or crushing the transition duct, maximizing drying performance.
- Avoid resting the duct on sharp objects.


UL listed Flexible Metal (Foil-Type) Transition Duct

- In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct.
- In Canada and the United States, only the flexible metal (foil-type) ducts that comply with the "Outline for Clothes Dryer Transition Duct Subject 2158A" shall be used.
- Never install flexible metal duct in walls, ceilings, floors or other enclosed spaces.
- Total length of flexible metal duct should not exceed 8 feet (2.4m).
- Avoid resting the duct on sharp objects.

See Installation instructions for complete details.

**5. Sealing of joints**  
The chimney should avoid leaks. Duct joints should be made air- and moisture-tight by wrapping the overlapped joints with duct tape. The male ends of each section of duct should point away from the dryer. **Do not assemble the ductwork with screws or other fasteners that extend into the duct. They will serve as a collection point for lint.**

**6. Water condensation**  
Condensation in a dryer exhaust system is caused by the moisture in the exhausted air contacting the cold inner surfaces of the ductwork. Condensation, which forms at the beginning of the drying cycle, will dissipate quickly after the ductwork becomes heated. If the ductwork passes through an area which keeps it cool throughout the drying cycle, considerable condensation within the duct can be expected. This can result in rapid accumulation of lint in the ductwork. Ductwork which runs through an unheated area or is situated adjacent to an air conditioning duct should be insulated to avoid such condensation problems. Joints should be tight to avoid leaks and, where feasible, the duct should be dropped 1/16" per foot toward the termination.



**7. Accessibility for cleaning**  
Since it may be necessary from time to time to remove lint from the inside of the ductwork, it is important that the exhaust system be installed with a provision for periodic inspection and cleaning. Some provision should be made for access to turns and straight runs of duct installed in an enclosed area, such as above plastered ceilings. Special consideration should be given to the amount of maintenance required for roof caps on vertical installations, since the user cannot be expected to make frequent inspections or cleanings.

**Single family-type dwellings**  
For more detailed information, refer to the installation instructions for the specific dryer model selected.

**Mobile or manufactured home installation**  
Gas dryer installation must conform with local Gas Codes and with CGA B149.1 or B149.2 (Installation code for Gas Burning Appliances and Equipment). All dryer Installations must conform to Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 32-80. The dryer must be exhausted to the outdoors with the termination securely fastened to the mobile home structure. The exhaust MUST NOT be directed underneath the mobile home.


MULTI-UNIT DRYER INSTALLATION

(CONTINUED)

Chimney exhaust system

The chimney must be fire-resistant and large enough to accommodate the volume of air exhausting from the dryers. Consideration must be made for lint buildup, excessive chimney pressures, backdrafts and other technical factors which will influence the performance and the safety of the system. A lint clean-out access door should be included at the bottom of the chimney. Each dryer duct must have a 4"-diameter backdraft damper, adjusted so that it will just close with the dryer inoperative. This will prevent the exhaust and lint of one dryer from going into another dryer and its room. The duct system for each individual dryer must meet the turn and length requirements as noted on this page.

**Use the specs for a 2-1/2" exhaust hood for proper dryer performance.** Include the 90° elbow and all ducting in the chimney in your calculations. The 22" (minimum) of vertical ducting in the chimney reduces back pressure and is required for proper dryer performance. **See Illustration No. 3.**

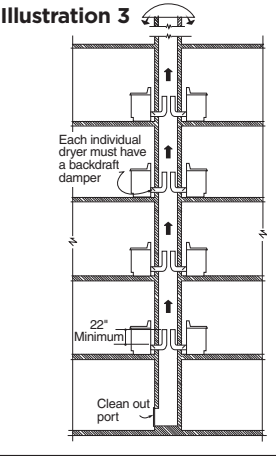

SPECIAL INSTALLATION REQUIREMENTS

Alcove or closet installation

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outdoors. See exhaust information on this page and installation instructions.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
  - 1" front and rear
  - 1" top
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.

Bathroom or bedroom installation

- The dryer MUST be exhausted to the outdoors. See installation instructions.
- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code, NFPA70, and National Fuel Gas Code, NFPA54, for gas dryers.

Minimum clearances other than alcove or closet installations

- Minimum clearances to combustible surfaces:
  - 0" both sides
  - 1" rear

Side or bottom exhaust

- For 7.0 or 6.0 cu. ft. models, see installation instructions – WE25X10015.
- Unitized models do not require a kit for side venting.

For more information on venting kits and accessories, please call 1-800-GE-CARES.

DRYER EXHAUSTING INFORMATION

For complete information see installation instructions packed with dryer.

Important note:

- 6.0 and 7.0 cu. ft. dryers require additional parts to convert to side venting.
- GUD does not require a kit for side venting as rear elbow pivots 360°.

Ducting materials

For best performance, the dryer should be vented with 4" diameter all-rigid metal exhaust duct. If rigid metal duct cannot be used, then UL listed flexible metal (semi-rigid) ducting can be used (PM08X10085 or WX08X10085). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instructions packed with your dryer for complete instructions when using flexible metal (foil type) ducting. See installation instructions for complete information.

EXHAUST LENGTH CALCULATION:

- Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
- The maximum length of 4" diameter rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.  
See table in installation instructions. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Dryers **must** be exhausted to the outside.

**Caution:** For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent backdrafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

DRYER EXHAUSTING INFORMATION—  
USE METAL DUCT ONLY VERTICAL AND  
HORIZONTAL DUCTING

BEST PERFORMANCE			
Maximum length of 4" diam. rigid metal duct			
Exhaust hood type			
	Number of 90° turns	A 4" opening	B 2-1/2" opening
Domestic dryer models	0	200 ft.	175 ft.
	1	185 ft.	165 ft.
	2	175 ft.	155 ft.
	3	165 ft.	145 ft.
	4	155 ft.	135 ft.
GE Front Load Long Vent 7.0 cu. ft. capacity electric dryer (GFDL and GUV27E)	5	145 ft.	125 ft.
	0	120 ft.	90 ft.
	1	100 ft.	75 ft.
	2	85 ft.	65 ft.
	3	70 ft.	55 ft.
Long Vent 6.2, 7.2 and 7.4 cu. ft. capacity electric & gas dryers (GTD33, GTD42, GTD45, GTD65, GTD72, GTD84, GTX22, GTX33 and GTX42)	4	60 ft.	45 ft.
	5	55 ft.	35 ft.
All 6.0 - 8.3 cu. ft. capacity models electric and gas dryers (GFDN, GFD, GTD, GTX, HTDP, HTDX)	0	90 ft.	60 ft.
	1	60 ft.	45 ft.
	2	45 ft.	35 ft.
	3	35 ft.	25 ft.
	4	25 ft.	15 ft.
DCVH480	0	90 ft.	60 ft.
	1	60 ft.	45 ft.
	2	45 ft.	35 ft.
	3	35 ft.	25 ft.
	0	46 ft.	37 ft.
All 3.6 cu. ft. (DSKS, DSKP) electric dryers	1	37 ft.	30 ft.
	2	30 ft.	22 ft.
	3	23 ft.	15 ft.
	0	56 ft.	42 ft.
	1	48 ft.	34 ft.
Laundry Center GUD27	2	40 ft.	26 ft.
	3	32 ft.	18 ft.
	0	43 ft.	36 ft.
	1	33 ft.	26 ft.
	2	24 ft.	16 ft.
Laundry Center GUD24			

For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart. When calculating the total vent system length, you must add all the straight portions and elbows of the system (including the transition duct). Laundry Center length includes factory-installed elbow that does not impact vent length.

DRYER EXHAUST LENGTH\*  
GUD27ESSM/GSSM

	RECOMMENDED MAXIMUM LENGTH	
	EXHAUST HOOD TYPES	
	Recommended	Use only for short run installations
NUMBER OF 90° ELBOWS	RIGID METAL	RIGID METAL
0	56 FT.	42 FT.
1	48 FT.	34 FT.
2	40 FT.	26 FT.
3	32 FT.	18 FT.

GUD24ESSJ/GSSJ

0	43 FT.	36 FT.
1	33 FT.	26 FT.
2	24 FT.	16 FT.

DRYER EXHAUST LENGTH\*  
GUV27ESSM

	BEST PERFORMANCE	
	MAXIMUM LENGTH OF 4" DIAMETER RIGID METAL DUCT	
	EXHAUST HOOD TYPES	
NUMBER OF 90° ELBOWS	A 4" OPENING	B 2-1/2" OPENING
0	200 FT.	175 FT.
1	185 FT.	165 FT.
2	175 FT.	155 FT.
3	165 FT.	145 FT.
4	155 FT.	135 FT.
5	145 FT.	125 FT.

For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart.

\*When calculating the total vent system length, you must add all the straight portions and elbows of the system (including the transition duct).

Laundry Center length includes factory-installed elbow that does not impact vent length.

See page 225 for warranty information.

geappliances.com

MULTI-UNIT DRYER INSTALLATION

Multi-unit systems

Accurate installation of a good dryer exhaust system in multi-family construction is especially important. The restrictions applied by this type of construction should cause the planner to be more concerned than in single-family construction.


When the length of the exhaust duct or the number of turns in the system exceeds the maximum limitations recommended by the dryer manufacturer, the planner must seek an alternate solution. One option is to install a common ducting system that is capable of handling the discharge of several dryers at various points along the system.

The scope of the subject is far too broad to be extensively described within this publication. Sufficient information is presented, however, to make the planner aware of the importance of special attention to the subject. Two types of common ducts are generally used: (1) the common dryer exhaust stack with an auxiliary roof fan and (2) the chimney exhaust.

**Stack and chimney designs and exhaust fans must meet all local code requirements.** It is suggested that professional engineering counsel should be sought in these matters. Dryers should be installed as close to the common duct as possible. Dryers' discharges must be offset to prevent one unit from exhausting directly into another.

See Illustration No. 1.


Illustration 1



Common fan-assisted dryer exhaust stack (auxiliary roof fan systems)

The stack outlet (see Illustration No. 2) must be fitted to a continuous-duty exhaust fan rated to handle the stack air volume for the total number of dryers on the system. Periodic cleaning of the exhaust fan is necessary to maintain efficient operation. The bottom of the stack should contain a barometric damper to prevent drawing air through the dryers not in use, and a lint clean-out access door. The damper should be adjusted to just open with all dryers on and the continuous-duty exhaust fan operating. The weighted damper in the individual dryer ducts should be adjusted so that it will just close with all dryers off and the continuous-duty exhaust fan operating. The fan should be running at all times. The duct system from each individual dryer must meet the turn and length requirements as noted on the next page. The required stack diameter for air volumes of 200 CFM to 3,000 CFM can be determined from Illustration No. 4 and calculations on the chart to the right.

Illustration 2

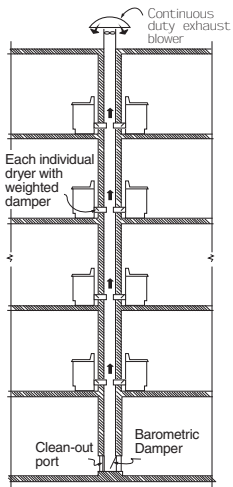


How to use Illustration No. 4

Airflow value: 150 CFM. Assume installation contains eight (8) dryers operating at the same time. Stack air volume (Q) = 150 x 8 = 1200 CFM (Q) is air volume that stack must be capable of handling in the event all dryers are running at one time. Therefore, the stack diameter must be:

$$D = \sqrt{\frac{576Q}{\pi V}} = \sqrt{\frac{576 \times 1200}{\pi \times 1500}} = \sqrt{147} \approx 12 \text{ inches}$$

Illustration 4

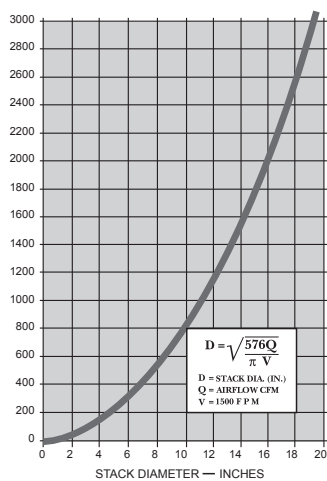

Or read directly from Illustration No. 4 by placing 1200 on the vertical scale and reading 12 on the horizontal scale. The stack diameter should be 12 inches to handle the required volume of air and the continuous-duty exhaust blower should be rated to handle this volume while maintaining an air velocity of 1500 ft./minute.

See page 225 for warranty information.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



ELECTRIC WATER HEATERS

	GE							
	GE50T10BAM GE50T08BAM	GE50S10BAM GE50S08BAM	GE40T10BAM GE40T08BAM	GE40S10BAM GE40S08BAM	GE40L08BSM GE40L08BAM	GE30T10BAM GE30T08BAM	GE30S10BAM GE30S08BAM	GE30L08BSM GE30L08BAM
Rated capacity (gallons)	50	50	40	40	36	30	30	26
Nominal capacity (gallons)	50	50	40	40	36	30	30	26
FEATURES								
Family size*	3-5	3-5	2-4	2-4	2-4	1-3	1-3	1-3
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Temperature setting	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F
Temperature setting factory default	120°F	120°F	120°F	120°F	120°F	120°F	120°F	120°F
Drain valve type	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic	Plastic Plastic	Brass Plastic	Brass Plastic	Plastic Plastic
WEIGHT & DIMENSIONS								
Approx. shipping weight (lbs.)	154	161	139	133	145	113	111	114
Height to water connection (in.)	63-7/8	53	65-1/2	52-7/8	33-5/8	51-3/8	42	32-7/8
Tank dimensions (diameter x height in in.)	22 X 62-3/8	24 x 51-1/2	20 x 64	22 x 51-3/8	27 x 32-3/4	20 x 49-7/8	22 x 40-3/8	24 x 31-1/4
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS								
Electrical circuit direct wired	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated
Heating elements	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Copper Copper	Stainless steel Copper	Stainless steel Copper	Copper Copper
Element density	Low High	Low High	Low High	Low High	High High	Low High	Low High	High High
Lower element (watts)	5,500	5,500	5,500	5,500	5,500	5,500	5,500	5,500
Upper element (watts)	5,500	5,500	5,500	5,500	5,500	5,500	5,500	5,500
Uniform energy factor (UEF)	0.93	0.93	0.92	0.92	0.92	0.92	0.92	0.92
First hour rate (FHR) (gallons)	76	76	65	66	63/61	54	53	58/53
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
WARRANTY								
Parts warranty	10/8 years	10/8 years	10/8 years	10/8 years	8/8 years	10/8 years	10/8 years	8/8 years

\*Household sizing based on back-to-back showers, 8 minutes long.

ELECTRIC WATER HEATERS WITH ELECTRONIC CONTROL

	GE					
	GE50T12BLM GE50T10BLM	GE50S12BLM GE50S10BLM	GE40T12BLM GE40T10BLM	GE40S12BLM GE40S10BLM	GE30T12BLM GE30T10BLM	GE30S12BLM GE30S10BLM
Rated capacity (gallons)	50	50	40	40	30	30
Nominal capacity (gallons)	50	50	40	40	30	30
FEATURES						
Family size*	3-5	3-5	2-4	2-4	1-3	1-3
Control type	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app
Operating modes	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation
Temperature setting	100-140°F	100-140°F	100-140°F	100-140°F	100-140°F	100-140°F
Temperature setting factory default	120°F	120°F	120°F	120°F	120°F	120°F
Drain valve type	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic
Built-in WiFi with app	●	●	●	●	●	●
Diagnostic feedback	●	●	●	●	●	●
Sensing anode	● / —	● / —	● / —	● / —	● / —	● / —
WEIGHT & DIMENSIONS						
Approx. shipping weight (lbs.)	154	161	139	133	113	111
Height to water connection (in.)	63-7/8	53	65-1/2	52-7/8	51-3/8	42
Tank dimensions (diameter x height in in.)	22 x 62-3/8	24 x 51-1/2	20 x 64	22 x 51-3/8	20 x 49-7/8	22 x 40-3/8
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS						
Electrical circuit direct wired	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated
Heating elements	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper
Element density	Low High	Low High	Low High	Low High	Low High	Low High
Lower element (watts)	5,500	5,500	5,500	5,500	5,500	5,500
Upper element (watts)	5,500	5,500	5,500	5,500	5,500	5,500
Uniform energy factor (UEF)	0.93	0.93	0.92	0.92	0.92	0.92
First hour rate (FHR) (gallons)	78	75	66	65	59	60
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
WARRANTY						
Parts warranty	12/10 years	12/10 years	12/10 years	12/10 years	12/10 years	12/10 years

\*Household sizing based on back-to-back showers, 8 minutes long.

FLEXIBLE-CAPACITY ELECTRONIC WATER HEATERS

	GE		
	GE50S10BMM	GE40S10BMM	GE30S10BMM
Rated capacity at normal setting (gallons)	50	40	30
Capacity at X-High setting* (gallons)	80	64	48
FEATURES			
Family size on X-High setting**	3-6	2-5	1-4
Control type	Electronic with digital display	Electronic with digital display	Electronic with digital display
Operating modes	Normal/Vacation	Normal/Vacation	Normal/Vacation
Integrated, electronic mixing valve	●	●	●
Capacity settings	Normal/High/X-high	Normal/High/X-high	Normal/High/X-high
Temperature setting	100-140°F	100-140°F	100-140°F
Temperature setting factory default	120°F	120°F	120°F
Drain valve type	Brass	Brass	Brass
Built-in WiFi with app	●	●	●
Diagnostic feedback	●	●	●
Sensing anode rod	●	●	●
WEIGHT & DIMENSIONS			
Approx. shipping weight (lbs.)	171	143	121
Height to water connection (in.)	61	60-7/8	49-7/8
Tank dimensions (diameter x height in in.)	24 x 59-1/2	22 x 59-3/8	22 x 48-3/8
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"
Connection sizes—water inlet (mnpt)	3/4"	3/4"	3/4"
POWER/RATINGS			
Electrical circuit direct wired	240V/60Hz/30A min.	240V/60Hz/30A min.	240V/60Hz/30A min.
Heating elements	Stainless steel	Stainless steel	Stainless steel
Element density	Low	Low	Low
Lower element (watts)	5,500	5,500	5,500
Upper element (watts)	5,500	5,500	5,500
Energy factor	0.93	0.92	0.92
First hour rating (FHR) (gallons)	75 (normal setting)	65 (normal setting)	59 (normal setting)
Operating water pressure	20-125 PSI	20-125 PSI	20-125 PSI
WARRANTY			
Parts warranty	10 years	10 years	10 years

\*Versus comparable water heater without mixing valve at 120° F setting and 58° F inlet water temperature.

\*\*Household sizing based on back-to-back showers, 8 minutes long.

SOLAR WATER HEATERS

	GE		
	GT50C10BAM GEOSPRING™ SOLAR	GT40C10BAM GEOSPRING SOLAR	GT25C10BAM GEOSPRING SOLAR
Rated capacity (gallons)	51	38	24
FEATURES			
Configuration	Integrated collector storage	Integrated collector storage	Integrated collector storage
Cold/hot water connections (in.)	3/4 mnpt	3/4 mnpt	3/4 mnpt
Collector inclination angle from horizontal	20° to 75°	20° to 75°	20° to 75°
Liquid type	Water	Water	Water
Maximum operating pressure (psi)	60	60	60
Net collector area (sq. ft.)	23	17	10
WEIGHT & DIMENSIONS			
Approx. weight (with mount, no water) (lbs.)	168	125	83
Approx. weight (with mount, with water) (lbs.)	593	441	279
Collector outer dimensions (in.)	86 x 43 x 8	86 x 32 x 8	86 x 20 x 8
Maximum height mount 45°/30° (in.)	36/28	28/22	19/16
WARRANTY			
Parts warranty	10 years	10 years	10 years

WATER SOFTENERS

	GE				
	GXSHC40N	GXMH31H	GXSH45V	GXSH40V	GXSF30V
CAPACITY					
Capacity (grains)	40,000	31,100	45,100*	40,000*	30,100
FEATURES					
	●				
WiFi Connect	Water Usage Tracking Water Flow Alerts Remote Water Shutoff Salt Reminders				
Efficiency (grains per lb.-salt)	5,100	4,240**	5,090**	5,100**	4,700**
Max. hardness removal (gpg)	110	120	160	110	95
Max. clear water iron reduction (ppm)	8	3	10	8	8
Resin filter type	Standard mesh	Standard mesh	Standard mesh	Standard mesh	Standard mesh
Resin quantity (cu. ft.)	1.1	.98	1.25	1.1	.83
Activated charcoal quantity (cu. ft)	N/A	.26	N/A	N/A	N/A
Resin tank size (in.)	9 x 40	10 x 40	10 x 40	9 x 40	9 x 35
Salt capacity (lbs.)	230	230	230	230	200
Regeneration time (min.)	94 to 134	105 to 152	105 to 152	94 to 134	73 to 104
Service flow rate (at 15 psi drop)	9.5	8	9.5	9.5	7.5
Installation pack	●	●	●	●	●
Batteryless memory	●	●	●	●	●
Electronic controls	●	●	●	●	●
SmartSoft™ technology	●	●	●	●	●
Custom Select™ blending valve	●	●	●	●	
Salt Saver button/light	Automatic				
"Days to Empty" indicator	●	●	●	●	●
Low salt indicator	●	●	●	●	●
Status light indicator	●	●	●	●	●
Sediment filter	●	●	●	●	
Audible alarm	●	●			●
Advanced system monitor	●		●	●	
Valve size	High flow	High flow	High flow	High flow	Standard flow
Plumbing connections	Up to 1-1/4"	Up to 1-1/4"	Up to 1-1/4"	Up to 1-1/4"	Up to 1"
Water supply maximum clear water iron (ppm)***	8	3	10	8	8
Water pressure limits (minimum-maximum psi)*	20-125	20-125	20-125	20-125	20-125
Rated capacity	.050 ppm	2,282,000 gal.			
at chlorine	.075 ppm	1,520,000 gal.			
concentration**	1.0 ppm	1,140,000 gal.			
of:	1.5 ppm	760,000 gal.			
	2.0 ppm	570,000 gal.			
APPEARANCE					
Style	Sculpted	Sculpted-tall	Sculpted-tall	Sculpted-tall	Sculpted-short
Unit color/trim	Light gray/Blue	Light gray/Blue	Light gray/Dark gray	Light gray/Dark gray	Light gray/Dark gray
Electronic demand driven	●	●	●	●	●
WEIGHTS & DIMENSIONS					
Approx. ship. wt. (lbs.)	107	119	119	105	91
Overall W x H x D (in.)	14 -7/8 x 47-5/8 x 22-7/16	14-7/16 x 47-5/8 x 22-7/16	14-7/16 x 47-5/8 x 22-7/16	14-7/16 x 47-5/8 x 22-7/16	14-7/16 x 43-1/4 x 22-7/16
POWER/RATINGS					
Electrical rating	24V, 60Hz	24V, 60Hz	24V, 60Hz	24V, 60Hz	24V, 60Hz

This system conforms to NSF/ANSI 42 & 44 for the specific performance claims as verified and substantiated by test data.

\*Testing was performed using pellet grade sodium chloride as the regenerate salt.  
\*\*Efficiency rating is valid only at the lowest stated salt damage. These softeners were efficiency rated according to NSF/ANSI 44.

\*\*\*Extent of iron removal may vary with conditions. The capacity to reduce clear water iron is substantiated by WQA test data. State of Wisconsin requires additional treatment if water supply contains greater than 5 ppm clear water iron.  
\*Canada working pressure limits: 1.4-7.0 kg/cm2.

\*\*Typical residential chlorine concentration is 0.5 to 1.0 ppm.  
**Important:** All units must be installed according to local codes.  
**Note:** Before installing, see installation instructions packed with product for complete details, or call GE QuickSpecs 800-432-3729.

UNDERSINK REVERSE OSMOSIS FILTRATION SYSTEMS

	GE
	GXRQ18NBN GRNQ18NBN
CAPACITY	
Tank size (gallons)	3
FEATURES	
Faucet	Brushed Nickel
Faucet color	Brushed Nickel
Faucet monitor	Electronic timer
Faucet mounting	Vertical
Filter change indicator	LED
Feed water pressure (psi)	40 Min.-100 Max.
Feed water temperature	40°-100°F
Maximum feed water TDS (ppm)	2,000
Maximum hardness (@ 6.9 pH)	10 grains
Feed water pH limits	4-10
Daily production rate per NSF 58 (gallons per day)	
Process water used (per gal.)	10.4
Auto shut-off	●
FILTERS & MEMBRANE	
Quick-Replace filter design	●
RO membrane	FQ18MN
Filters	FQ18MN/FQ18PN
Filter life	6 months
Filtration level	Premium
Impurities reduced	95 impurities See chart to the right.
Fitting style	Push-to-connect
Water inlet valve	Saddle valve
Undersink installation kit	●
FILTER APPEARANCE	
Style	Compression
Unit color	White
Filter housing	White
Mounting bracket	Vertical
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	14.2
Overall W x H x D (in.)	9-1/4 x 3-5/8 x 12-1/2 14 x 9 x 9
POWER/RATINGS	
Faucet monitor power requirement	1 CR2032 lithium 3v (included)

\*Theoretical tank capacity. When tested according to NSF/ANSI Standard 58 at 50 psig inlet pressure, tank capacity is 2.3 gallons.

\*\*Feed water = 50 psig, 77°F, pH = 7.5 ± 5 and 750 ppm TDS as sodium chloride. Product water produced, amount of waste and percent rejection will vary with changes in pressure, temperature and total dissolved solids. Feed water over 10 grains of hardness may affect performance of the filtration system.

GXRQ18NBN (Impurities Reduced)	
Chlorine Taste and Odor, Particulates (Sediment)	Dichloroacetonitrile (haloacetonitrile)
Ammonium	Dinoseb
Asbestos	Endrin
Arsenic	Estrone
Barium	Ethylbenzene
Bicarbonate	Ethylene dibromide
Bromide	Heptachlor
Cadmium	Heptachlor epoxide
Chloride	Hexachlorobutadiene
Chromium (hexavalent)	Simazine
Chromium (trivalent)	Styrene
Copper	TCEP
Cysts	TCPP
Fluoride	Tetrachloroethylene
Lead	Toluene
Magnesium	Trans-1,2-dichloroethylene
Nitrate	Tribromoacetic acid
Nitrite	Trichloroacetonitrile (haloacetonitrile)
Radium 226/228	Trichloroethylene
Selenium	Trimethoprim
Sodium	Xylenes VOC Surrogate
Sulfate	1,1,1-trichloro-2-propanone (haloketones)
Tannin	1,1,1-trichloroethane
TDS	1,1,2,2-Tetrachloroethylene
Turbidity	1,1,2-trichloroethane
Zinc	1,1-dichloro-2-propanone (haloketones)
Alachlor	1,1-dichloroethylene
Atrazine	1,2,4-Trichlorobenzine
Atenolol	1,2-dichloroethane
Benzene	1,2-dichloropropane
Bisphenol A	2,4,5-TP (silvex)
Bromochloroacetonitrile (haloacetonitrile)	2,4-D
Bromodichloromethane (trihalomethanes)	Hexachlorocyclopentadiene
Bromoform (trihalomethanes)	Ibuprofen
Carbamazepine	Lindane
Carbofuran	Linuron
Carbon Tetrachloride	MTBE
Chlorobenzene	Meprobamate
Chlorodibromomethane (trihalomethanes)	Methoxychlor
Chloroform (trihalomethanes)	Metolachlor
Chloropicrin	Naproxen
cis-1,2-dichloroethylene	Nonyl phenol
cis-1,3-dichloropropylene	o-Dichlorobenzene
DEET	p-Dichlorobenzene
Dibromoacetonitrile (haloacetonitrile)	PFOA
Dibromochloropropane	PFOS
	Pentachlorophenol
	Phenytion

WHOLE HOME FILTRATION SYSTEM

	GE					
	GXWH70M GNWH70M	GXWH50M	GXWH40L**	GXWH35F** GNWH38S	GXWH20S	GXWH04F**
FEATURES						
Feed water pressure (psi)	20 min.-125 max. 25 min.-125 max.	20 min.-125 max.	20 min.-100 max.	20 min.-125 max.	20 min.-125 max.	20 min.-125 max.
Feed water temperature	40°-100°F	40°-100°F	40°-100°F	40°-100°F	40°-100°F	40°-100°F
Rated Flow Rate (gpm)	4.0	4.0	4.0	4.0	4.0	4.0
Maximum Flow Rate (gpm)	12.0	12.0	15.0	15.0	12.0	12.0
	Water Usage Tracking Water Flow Alerts Remote Water Shutoff Salt Reminders					
WiFi Connect	Connected alerts/monitoring on smartphone	Remote timer	Remote timer	Remote timer	Remote timer	Remote timer
Filter change indicator						
	FTHLM (Premium) FTHTM (Advanced) FTHPM (Basic)	FTHLM (Premium) FTHTM (Advanced) FTHPM (Basic)	FXHTC (Advanced) FXHSC (Basic)	FXHTC (Advanced) FXHSC (Basic)	FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)	FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)
Filters						
Port size	3/4" (1" requires additional fitting)	3/4" (1" requires additional fitting)	1"	1"	3/4"	3/4"
Port threads/connections	3/4" Push-to-connect	3/4" Push-to-connect	NPT	NPT	NPT	NPT
Compatible pipe connections	Vertical or horizontal	Vertical or horizontal	Horizontal only	Horizontal only	Horizontal only	Horizontal only
Pressure relief valve	●	●	●	●	●	●
Mounting bracket & hardware	●	●	●	●	●	●
Wrench	N/A	N/A	●	●	●	●
APPEARANCE						
Style	Twist lock (open sump)	Twist lock (open sump)	Drop-in style (open sump)	Drop-in style (open sump)	Drop-in style (open sump)	Drop-in style (open sump)
Unit color	White	White	White	White	White	White
Filter housing	Clear	Clear	Clear	Opaque	Clear	Opaque
WEIGHTS & DIMENS.						
Approx. shipping wt. (lbs.)	11.50/16.01	10.8	9.75	7.50	4	2.50
Overall W x H x D (in.)	15-1/2 x 12-1/4 x 14-1/2	15-1/2 x 12-1/4 x 14-1/2	8 x 16-3/4 x 8	7-3/4 x 13-1/2 x 7-1/2	5-1/2 x 14-1/2 x 5-1/2	5-1/4 x 12-1/4 x 5-1/4

\*\*Filter not included

WHOLE HOME FILTERS

	GXWH50/70 REPLACEMENT FILTERS			HIGH-FLOW DROP-IN REPLACEMENT FILTERS		STANDARD-FLOW DROP-IN REPLACEMENT FILTERS			
	FTHLM	FTHTM	FTHPM	FXHTC	FXHSC	FXWTC	FXUSC	FXWPC	FXWSC
FILTER TYPE	Carbon block	Granulated carbon	Polypropylene	Granulated carbon	Pleated paper	Carbon paper	Polyspun	Pleated paper	String wound
Filter capacity (gallons)	15,000	20,000	15,000	30,000	24,000	700	16,000	16,000	16,000
Filter life	3 months	3 months	3 months	3 months	3 months	3 months	3 months	3 months	3 months
Filtration level	Premium	Advanced	Basic	Advanced	Basic	Advanced	Basic	Basic	Basic
Lead reduction	●								
Chlorine: Taste & Odor reduction	●	●		●		●			
Particulate reduction	0.5 micron	5 micron	30 micron	25 micron	30 micron	5 micron	30 to 50 micron	30 micron	30 micron
Sand reduction	●	●	●	●	●	●	●	●	●
Soil reduction	●	●	●	●	●	●	●	●	●
Silt reduction	●	●	●	●	●	●	●	●	●
Sediment reduction	●	●	●	●	●	●	●	●	●



UNDERSINK FILTRATION SYSTEMS

	QUICK-REPLACE FILTER SYSTEMS			DROP-IN FILTER SYSTEMS
	GXK285JBL GNK285KBL	GXK185KBL	GXULQK	GX1S01R**
FEATURES				
Faucet	Filtration controller	Filtration controller		UNFCTFBL (purchase separately)
Filtration controller	Chrome	Chrome		
Faucet monitor	Electronic timer	Electronic timer		
Faucet mounting	Above sink	Above sink		
Filter change indicator	Red blinking flash	Red blinking flash	Magnetic filter reminder light	
Feed water pressure (psi)	35 min.-120 max.	20 min.-125 max	20 min.-100 max.	35 min.-125 max.
Feed water temperature	33°-100°F	33°-100°F	34°-100°F	34°-100°F
Filtered water flow (gpm)	1.1	0.75	2	
FILTERS & MEMBRANE				
Quick-Replace filter design	●	●	●	
Filter	FQK2J	FQK1K	GXULQR	FXUTC, FXULC, or FXUVC
Filter cartridges	Engineered carbon blocks	Carbon block	Carbon block	Carbon block
Filter capacity	300 gallons	150 gallons	2,000 gallons	See filter options below
Filtration level	Advanced	Advanced	Advanced	See filter options below
Filter life	6 months	6 months	6 months	See filter options below
Pharmaceutical reduction	Select pharmaceuticals	Select pharmaceuticals		
VOC reduction (%)	Select VOCs	Select VOCs		See filter options below
Lead reduction (%)	99.3	99.3	99	See filter options below
Cyst reduction (%)		99.99		See filter options below
Mercury reduction (%)	96	96.2		See filter options below
Chlorine: Taste & Odor reduction (%)	97	97.2	99	See filter options below
Turbidity reduction (%)		98.1		See filter options below
Asbestos reduction (%)				See filter options below
Atrazine reduction (%)	94.5	94.5		See filter options below
Lindane reduction (%)	98.5	98.5		See filter options below
Particulate reduction (%)*	93.3	99	99.8	See filter options below
Fitting style	3/8" Push-to-connect	3/8" Push-to-connect	3/8" Push-to-connect	3/8" NPT
Water inlet valve	Push-to-connect adaptor	Push-to-connect adaptor	Compression fitting	
Undersink installation kit	●	●	●	●
APPEARANCE				
Style	1/4 turn encapsulated	1/4 turn encapsulated	1/4 turn encapsulated	Threaded open sump
Unit color	Light gray	Light gray	White	White
Filter housing	Light gray	Light gray	White	White
Mounting bracket	Horizontal or vertical	Horizontal or vertical	Horizontal or vertical	Vertical
WEIGHTS & DIMENS.				
Approx. ship. wt. (lbs.)	4.0	2.5	3.6	2.3
Overall W x H x D (in.)	7 x 12 x 4-1/2	6-3/4 x 11-1/2 x 5-1/4	8-1/4 x 14-1/2 x 4-1/2	4-3/4 x 13-1/2 x 5
POWER/RATINGS				
Faucet monitor power requirement			1 CR2032 Lithium 3v (included)	
Filtration controller power requirement	2 AA batteries (included)	2 AA batteries (included)		

**Caution:** Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.  
\*0.5-1 micron nominal.  
\*\*Filter not included.

UNDERSINK FILTERS

	DROP-IN REPLACEMENT FILTERS		
	FXUTC	FXULC	FXUVC
FEATURES			
Filtered water flow (gpm)	1	0.6	0.5
FILTERS & MEMBRANE			
Filter cartridges	Carbon block	Carbon block	Carbon block
Filter capacity	3,000 gallons	600 gallons	500 gallons
Filtration level	Basic	Advanced	Advanced
Filter life	6 months	6 months	6 months
VOC reduction (%)			99.8
Lead reduction (%)		99.3	99.3
Cyst reduction (%)		99.99	99.99
Mercury reduction (%)		96.4	96.4
Chlorine: Taste & Odor reduction (%)	97.5	97.5	97.6
Turbidity reduction (%)		97.9	98.5
Asbestos reduction (%)		99	99
Atrazine reduction (%)		90.8	
Lindane reduction (%)		99	96.8
Particulate reduction (%)*	99.3	99.7	99.9

**Caution:** Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

ENERGY STAR® CERTIFIED ELECTRONIC ROOM AIR CONDITIONERS

ENERGY STAR certified	GE						
	230 VOLT		115 VOLT				
	AHY24DZ	AHY18DZ	AHY14LZ	AHY12LZ	AHY10LZ	AHY08LZ	AHQ06LZ
	Yes	Yes	Yes	Yes	Yes	Yes	No
FEATURES							
Refrigerant type	R-410A	R-410A	R-32	R-32	R-32	R-32	R-32
BTUh	23,500/22,900	18,000	14,000	12,000	10,000	8,000	6,000
Voltage	230/208	230/208	115	115	115	115	115
CEER	9.8	11.3	11.3	11.4	11.4	11.4	11.0
Amps	10.4/11.2	6.9/7.5	11.2	9.4	7.8	6	4.7
Watts	2,397/2,336	1,592/1,575	1,220	1,035	865	695	535
Plug type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel
Filter reminder light	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy Saver feature	Yes	Yes	Yes	Yes	Yes	Yes	Yes
24-hour on/off timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidification (pints/hr.)	7.2	4.9	4.1	3.2	2.5	2.1	1.6
Fan speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (high shown) (indoor)	461/380	461/380	280/230	250/210	235/200	220/190	175-155-140
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter type	One-touch lift-out	One-touch lift-out	One-touch lift-out	One-touch lift-out	One-touch lift-out	One-touch lift-out	Slide-out
Chassis	Slide-out	Slide-out	Fixed	Fixed	Fixed	Fixed	Fixed
Window mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window opening height (min. in inches)	19-1/8	19-1/8	15-5/8	14-9/16	14-9/16	13-3/8	13-3/8
Window opening width (min. in inches)	30	30	26-1/8	25	25	24-1/2	21-7/8
Window opening width (max. in inches)	39	39	37-3/4	36-5/8	36-5/8	36	36
Overall dimensions (WxHxD in inches)	25-7/8 x 18-1/4 x 26-5/16	25-7/8 x 18-1/4 x 26-5/16	25-7/8 x 18-1/4 x 26-5/16	25-7/8 x 18-1/4 x 26-5/16	19 x 14-1/2 x 19-13/16	19 x 14-1/2 x 19-13/16	16-7/16 x 12-9/16 x 15
Net weight (lbs.)	127.6	118.8	72.45	66.33	58.3	49.7	38.92
Approx. shipping weight (lbs.)	147.4	138.6	80.35	75.16	66	54.2	43.56

ULTRA-QUIET ROOM AIR CONDITIONERS

FEATURES	GE PROFILE™	
	PHC08LY	PHC06LY
Claims & certification	AHAM, EEV, cUL, Rohs, UL	AHAM, EEV, cUL, Rohs, UL
ENERGY STAR certified	Yes	Yes
Area to cool	250-350	151-250
Cooling BTUh	8,000	6,000
Dehumidification (pts./hr.)	2.1	1.5
EER	11.3	12.2
Ceer rating	11.2	12.1
Cooling—Watts	710	490
Volts/Hertz	115/60	115/60
Plug capacity (Volts/Amps)	125/15	120/10
Cooling—rated cooling amps AHAM	6.2	4.4
Air flow volume CFM High/Medium/Low	240/210/170	200
Energy Saver	Yes	Yes
Installation	EZ Mount	EZ Mount
Chassis type	Fixed	Fixed
Fan speed selections	3 Cooling, 3 Fan Only	3 Cooling, 3 Fan Only
Easy-access washable filter	Yes	Yes
Air discharge	4-way	4-way
Vent/air exchange exhaust	Top	Top
Remote control	Infrared remote control	Infrared remote control
Electronic thermostat	Yes	Yes
Auto restart	Yes	Yes
Digital time, temp display	Yes	Yes
Power cord length (ft.)	6	6
Delay timer	24-Hour on/off	24-Hour on/off
Check filter reminder	Yes	Yes
Sleep function	Through WiFi app	Through WiFi app
Approximate shipping weight (lbs.)	65	68
Min.   Max. window opening width (in.)	26   39-1/2	26-1/16   39-1/4
Minimum window opening height (in.)	13-3/8	13-3/8
Net weight (lbs.)	57	56
Overall dimensions (WxHxD in inches)	19 x 14-3/8 x 18-1/8	21-1/4 x 12-7/16 x 18-1/8

MECHANICAL ROOM AIR CONDITIONER

FEATURES	GE
	AHV05LZ
Refrigerant type	R-32
BTUh	5,050
Voltage	115
CEER	11
Amps	4.1
Watts	455
Plug type	Parallel
Dehumidification (pints/hr.)	1
Fan speeds (Cool/Fan Only)	2/2
CFM (high shown) (indoor)	135
Thermostat	Mechanical
Filter type	Slide-out
Chassis	Fixed
Window mounting	EZ Mount
Window opening height (min. in inches)	13-3/8
Window opening width (min. in inches)	21-7/8
Window opening width (max. in inches)	36
Overall dimensions (WxHxD in inches)	16-7/16 x 12-9/16 x 15
Net weight (lbs.)	35.93
Approx. shipping weight (lbs.)	41.7

WINDOW AIR CONDITIONER WARRANTY

One-year limited warranty on entire unit. In-home service. Parts and labor included. See written warranty for details.

Preliminary specifications subject to change. While limited quantities last.

HEAT/COOL SERIES

	GE			
	AEE24DT	AEE18DT	AEE12DT	AEE08AT
FEATURES				
Refrigerant type	R-410A	R-410A	R-410A	R-410A
BTU-AHAM	24,000/23,600	17,600/17,300	11,800/11,600	8,000
Voltage	230/208	230/208	230/208	115
CEER	9.4	10.7	10.9	10.9
Amps-AHAM	11.3/12.3	7.5/8.1	4.6/4.9	6.5
Watts input	2,550/2,510	1,860/1,820	1,190/1,170	725
Dehumidification (pints/hr.)	8.0	5.1	2.0	1.3
ELECTRIC RESISTANCE HEATING				
BTUh	11,000/8,700	11,000/8,700	11,000/8,700	3,800
Amps	16.0/15.6	16.0/15.6	16.0/14.6	12.0
Watts	3,700/3,070	3,630/3,020	3,550/2,870	1,420
Electronic controls	Yes	Yes	Yes	Yes
Line cord plug	Perpendicular	Perpendicular	Perpendicular	Parallel
Recommended circuit protection (time delay)	20 amps	20 amps	20 amps	15 amps
Fan speeds, heating/cooling	3/3	3/3	3/3	3/3
Fan-Only setting	3	3	3	3
Airflow (CFM) roomside hi/low	470/400	410/360	270/240	270/240
Air exchange exhaust	Yes	Yes	Yes	Yes
Rotary compressor	Yes	Yes	Yes	Yes
Slide-out chassis	Yes	Yes	Yes	Yes
Window installation kit	EZ Mount	EZ Mount	EZ Mount	EZ mount
Window opening height (min. in inches)	19-1/4	18-1/2	16-13/32	16-13/32
Window opening width (min. in inches)	30	26	27	27
Window opening width (max. in inches)	41	41	36	36
Overall dimensions (WxHxD in inches)	26-17/32 x 18-5/8 x 26-17/32	23-5/8 x 17-25/32 x 25-7/16	22-5/8 x 15-7/8 x 23-5/8	22-5/8 x 15-7/8 x 23-5/8
Net weight (lbs.)	135	117	93	80
Approx. shipping wt. (lbs.)	152	128	106	93

Not intended to be a primary source of heat.

PORTABLE AIR CONDITIONERS

	GE					
	APWA14YZMW	APCA14YZMW	APSA13YZMW	APCA12YZMW	APCA10YZMW	APCA09YZMW
FEATURES						
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
BTUH (ASHRAE) (cool/heat)	13,500	13,500	13,000/10,000	12,000	10,000	8,500
BTUH (SACC) (cool/heat)	9,700	9,700	9,450	8,200	6,700	5,600
Recommended room size (sq ft)	550 sq. ft.	250 sq. ft.	550 sq. ft.	450 sq. ft.	350 sq. ft.	250 sq. ft.
Voltage	115	115	115	115	115	115
Amps (cool/heat)	12.0	12.0	12.0/11.0	10.0	8.5	7.5
Watts (cool/heat)	1,350	1,350	1350/1,200	1,150	980	860
Plug type	5-15P	5-15P	5-15P	5-15P	5-15P	5-15P
24-hour on/off timer	Yes	Yes	Yes	Yes	Yes	Yes
Easy-roll casters	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidification (pints/hr.)	87.0	87.0	83.0	77.0	60.0	57.0
Dehumidify auto restart	Yes	Yes	Yes	Yes	Yes	Yes
Fan speeds (Cool/Fan only)	3/3	3/3	3/3/3	3/3	3/3	3/3
CFM (high shown) (indoor)	250	250	250	235	230	175
Thermostat	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor	Thermistor
Filter type	Permanent Mesh	Permanent Mesh	Permanent Mesh	Permanent Mesh	Permanent Mesh	Permanent Mesh
Window exhaust kit	Yes	Yes	Yes	Yes	Yes	Yes
Exhaust hose length (ft.)	5	5	5	5	5	5
Installation	Window kit min/max extension 20"/46"	Window kit min/max extension 20"/46"	Window kit min/max extension 20"/46"	Window kit min/max extension 20"/46"	Window kit min/max extension 20"/46"	Window kit min/max extension 20"/46"
CASE DIMENSIONS						
Height (in.)	32.00	32.00	32.00	28.50	28.50	24.70
Width (in.)	18.50	18.50	18.50	17.00	17.00	15.20
Depth (in.)	15.35	15.35	15.35	14.10	14.10	14.00
Net weight (lbs.)	70.5	70.5	75.0	68.3	60	51.6
Approx. shipping weight (lbs.)	90	90.0	94.0	79.0	76.5	66.4

WALL OUTLETS



Parallel  
115V  
15 Amp



Tandem  
230/208V  
15 Amp



Perpendicular  
230/208V  
20 Amp

Wall outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

**Note:** Aluminum building wiring may pose special problems—consult a qualified electrician.

THROUGH-THE-WALL 24" SERIES

	GE						HEAT/COOL		
	COOL ONLY						AKEQ10DCH	AKEQ12DCH	AKEQ14DCH
	AKCQ08ACH	AKCQ10ACH	AKCQ12ACH	AKCQ10DCH	AKCQ12DCH	AKCQ14DCH	230/208 - 60	230/208 - 60	230/208 - 60
Voltage—frequency (Hz)	115 - 60	115 - 60	115 - 60	230/208 - 60	230/208 - 60	230/208 - 60	230/208 - 60	230/208 - 60	230/208 - 60
COOLING CAPACITY									
BTUH—AHAM	8,550	10,000	12,000	10,200/9,900	12,100/11,750	14,000/14,000	10,000/9,800	12,000/11,600	14,000/13,600
Amps—AHAM	7.1	8.3	10.0	4.5/4.8	5.2/5.6	6.9/7.5	4.6/5.0	5.5/5.9	6.9/7.5
EER	10.6	10.6	10.5	10.6/10.6	10.5/10.5	9.3	9.6/9.6	9.5/9.5	9.3/9.5
CEER	10.6	10.6	10.5	10.6/10.6	10.5/10.5	9.3	9.6/9.6	9.5/9.5	9.3/9.5
ENERGY STAR® certified	Yes	Yes	Yes	Yes	Yes	No	No	No	No
Dehumidification (pints/hr.)	2.5	3.0	3.6	3.0	3.6	3.6	3.0	3.6	3.6
FEATURES									
Refrigerant type/capacity	R-410A 17.64 oz.	R-410A 20.81 oz.	R-410A 21.87 oz.	R-410A 20.81 oz.	R-410A 21.87 oz.	R-410A 21.52 oz.	R-410A 17.99 oz	R-410A 21.87 oz.	R-410A 21.52 oz.
Resistance heat BTU							10,600/8,600	10,600/8,600	10,600/8,600
Resistance heat Amp							15/13.5	15/13.5	15/13.5
Resistance heat Watts							3,450/2,821	3,450/2,821	3,450/2,821
Fan speeds	3	3	3	3	3	3	3	3	3
Air flow volume (CFM)									
High	252	269	286	275	277	295	292	286	282
Med	217	234	258	240	258	275	275	264	263
Low	189	203	235	209	235	252	252	240	244
Compressor type	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Plug capacity (15A circuit size)	125V/120V/15A	125V/120V/15A	125V/120V/15A	240V/250V/15A	240V/250V/15A	240V/250V/15A	240V/20A	240V/20A	240V/20A
Line cord plug/configuration	A / 5-15P	A / 5-15P	A / 5-15P	B / 6-15P	B / 6-15P	B / 6-15P	6-20P	6-20P	6-20P
On/Off timer (24 hour)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy saver (Eco Mode)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Auto Fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidify function	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sleep mode	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Wall sleeve (sold separately)—RAB24, RAB26*, RAB46*, RAB48*	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included
Dimensions & installation	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall
Wall case required	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
WEIGHTS & DIMENSIONS									
Width (in.)	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19
Height (in.)	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17
Depth (in.)	19	19	19	19	19	19	19	19	19
Net weight (lbs.)	66	69	77	69	76	77	69	79	80
Approx. shipping weight (lbs.)	77	81	88	81	87	89	80	90	91

\*Must use provided trim kit.

BUILT-IN “J” SERIES—HEAT/COOL

	GE				HIGH-MOUNT AJEM12DCH
	STANDARD INSTALLATION AJEQ08ACH	AJEQ10DCH	AJEQ12DCH	AJEQ14DCH	
ADA compliant	Yes	Yes	Yes	Yes	Yes
Voltage/hertz/phase	115/60/1	230/208/60/1	230/208/60/1	230/208/60/1	230/208/60/1
COOLING CAPACITY					
BTUH—AHAM cooling	8,300	10,000/9,800	12,000/11,700	14,000/13,600	12,000/11,700
Amps—AHAM	7.8	4.6/5.0	5.5/5.9	6.9/7.5	5.5/5.9
Watts	840	1,020/1,000	1,240/1,210	1,480/1,410	1,240/1,210
EER	10	9.8/9.8	9.5/9.5	9.3/9.5	9.5/9.5
CEER	9.6	9.6/9.6	9.5/9.5	9.3/9.5	9.5/9.5
Dehumidification (pints/hr.)	1.9	2.7/2.7	3.4/3.4	3.4/3.4	3.9/3.9
BTU heating	4,200	10,600/8,600	10,600/8,600	10,600/8,600	10,600/8,600
Heating Amps	11	15.1/14	15/13.5	15/13.5	15/13.5
Heating Watts	1,250	3,470/2,850	3,450/2,821	3,450/2,821	3,450/2,821
FEATURES					
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A
Electronic control	Yes	Yes	Yes	Yes	Yes
Remote control	Yes	Yes	Yes	Yes	Yes
24VAC wall thermostat capable (RAK164D2, RAK164P2)—8 Pin Quick Disconnect	Yes	Yes	Yes	Yes	Yes
Line cord plug/configuration	Parallel/NEMA 5-15P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI
Fan speeds	3	3	3	3	3
Centered rear condenser coil —compatible with RAG13/ RAG13A/ RAG14E grille	Yes	Yes	Yes	Yes	Yes
WEIGHTS & DIMENSIONS					
Chassis width (in.)	26-1/16	26-1/16	26-1/16	26-1/16	26-1/16
Chassis height (in.)	15-21/32	15-21/32	15-21/32	15-21/32	15-21/32
Chassis depth (in.)	21-1/16	21-1/16	21-1/16	21-1/16	21-1/16
Approx. net weight (lbs.)	66	69	79	79	79
Approx. shipping weight (lbs.)	76	80	89	89	89

All 230/208V cooling units with electric heat models are corrosion treated. Design subject to change without notice. Specifications subject to change. For complete specifications visit [geappliances.com](#).

DEHUMIDIFIER

	GE
	APER50LZ
FEATURES	
ENERGY STAR® certified	Yes
R-410A refrigerant	Yes
Dehumidification (pints/day)	49.63
Dry airflow (CFM) (High/Med/Low)	200/165/147
Electronic controls	Yes
Auto shut-off	Yes
Automatic defrost	Yes
Water level indicator	Yes
Fan speeds	3
Upfront removable bucket	Yes
Bucket capacity (pints)	15.0
External drain capability	Yes
Washable air filter	Yes
Easy-roll casters (4)	Yes
Voltage	115
Watts	770
Amps	7.2
Circuit size (amps)	7.2
Plug type	1/5-15P
Temperature operating range	41°F-89°F
Overall dimensions (WxHxD in inches)	14.76 x 24.02 x 11.38
Shipping weight (lbs.)	48.5
Net weight (lbs.)	43.7
See written warranty for details.	

DEHUMIDIFIER WARRANTY

One-year limited product replacement warranty. See written warranty for details.



BUILT-IN “J” SERIES—COOL ONLY

	GE				
	STANDARD INSTALLATION				
	AJCQ06LCH	AJCQ08ACH	AJCQ10ACH	AJCQ12ACH	AJCQ10DCH
ENERGY STAR® certified	Yes	Yes	Yes	Yes	Yes
ADA compliant	Yes	Yes	Yes	Yes	Yes
Voltage/hertz/phase	115/60/1	115/60/1	115/60/1	115/60/1	230/208/60/1
COOLING CAPACITY					
BTU—AHAM cooling	6,300	8,400	10,000	12,000	10,150/9,900
Amps—AHAM	5.0	7.0	8.3	10.2	4.5/4.8
Watts	560	780	930	1,130	950/920
EER	11.1	10.6	10.6	10.5	10.6/10.6
CEER	11.0	10.6	10.6	10.5	10.6/10.6
Dehumidification (pints/hr.)	1.3	1.9	2.7	3.4	2.7/2.7
FEATURES					
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A
Circuit size (Amps.)	15	15	15	15	15
Line cord plug/configuration	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI
Electronic control	Yes	Yes	Yes	Yes	Yes
Filter reminder function	Yes	Yes	Yes	Yes	Yes
Filter type	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable
Remote	Yes	Yes	Yes	Yes	Yes
Fan speeds	3	3	3	3	3
WEIGHTS & DIMENSIONS					
Chassis WxHxD (in.)	26-1/16 x 15-21/32 x 21-1/16				
Approx. net weight (lbs.)	62	64	67	73	67
Approx. shipping weight (lbs.)	72	73	77	83	77

	GE					
	HIGH-MOUNT INSTALLATION					
	AJCQ12DCH	AJCQ14DCH	AJCM08ACH	AJCM10ACH	AJCM10DCH	AJCM12DCH
ENERGY STAR certified	Yes	Yes	Yes	Yes	Yes	Yes
ADA/UFAS compliant	Yes	Yes	Yes	Yes	Yes	Yes
Voltage/hertz/phase	230/208/60/1	230/208/60/1	115/60/1	115/60/1	230/208/60/1	230/208/60/1
COOLING CAPACITY						
BTU—AHAM cooling	12,000/11,700	14,000/13,600	8,400	10,000	10,150/9,900	12,000/11,700
Amps—AHAM	5.2/5.6	6.9/7.5	7	8.3	4.5/4.8	5.2/5.6
Watts	1,140/1,120	1,490/1,420	780	930	950/920	1,140/1,120
EER	10.5	9.3	10.6	10.6	10.6	10.5
CEER	10.5	9.3	10.6	10.6	10.6	10.5
Dehumidification (pints/hr.)	3.4/3.4		1.9	2.7	2.7/2.7	3.4/3.4
FEATURES						
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
Circuit size (Amps.)	15	15	15	15	15	15
Line cord plug/configuration	Tandem/NEMA 6-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI
Electronic control	Yes	Yes	Yes	Yes	Yes	Yes
Filter reminder function	Yes	Yes	Yes	Yes	Yes	Yes
Filter type	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable	Rigid, tilt out/washable
Remote	Yes	Yes	Yes	Yes	Yes	Yes
Fan speeds	3	3	3	3	3	3
WEIGHTS & DIMENSIONS						
Chassis WxHxD (in.)	26-1/16 x 15-21/32 x 21-1/16					
Approx. net weight (lbs.)	74	74	64	67	67	74
Approx. shipping weight (lbs.)	84	84	73	77	77	84

	GE	
	HEAT PUMP	
	AJHQ08ACH	AJHQ12DCH
ADA compliant	Yes	Yes
Voltage/hertz/phase	115/60/1	230-208/60/1
COOLING CAPACITY		
BTUH cooling	8,200	11,800/11,600
Amps	7.4	5.6/6.2
Watts	820	1,240/1,220
EER	10	9.6/9.6
CEER	9.8	9.6/9.6
Dehumidification (pints/hr.)	1.9	3.4/3.4
FEATURES		
Refrigerant type	R-410A	R-410A
Reverse cycle BTU heating	6,000/5,800	9,000/8,800
Reverse cycle Amps	5.4	4.1/4.5
Reverse cycle Watts	600	910/900
COP*	3.1	2.3
Resistance heat BTU	3,900	10,600/8,600
Resistance heat Amps (max)	11.0	15.0/13.5
Resistance heat Watts	1,250	3,450/2,821
24VAC wall thermostat capable requires 8 pin thermostat converter (sold separately)	Yes	Yes
Line cord plug/configuration	Parallel/Right Angle LCDI	Perpendicular/Right Angle LCDI
Fan speeds	3	3
WEIGHTS & DIMENSIONS		
Chassis WxHxD (in.)	26-1/16 x 15-21/32 x 21-1/16	
Approx. net weight (lbs.)	71	81
Approx. shipping weight (lbs.)	84	94


\*Coefficient of Performance



BUILT-IN ROOM AIR CONDITIONERS WALL OPENING FOR RAB46A/48B CASES

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.


**Note:** Units should be caulked on all four sides of case to the building exterior to assure building integrity.

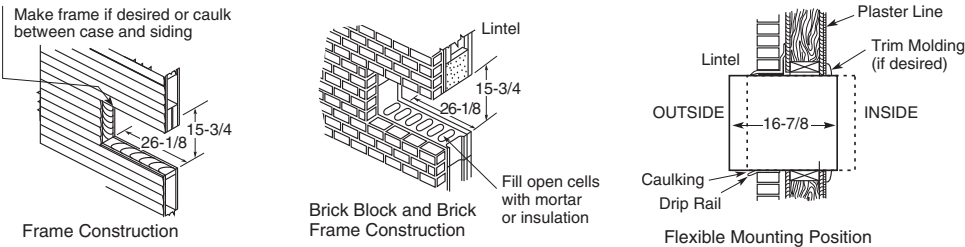

**WALL SLEEVE FOR TENANT OPTION INSTALLATION**

When the air conditioner is offered as a tenant option, this wall case provides protection against outside elements.


**RAB48B**—includes wall case, exterior grille, steel closure panel and a layer of insulation



**STANDARD WALL CASE RAB46A**

Solid-sided wall case fabricated of galvanized steel with baked-enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13A) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.

**RAB46B**—Quick Snap Flat Pack Wall Sleeve

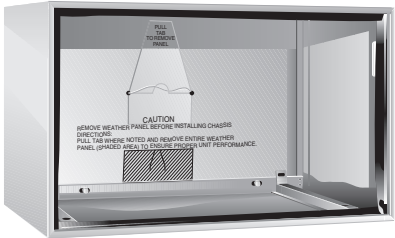


**WALL OUTLETS**

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

**Note:** Aluminum wiring may pose special problems—consult a qualified electrician.

**Note:** Some models may not be available in your area due to local legislation. Contact your local dealer.

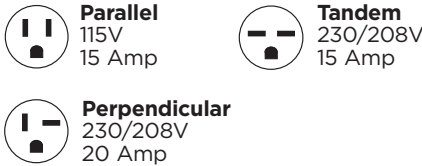


SINGLE PACKAGED VERTICAL UNIT AIR CONDITIONING\*

	GE					
	HEAT PUMPS					
	AZ91H09D2E AZ91H09D3E AZ91H09D5E	AZ91H12D2E AZ91H12D3E AZ91H12D5E	AZ91H18D2E AZ91H18D3E AZ91H18D5E	AZ91H09E2E AZ91H09E3E AZ91H09E5E	AZ91H12E2E AZ91H12E3E AZ91H12E5E	AZ91H18E2E AZ91H18E3E AZ91H18E5E
FEATURES						
BTUH	9,400/9,400	12,200/12,000	18,200/18,000	9,400	12,400	18,000
Voltage	230/208	230/208	230/208	265	265	265
EER (BTUH/watt)	11.0/11.0	11.0/11.0	11.0/11.0	11.0	11.0	11.0
Heater wattage designator (kW)	2.5 3.4 5.0	2.5 3.4 5.0	2.5 3.4 5.0	2.5 3.4 5.0	2.5 3.4 5.0	2.5 3.4 5.0
Heating cap (BTUH)	8,400/8,400	11,100/10,900	16,800/16,400	8,500	11,300	16,700
COP** @ 47°	3.3/3.3	3.3/3.3	3.3/3.3	3.3	3.3	3.3
Indoor CFM (hi/lo) (0.1 ESP)	450/420	450/420	465/420	450/420	450/420	465/420
CASE DIMENSIONS						
Height (in.)	32-1/4	32-1/4	48-1/4	32-1/4	32-1/4	48-1/4
Width (in.)	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8
Depth (in.)	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8
Net weight (lbs.)	114	125	168	114	124	168
Approx. shipping weight (lbs.)	125	136	220	125	135	220
*Preliminary—model specifications subject to change. **Coefficient of Performance						




OVERALL UNIT DIMENSIONS

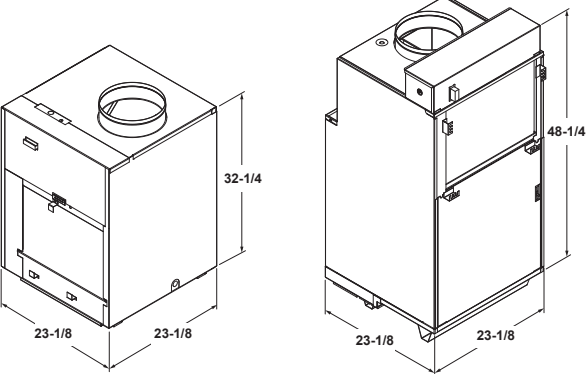

MODELS AZ91H09/12

MODEL AZ91H18

VERTICAL VIEW

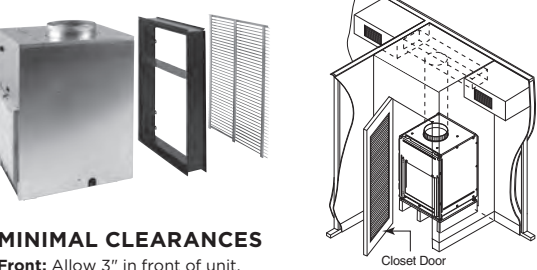

**MINIMAL CLEARANCES**

**Front:** Allow 3" in front of unit.

**Sides:** Allow 3" on each side of unit.

**Platform:** Field-supplied; refer to installation instructions.

**Side-access closets:** Not recommended for new installations.

**Overall unit dimensions:**  
AZ91H09/12: 32-1/4" H x 23-1/8" W x 23-1/8" D  
AZ91H18: 47-1/4" H x 23-1/8" W x 23-1/8" D

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

ZONELINE® PACKAGED TERMINAL AIR CONDITIONER SPECIFICATIONS

AZ45 SERIES COOLING WITH ELECTRIC HEAT

	230/208V Models			
	AZ45E07DAB	AZ45E09DAB	AZ45E12DAB	AZ45E15DAB
CAPACITY				
Cooling BTUH	7,200/7,000	9,700/9,600	11,600/11,500	14,600/14,500
EER (BTU/Watt)	13.4/13.4	12.1/12.1	11.7/11.8	10.5/10.5
Dehumidification (pints/hr.)	1.64	2.7	3.5	4.6
FEATURES				
Refrigerant type	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	350	390	420	435
CFM, indoor fan low	220	260	290	330
Vent CFM (full open)	33	38	38	47
POWER/RATINGS				
Power factor	96%	98%	98%	97%
Sensible heat ratio	72%	64%	62%	63%
Cooling Watts	535/520	800/790	960/900	1,415/1,405
Cooling Amperes, F.L.	2.5/2.6	3.6/3.9	4.7/5.0	6.4/6.8
Amperes, L.R.	13.5	21.0	29.5	31.5
WEIGHT (NET/SHIP)	90/100	103/113	106/116	106/116

AZ45 SERIES COOLING WITH ELECTRIC HEAT (Premium Guard Corrosion Protection)

	230/208V Models				265V Models			
	AZ45E07DAC	AZ45E09DAC	AZ45E12DAC	AZ45E15DAC	AZ45E07EAC	AZ45E09EAC	AZ45E12EAC	AZ45E15EAC
CAPACITY								
Cooling BTUH	7,200/7,000	9,400/9,300	11,600/11,500	14,600/14,500	7,100	9,500	11,500	14,800
EER (BTU/Watt)	13.4/13.4	11.8/11.8	11.7/11.8	10.5/10.5	13.2	11.6	11.7	10.5
Dehumidification (pints/hr.)	1.64	2.7	3.5	4.6	1.64	2.7	3.5	4.6
FEATURES								
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	350	390	420	435	350	393	393	435
CFM, indoor fan low	220	260	290	330	220	260	290	330
Vent CFM (full open)	33	38	38	47	33	38	38	47
POWER/RATINGS								
Power factor	96%	98%	98%	97%	95%	94%	97%	97%
Sensible heat ratio	72%	64%	62%	63%	72%	67%	62%	63%
Cooling Watts	535/520	795/790	985/955	1,390/1,380	540	815	990	1,400
Cooling Amperes, F.L.	2.5/2.6	3.5/3.9	4.4/4.7	6.3/6.7	2.2	3.3	4.0	5.5
Amperes, L.R.	13.5	21	29.5	31.5	11.7	16.5	23.5	29.0
WEIGHT (NET/SHIP)	90/100	103/113	106/116	106/116	95/105	103/113	106/116	107/117

AZ45 SERIES COOLING WITH ELECTRIC HEAT (Dry Air 25)

	230/208V Models			265V Models	
	AZ45E07DAP	AZ45E09DAP	AZ45E12DAP	AZ45E09EAP	AZ45E12EAP
CAPACITY					
Cooling BTUH	6,900/6,800	9,400/9,300	11,200/11,000	9,400	10,900
EER (BTU/Watt)	12.8/12.8	12.1/12.1	11.4/11.5	12.1	11.0
Dehumidification (pints/hr.)	2.4	3.4	4.2	3.5	4.2
FEATURES					
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	350	370	360	370	360
CFM, indoor fan low	220	260	270	260	270
Vent CFM (full open)	40	44	44	44	44
POWER/RATINGS					
Power factor	96%	97%	98%	93%	97%
Sensible heat ratio	59%	58%	54%	58%	54%
Cooling Watts	535/530	775/765	970/960	780	995
Cooling Amperes, F.L.	2.5/2.7	3.5/3.8	4.4/4.7	3.2	3.9
Heating Amperes	13.5	21.0	29.5	16.5	23.5
WEIGHT (NET/SHIP)	96/106	109/119	112/122	109/119	112/122

AZ65 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT

	230/208V Models			
	AZ65H07DAB	AZ65H09DAB	AZ65H12DAB	AZ65H15DAB
CAPACITY				
Cooling BTUH	7,100/6,900	9,700/9,600	11,900/11,800	14,400/14,200
EER (BTU/Watt)	13.0/13.0	12.2/12.2	11.7/11.9	10.6/10.6
Dehumidification Pts/Hr	1.7	2.6	3.7	4.8
FEATURES				
Refrigerant type	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	360	420	410	400
CFM, indoor fan low	205	300	300	290
Vent CFM (full open)	38	40	45	44
POWER/RATINGS				
Power factor	96%	98%	98%	97%
Sensible heat ratio	79%	68%	62%	60%
Cooling Watts	545/530	795/785	1,005/1,000	1,355/1,335
Cooling Amperes, F.L.	2.5/2.7	3.6/3.8	4.5/4.9	6.1/6.5
Amperes, L.R.	13.5	21.0	29.5	31.5
Reverse cycle heat BTUH	6,200/6,100	8,100/8,000	10,400/10,300	13,400/13,300
COP*	4.0/4.0	3.7/3.7	3.6/3.6	3.3/3.3
Heating Watts	450/440	645/630	850/840	1,190/1,180
Heating Amperes	2.1/2.2	3.0/3.2	3.8/4.0	5.2/5.6
WEIGHT (NET/SHIP)	98/108	104/114	104/114	107/117

\*Coefficient of Performance

ZONELINE PACKAGED TERMINAL AIR CONDITIONER SPECIFICATIONS

AZ65 (TYPICAL) SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT (Premium Guard Corrosion Protection)

	230/208V Models				265V Models			
	AZ65H07DAC	AZ65H09DAC	AZ65H12DAC	AZ65H15DAC	AZ65H07EAC	AZ65H09EAC	AZ65H12EAC	AZ65H15EAC
CAPACITY								
Cooling BTUH	7,100/7,000	9,600/9,500	11,900/11,800	14,400/14,200	7,100	9,500	11,900	14,700
EER (BTU/Watt)	13.0/13.0	12.2/12.2	11.7/11.7	10.4/10.4	13.2	11.7	11.6	10.5
Dehumidification (pints/hr.)	1.6	2.6	3.7	4.8	1.64	2.7	3.5	4.6
FEATURES								
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	360	420	410	400	350	393	393	435
CFM, indoor fan low	205	300	300	290	220	260	290	330
Vent CFM (full open)	38	40	45	44	33	38	38	47
POWER/RATINGS								
Power factor	96%	98%	98%	97%	95%	94%	97%	97%
Sensible heat ratio	73%	68%	62%	60%	72%	67%	62%	63%
Cooling Watts	545/535	795/785	1,015/1,005	1,390/1,360	540	815	990	1,400
Cooling Amperes, F.L.	2.5/2.7	3.6/3.9	4.5/4.9	6.2/6.7	2.2	3.3	4.0	5.5
Amperes, L.R.	13.5	21.0	29.5	31.5	11.7	16.5	23.5	29.0
Reverse cycle heat BTUH	6,200/6,100	8,100/8,000	10,300/10,200	13,200/13,000	6,200	8,100	10,300	13,500
COP*	4.0/4.0	3.7/3.7	3.6/3.6	3.2/3.2	3.9	3.6	3.6	3.2
Heating Watts	450/445	645/630	835/815	1,195/1,180	460	655	860	1,220
Heating Amperes	2.1/2.2	2.9/3.1	3.8/4.0	5.4/5.7	1.9	2.8	3.5	4.8
WEIGHT (NET/SHIP)	98/108	106/116	104/114	108/118	95/105	103/113	106/116	107/117

\*Coefficient of Performance

AZ65 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT (Internal Condensate Removal)

	230/208V Models				265V Models			
	AZ65H07DAD	AZ65H09DAD	AZ65H12DAD	AZ65H15DAD	AZ65H07EAD	AZ65H09EAD	AZ65H12EAD	AZ65H15EAD
CAPACITY								
Cooling BTUH	7,000/6,900	9,600/9,500	11,800/11,600	14,300/14,100	7,000	9,500	11,900	14,200
EER (BTU/Watt)	13.0/13.0	12.0/12.0	11.5/11.5	10.3/10.3	12.8	11.7	11.6	10.3
Dehumidification (pints/hr.)	1.6	2.6	3.7	4.8	1.5	2.5	3.7	4.8
FEATURES								
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	360	420	410	400	360	420	410	400
CFM, indoor fan low	205	300	300	290	205	300	300	290
Vent CFM (full open)	38.0	40.0	45.0	44.0	38	40	45	44
POWER/RATINGS								
Power factor	96%	98%	98%	97%	95%	94%	97%	97%
Sensible heat ratio	73%	68%	62%	60%	77%	68%	62%	60%
Cooling Watts	535/530	800/790	1,020/1,005	1,385/1,360	545	810	1,015	1,400
Cooling Amperes, F.L.	2.5/2.7	3.6/3.9	4.6/4.9	6.1/6.6	2.2	3.3	4.0	5.6
Amperes, L.R.	13.5	21.0	29.5	31.5	11.7	16.5	23.5	29.0
Reverse cycle heat BTUH	6,200/6,000	8,200/8,000	10,400/10,200	13,500/13,400	6,200	8,100	10,300	13,500
COP*	4.0/4.0	3.6/3.6	3.5/3.5	3.2/3.2	3.9	3.5	3.4	3.2
Heating Watts	450/435	665/650	870/850	1,235/1,225	460	670	885	1,235
Heating Amperes	2.1/2.2	3.0/3.2	3.8/4.1	5.3/5.6	1.9	2.8	3.5	4.9
WEIGHT (NET/SHIP)	100/110	108/118	106/116	110/120	100/110	106/116	106/116	111/121

\*Coefficient of Performance

AZ45 SERIES COOLING WITH ELECTRIC HEAT (Makeup Air)

	230/208V Models	
	AZ45E09DBM	AZ45E12DBM
CAPACITY		
Cooling BTUH	9,100/9,100	11,900/11,700
EER (BTU/Watt)	11.5/11.5	11.7/11.7
PTAC/PTHP dehum (pints/hr.)	2.4	3.9
FEATURES		
PTAC/PTHP refrigerant	R-410A	R-410A
CFM, indoor fan high	409	449
CFM, indoor fan low	280	270
Vent CFM (full open)	25-50	25-50
POWER/RATINGS		
Power factor	98%	98%
Sensible heat ratio	75%	66%
Cooling Watts	790/790	1,005/1,000
Total Cooling Amperes	5.1/5.2	5.7/6.0
Amperes, L.R.	21.0	29.5
WEIGHT (NET/SHIP)	122/132	123/133

AZ65 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT (Makeup Air)

	230/208V Models			265V Models		
	AZ65H07DBM	AZ65H09DBM	AZ65H12DBM	AZ65H07EBM	AZ65H09EBM	AZ65H12EBM
230/208V Models						
CAPACITY						
Cooling BTUH	7,000/7,000	9,200/9,100	11,500/11,400	6,900	9,200	11,800
EER (BTU/Watt)	12.5/12.5	11.3/11.3	11.2/11.2	12.5	11.5	11.4
PTAC/PTHP dehum (pints/hr.)	0.9	1.9	3.4	0.7	2	3.7
FEATURES						
PTAC/PTHP refrigerant	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	409	409	449	409	409	449
CFM, indoor fan low	250	300	300	350	370	350
Vent CFM (full open)	25-50	25-50	25-50	25-50	25-50	25-50
POWER/RATINGS						
Power factor	96%	97%	97%	93%	93%	96%
Sensible heat ratio	89%	80%	69%	88%	78%	69%
Cooling Watts	560/560	810/805	1,025/1,015	550	800	1,025
Total Cooling Amperes	3.7/3.9	4.9/5.2	5.8/6.2	3.2	4.2	4.9
Amperes, L.R.	13.5	21	29.5	11.7	16.5	23.5
Reverse cycle heat BTUH	6,200/6,100	8,000/7,900	10,200/10,000	6,000	8,100	10,300
COP*	4.0/4.0	3.3/3.3	3.5/3.5	3.9	3.6	3.5
Heating Watts	450/440	705/695	850/835	450	655	870
Total Heating Amperes	3.3/3.4	4.7/4.8	5.0/5.2	2.9	3.8	4.5
WEIGHT (NET/SHIP)	117/127	123/133	123/133	117/127	123/133	123/133

\*Coefficient of Performance

See page 226 for warranty information.





ZONELINE® SPECIFICATIONS—POWER CONNECTION KITS AND HEATER WATTAGE

Power connection kits are required on all Zoneline chassis. (See chart on page 333.)

The correct kit for the installation is determined by the voltage and amperage of the electrical circuit and the means of connecting the unit to the building wiring. If the unit is to be plugged in to a receptacle, a line cord kit would be used; if the unit is to be permanently connected, a permanent connection kit would be used. Cord set units of 265 volts must be installed in compliance with National Electrical Code.\*

POWER CONNECTION KITS

Required on all models. See specification sheet for heater KW and branch circuit ampacity.

LINE CORD CONNECTION KITS



230/208 Volt Line Cord Connection Kits RAK315P, RAK320P, RAK330P

265 Volt Permanent Connection Kits RAK515P, RAK520P, RAK530P. Short power cord without LCDI for sub-base use only.

DIRECT CONNECTION KITS



230/208 Volt Direct Connection Kits RAK315D, RAK320D, RAK330D

265 Volt Direct Connection Kits RAK515D, RAK520D, RAK530D

RECEPTACLES/SUB-BASES



TANDEM 230/208V 15 amp NEMA6-15R



265V 15 AMP NEMA7-15R; Receptacle used on 265V sub-base



RAK204D15C 15 amp sub-base 230/208 volt Includes power cord: RAK315SP



RAK204E15C 15 amp sub-base 265 volt Includes short power cord: RAK515P



PERPENDICULAR 230/208V 20 amp NEMA6-20R



265V 20 AMP NEMA7-20R; Receptacle used on 265V sub-base



RAK204D20C 20 amp sub-base 230/208 volt Includes power cord: RAK320SP



RAK204E20C 20 amp sub-base 265 volt Includes short power cord: RAK520P



LARGE TANDEM 230/208V 30 amp NEMA6-30R



265V 30 AMP NEMA7-30R; Receptacle used on 265V sub-base



RAK204D30C 30 amp sub-base 230/208 volt Includes power cord: RAK330SP



RAK204E30C 30 amp sub-base 265 volt Includes short power cord: RAK530P

ZONELINE INSTALLATION

Simple three-step installation

Zoneline units are designed for easy installation, off or flush with the floor. When the sleeve is installed, the chassis simply slides into place.

Compatibility with existing Zoneline wall sleeves and rear grilles simplifies retrofit installations. A new chassis simply slides into the already installed wall case; the existing rear grille may be used as is, or with a minor modification for greater operating efficiency.

The exclusive Quick Connect power supply kit with all models makes it easy to connect the new unit to power sources already in place.

- 1. **Frame the opening.** The RAB77B SMC wall sleeve requires an opening of 16-1/2" high x 42-3/8" wide, while the RAB71B, RAB81 or RAB81B wall sleeve requires an opening of 16-1/4" high x 42-1/4" wide. Position the sleeve, secure it to the studs and then caulk. Complete instructions are furnished with each unit.
- 2. **Connect the electrical supply.** Each Zoneline unit requires a 230/208V or 265V power supply. It is strongly recommended that electrical connections be made by a qualified electrician. All wiring, including installation of the receptacle, must be in accordance with local codes.
- 3. **Slide-in chassis.** With the wall sleeve, electrical receptacle and exterior grille in place, the separate chassis simply slides into position. Install the roomside cabinet, and plug into the electrical receptacle. You are now ready for many years of quiet comfort.

ELECTRICAL WIRING

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations.

**Note:** Aluminum wiring may pose special problems—consult a qualified electrician.

Cooling sizes

All units come in four nominal cooling sizes: 7,000, 9,000, 12,000 and 15,000 BTUH.

Resistance heat

Resistance heat or backup heat output is determined by power connection kits (15A, 20A or 30A).

Grille options

RAG60 (Stamped Aluminum)  
Molded Exterior Architectural Louvers:  
RAG61 (Beige), RAG62 (Maple) and RAG63 (Dark Brown)

Ducted applications


AZ45 and AZ65 Series can be used with ductwork to heat or cool more than one room. RAK6053 Duct Adapter is applied to top of case over air discharge. RAK601B Duct Extension is applied to right or left of adapter. Locally fabricated ductwork may be added to extend to maximum recommended distance of 15 feet. Remote thermostat recommended with ducted applications.

Electrical connection

230/208V units may be plugged into a receptacle. 265V units and special-application 230/208V units require direct connection. See Architects and Engineers Design Data Manual for electrical connection information, including use of sub-base for direct-connected units. Installation must comply with local electrical codes and regulations.

For the most current updates to features, specifications and installations or applications, visit our website at [www.zoneline.com](http://www.zoneline.com).

WALL SLEEVE DIMENSIONS



RAB71B insulated wall sleeve

Heavy-gauge galvanized steel, with insulation. A-42", B-13-3/4", C-16"

RAB77B wall sleeve

Molded SMC fiberglass-reinforced polyester compound. A-42-1/8", B-13-7/8", C-16-1/4"


RAB81 and RAB81B wall sleeve

Heavy-gauge galvanized steel, with insulation. A-42", B-13-3/4", C-16"


Wall opening dimensions

Add 1/4" to A and C dimensions for all cut-out sizes. RAB71B—16-1/4" min. H x 42-1/4" min. W RAB81—16-1/4" min. H x 42-1/4" min. W RAB81B—16-1/4" min. H x 42-1/4" min. W RAB77B—16-1/2" min. H x 42-3/8" min. W

Extended sleeves also available.

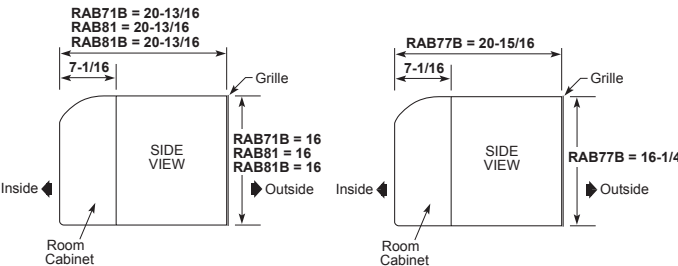

MAXIMUM CORD EXTENSION (IN INCHES)



ZONELINE SPECIFICATIONS—HEATER WATTAGE

	230/208-VOLT	LINE-CORD CONNECTED (P) AND DIRECT-CONNECTED UNITS (D)				
BTUH SIZE		7,000/9,000		12,000/15,000		
Power connection kit	RAK315P & RAK315D	RAK320P & RAK320D	RAK330P & RAK330D	RAK315P & RAK315D	RAK320P & RAK320D	RAK330P & RAK330D
Total Watts	2,410/1,990	3,420/2,830	4,830/3,990*	2,430/2,020	3,450/2,860	4,860/4,020*
Heater Watts	2,400/1,960	3,400/2,780	4,800/3,930*	2,400/1,960	3,400/2,780	4,800/3,930*
Heater BTUh	8,100/6,600	11,600/9,400	16,300/13,400*	8,100/6,600	11,600/9,400	16,300/13,400*
Total Amps	10.5/9.6	14.9/13.6	21.0/19.2	10.6/9.7	15.1/13.8	21.2/19.3
Min. circuit (MCA)	15	20	25	15	20	25
Recommended protective device (MOCP)	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker

	265-VOLT	PERMANENT (CORD SET) AND DIRECT-CONNECTED UNITS (D)				
BTUH SIZE		7,000/9,000		12,000/15,000		
Power connection kit	RAK515P & RAK515D	RAK520P & RAK520D	RAK530P & RAK530D	RAK515P & RAK515D	RAK520P & RAK520D	RAK530P & RAK530D
Total Watts	2,440	3,450	4,850*	2,460	3,470	4,870*
Heater Watts	2,400	3,400	4,800*	2,400	3,400	4,800*
Heater BTUh	8,100	11,600	16,300*	8,100	11,600	16,300*
Total Amps	9.1	12.9	18.1	9.3	13.1	18.4
Min. circuit (MCA)	15	20	25	15	20	25
Recommended protective device (MOCP)	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	25 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	25 amp time-delay fuse or breaker

Each line cord kit has an integral Leakage Current Detection and Interruption (LCDI) device as required by National Electrical Code (NEC) and Underwriters Laboratories (UL) for units manufactured after August 1, 2004. Wall case and exterior grille are also required for new construction. \*30 amp heater wattage will be reduced in low fan operation.

READING NOMENCLATURES

FRENCH-DOOR REFRIGERATOR

P		F		E		2		8		P		S		K		S		S			
<b>Brand</b> G=GE P=GE Profile™		<b>ENERGY</b> E=ENERGY STAR® S=standard D=door in door						<b>Feature pack</b>		<b>Finish</b> G=High-gloss M=Slate S=Stainless E=Black Slate B=Black Stainless Y=Fingerprint Resistant Stainless				<b>Color</b> BB = Black CC = Bisque DS = Black Slate ES = Slate FS = Fingerprint Resistant Stainless SA = Silver SS = Stainless TS = Black Stainless WW = White							
<b>Configuration/Depth</b> F=standard depth N=standard depth, non-dispenser V=multi-door				W=counter depth, non-dispenser Y=counter depth				<b>Capacity</b>		<b>Model year</b>											

BOTTOM-FREEZER REFRIGERATOR

G		D		E		2		5		E		S		K		S		S	
Brand G=GE						Capacity cubic feet				Feature Pack		Finish G=High-gloss M=Slate S=Stainless				Color BB = Black CC = Bisque DS = Black Slate ES = Slate FS = Fingerprint Resistant Stainless SA = Silver SS = Stainless TS = Black Stainless WW = White			
		Energy E=ENERGY STAR S=standard												Model year					
Configuration/Depth B=bottom-freezer, no icemaker D=bottom-freezer with icemaker																			

SIDE-BY-SIDE REFRIGERATOR

G		S		E		2		5		H		S		H		S		S	
<b>Brand</b> G=GE P=GE Profile						<b>Capacity</b> cubic feet				<b>Feature Pack</b>				<b>Finish</b> G=High-gloss M=Slate S=Stainless B=Black Stainless Y=Fingerprint Resistant Stainless				<b>Color</b> BB = Black CC = Bisque DS = Black Slate ES = Slate FS = Fingerprint Resistant Stainless SA = Silver SS = Stainless TS = Black Stainless WW = White	
				<b>Energy</b> E=ENERGY STAR S=standard															

TOP-FREEZER REFRIGERATOR

G		T		E		1		5		C		T		H		R		W		W			
<b>Brand</b> G=GE		<b>Energy</b> E=ENERGY STAR S=standard				<b>Capacity</b> cubic feet								<b>Model year</b>		<b>Color</b> BB = Black CC = Bisque DS = Black Slate ES = Slate FS = Fingerprint Resistant Stainless SA = Silver SS = Stainless TS = Black Stainless WW = White							
<b>Configuration</b> T=top-freezer with handle, no icemaker I=top-freezer with handle and icemaker P=top-freezer with pocket handle, no icemaker																							
<b>Feature pack</b> C = wire shelves, pocket handle, texture door D = wire shelves, handle texture door G = glass shelves, texture door H = glass shelves, smooth door J = premium door shelves, texture door K = Garage Ready, smooth door														<b>Door swing</b> R=right L=left									

COMPACT REFRIGERATOR, WINE & BEVERAGE (2014 AND BEYOND)

G		M		E		0		3		G		L		K		L		B	
<b>Brand</b> G=GE P=GE Profile				E=ENERGY STAR R=recessed handle S=full-size handle						<b>Shelving</b> A=wire shelves B=beverage shelves G=glass shelves H=wine shelves W=deluxe wine shelves				<b>Model year</b>					
<b>Type</b> C=built-in capable D=double door F=all refrigerator M>manual defrost V=wine & bev center W=wine center						<b>Capacity</b> cubic feet						<b>Finish</b> G=GE Gloss L=CleanSteel M=Slate S=Stainless				<b>Color</b> WW=White on White BB=Black on Black LB=CleanSteel ext./ Black handle SS=Stainless ext./SS handle SB=Stainless ext./ Black handle ED=Slate appearance/ Dorian Gray handle			

FREEZER

F	U	F	2	1	D	L	R	W	W
GE freezer	Defrost		Capacity		Model year		Door swing		Color
Configuration	M=manual		cubic feet				R=right		WW=White
U=upright	F=frost-free				Series		L=left		CD=Camouflage
C=chest					D=deluxe				Wilderness
					P=ENERGY STAR				Pattern
					S=standard				

ICE MAKER

U		N		C		1		5		N		J		I		I	
Configuration		U=universal		C=panel-ready		Size (width)		Inches		N=no shelf		Model		year		Product color	
Ice		N=nugget ice		C=clear ice													

WALL OVEN

P T S 7 0 0 0 B N T S									
Brand P=GE Profile J=GE	Series	Feature pack	Door Style O=Drop down L=Left hand swing R=Right hand swing	Base Color D=Color match S=Stainless B=Black Stainless E=Slate F=Black Slate	Model year	Finish SS=Stainless TS=Black Stainless ES=Slate DS=Black Slate BB=Black WW=White			
						Cavity Configuration S=single D=double			

WARMING DRAWER

P T W 9 0 0 0 S N S S									
Brand P=Profile	Width T=30" K=27"	Configuration W=Warming Drawer	Series	Base Color S=Stainless	Model year	Product Color SS=Stainless			

KITCHEN HUB

U V H 1 3 0 1 2 M S S									
Brand U=Universal	H=Hub	Series 1-9 Series	Width 30=30"	Differentiating Character	Model year	Finish SS=Stainless TS=Black Stainless DS=Black Slate			
						Base Color 2=Stainless 3=Black Slate, Black Stainless			

ADVANTIUM® (2008 and beyond)

P S B 9 2 0 1 S F S S									
Brand P=GE Profile	Configuration A=above-the- cooktop B=built-in wall oven	Feature pack Designates features— the higher the number, the more features.	Model year	Product color SS=Stainless ES=Slate TS=Black Stainless					
					GE Speedcook technology				

MICROWAVE OVEN

P V M 9 2 1 5 S K S S									
Brand P=GE Profile J=GE	Installation B=built-in capability M=mounts under cabinet/built-in capability L=mountable under the cabinet S=countertop only	Feature pack Designates features— the higher the number, the more features.	Capacity XX=cubic feet	Series	Model year	Color WW=White on White BB=Black on Black CC=Bisque on Bisque SS=Stainless ES=Slate TS=Black Stainless DS=Black Slate FS=Fingerprint Resistant Stainless			
						Type E=countertop V=externally vented, over-the-range N=non-vented, over-the-range W=microwave wall oven			

COOKTOP

P G P 9 0 3 6 S L S S									
Brand P=GE Profile J=GE	P=Cooktop		Feature pack	Width 30=30" 36=36"	Model year	Product color SS=Stainless TS=Black Stainless BB=Black WW=White			
	Series					Configuration G=gas H=Induction Omit this character for electric cooktop models.		Finish S=Stainless B=Black stainless D=Color-matched	

RANGE

P G B 9 4 0 S E J S S									
Brand P=GE Profile J=GE	Fuel G=gas H=induction 2=dual-fuel Electric=omit this character	Feature pack Designates features— the higher the number, the more features.	Oven type S=standard/steam clean 0-9=extended feature pack on select self-clean models	Model year	Product color SS=Stainless ES=Slate SA=Silver WW=White on White or True White CC=Bisque on Bisque or True Bisque BB=Black on Black TS=Black Stainless DS=Black Slate FS=Fingerprint Resistant Stainless		Ignition system (gas models) E=electronic pilotless ignition		
					Model/Door color B=Black Stainless D=Color-matched E=Slate F= Black Slate R=Stainless with Black S=Stainless with Gray Y=Fingerprint Resistant Stainless		Configuration A=24" free-standing B=30" free-standing D=30" drop-in M=27" drop-in S=slide-in X=accessory		

VENTILATION

U V W 9 3 6 1 S L S S									
Brand P=GE Profile J=GE U=Universal	1-9=Series	Width 30-30" 36-36" 42-42" 48-48"	Finish S=Stainless B=Black Stainless E=Slate F=Black Slate D=Color- matched	Model year	Product Color SS=Stainless TS=Black Stainless ES=Slate DS=Black Slate WW=White CC=Bisque				
					V=Vented N=Non vented				

DISHWASHER—STAINLESS STEEL, HYBRID STAINLESS STEEL AND PLASTIC INTERIOR

P D T 7 8 5 S Y N F S									
Brand G=GE P=GE Profile	Controls T=top control F=front control P=Pocket	Feature pack	Interior material H=hybrid stainless steel P=plastic S=stainless steel	Exterior finish S=Stainless G=Gloss M=Metallic Y=Fingerprint Resistant Stainless B=Black Stainless D=Color Matched E=Slate F=Black Slate	Exterior color BB=Black on Black CC=Bisque on Bisque DS=Black Slate ES=Slate FS=Fingerprint Resistant Stainless SA=Silver SS=Stainless TS=Black Stainless WW=White on White	Model year	Wash system 1=18" ADA 2=24" ADA 5=500 series 6=600 series 7=700 series		
							D=built-in dishwasher P=portable		

DISHWASHER—GE STANDARD TUB

G S D		4 0 6 0		K	S S	
<b>Brand</b> GSD=GE standard tub GSM=GE Spacemaker® GSC=GE convertible HDA=Hotpoint standard tub		<b>Handle/Control location</b> 0=latch/front control 1=power cord			<b>Exterior color</b> SS=Stainless WW=White on White BB=Black on Black CC=Bisque on Bisque SA=Silver	
		<b>Feature pack</b>	<b>Model year</b>			

DISPOSER

G		F		C		7		2		0		V	
Brand G=GE		FB=batch feed FC=continuous feed						Model				Model year	

WASHER

G T W 8 4 0 C S N W S									
Brand G=GE	Platform W=washer	Series	Year	Color WW=White WS=White with Silver backsplash DG=Diamond Gray RS=Sapphire Blue SN=Satin Nickel					
				Configuration T=top load (rear controls) U=unitized F=front load N= top load (front controls)					

DRYER

G T D 8 4 E C S N W S									
Brand G=GE	Platform D=vented dryer X=shallow depth V=long vent T=ventless condenser	Series	Fuel E=electric G=gas	Year	Color WW=White WS=White with Silver backsplash DG=Diamond Gray RS=Sapphire Blue SN=Satin Nickel				
					Configuration T=top load U=unitized F=front load				

SELECT FRONT LOAD WASHER

G F W N 1 6 0 0 J W W									
Brand G=GE	Product W=washer	Series	Color O=white	Year	Color WW=White				
					Configuration F=front load				

SELECT FRONT LOAD DRYER

G F D N 1 6 0 E J W W									
Brand G=GE	Product D=dryer	Series	Color O=white	Fuel E=electric G=gas	Year	Color WW=White			
						Configuration F=front load			

WATER SOFTENING SYSTEM

G X S H 4 5 V									
Brand G=GE	Packaging N=standard X=retail	Product type MH=Mixed media, super high-flow SH=super high-flow SF=high-flow	Capacity 45=45,100 grains 40=40,000 grains 31=31,100 grains 30=30,400 grains	Model year					


FLEXIBLE CAPACITY ELECTRONIC WATER HEATER

G E 5 0 S 1 0 B M M						
Brand G=GE	Fuel Type E=electric	Capacity 30=30 gallons 40=40 gallons 50=50 gallons	Size S=short	Warranty 10=10 years	Special Indicator B=US Standard Model (Contract)	Special Indicator M=Electronic controls with integrated mixing valve and WiFi
						Model Year M=2018




READING NOMENCLATURES (continued)


ELECTRONIC/ELECTRIC WATER HEATER

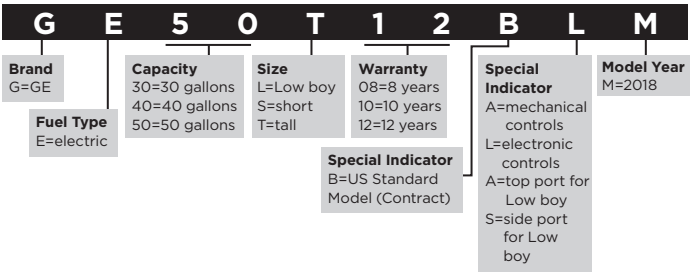


REVERSE-OSMOSIS SYSTEM

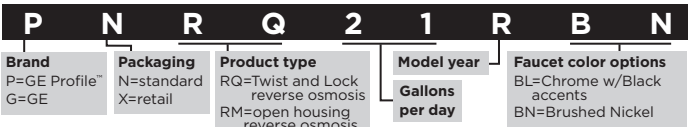


UNDER-THE-COUNTER FILTRATION SYSTEM

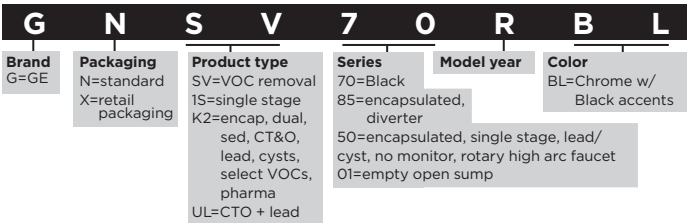


INLINE UNIT

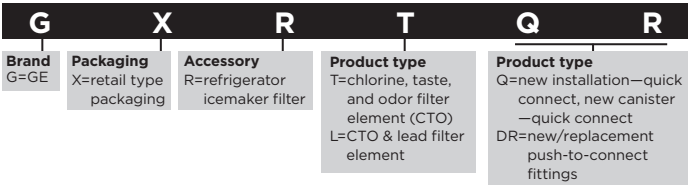


WHOLE-HOME FILTRATION SYSTEM

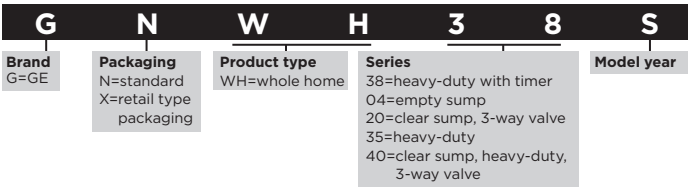


WINDOW AIR CONDITIONER

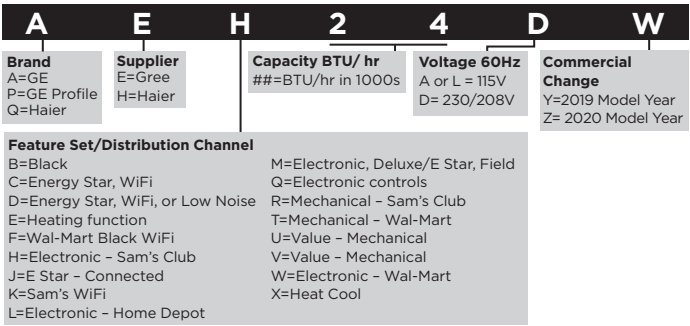


PORTABLE AIR CONDITIONER

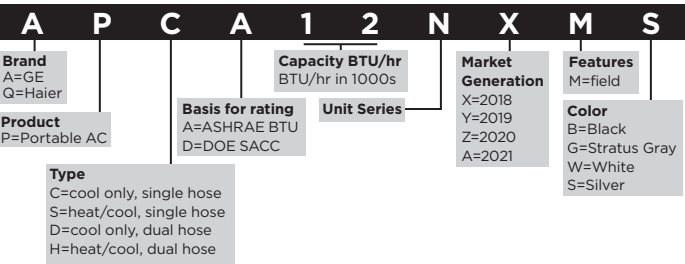


DEHUMIDIFIER

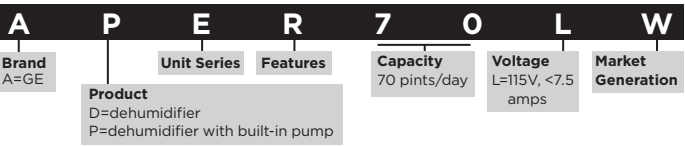


BUILT-IN/THROUGH-THE-WALL AIR CONDITIONER

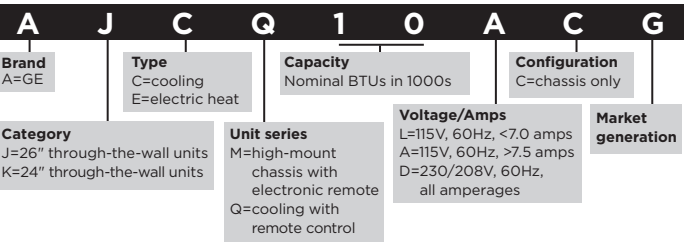

ZONELINE® CHASSIS

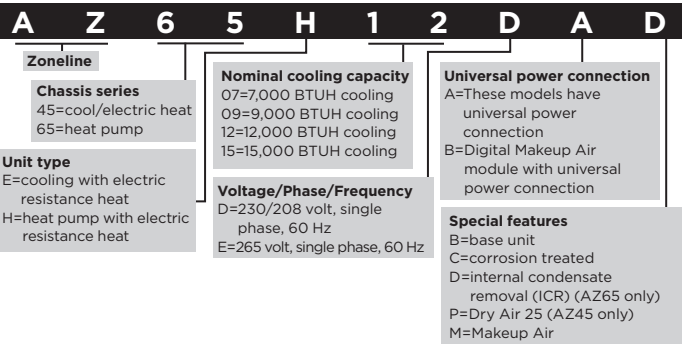

ZONELINE VERTICAL UNIT

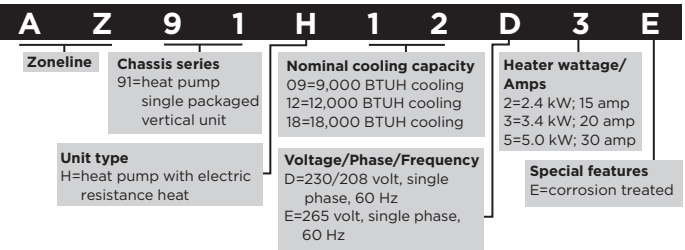

PARTS AND ACCESSORIES

REFRIGERATION	PART NUMBER
Keurig® K-Cup® Brewing System	WR02X30247
Keurig Brew Cup - 3 Pack	MyBrewCup3PK
8' Universal Braided Pex Water Line	PM08X10008
8' Universal Pex Water Line	WX08X10006
GE® Icemaker Kit	IM6D
GE Optional Bottom Freezer Icemaker Kit	IM5D
Cerama Bryte® Stainless Steel Cleaner & Polisher	PM10X311
Cerama Bryte Stainless Steel Microfiber Cleaning Cloths	WX10X307
Cerama Bryte Stainless Steel Wipes	WX10X10004
Cerama Bryte Refrigerator Cleaner	WX10X10206
Ice Cube Tray	WR30X311
Shabbos Keeper	SHABBOSKEEPER
Appliance Brush Set	PM14X10056
COOKING	
30" Never-Scrub Heavy-Duty Roller Rack Accessory	UXWORXR30
27" Never-Scrub Heavy-Duty Roller Rack Accessory	UXWORXR27
Cooktop Trim Kit	JXTR32B
GE Filler Trim Kit	JXTR32W
Optional Electrical Installation Accessory Kit	JXCK89
Flush Mount Kit	JXFLUSH1
Precision Cooking Probe with Bluetooth Dongle and Instruction Manual	JXSOU5V1
Probe Accessory	JXPROBE1
Hestan Cue 11" Smart Pan	WB32X32079
Universal 3-Wire 4' Electrical Range Cord Set	WX09X10006
Universal 4-Wire 4' Electrical Range Cord Set	WX09X10035
Cerama Bryte Complete Cooktop Kit	WX10X10020
Cerama Bryte Burnt-On Grease Remover	WX10X320
Cerama Bryte Cooktop Scraper & Pad	PM10X304
Universal Broiler Pan/Rack Set	WB48X10056
GE Electric Range Drip Bowls Satin Chrome (4 Pack)	GE68CC
GE Electric Range Drip Bowls Black Porcelain (4 pack)	GE68PCS
3 Self-Clean Oven Racks (Electric/Gas)	JXRACK3E/G
Center Grate	WB31X27150 same as JXGRATE1
Optional 30" Cast-Iron Griddle	WB31X29448 same as JXGRIDL230
Optional 36" Cast-Iron Griddle	WB31X29396 same as JXGRIDL236
Stainless Steel-Clad Aluminum Griddle	JXGRIDL1
Aluminum Griddle	WB31X24738
Reversible Grill/Griddle	WB31X24998 same as JXGRILL1
Cerama Bryte Cooktop Cleaner	WX10X300
Chantal® 9 Piece Cookware Set	WB02X30447
Chantal® 8" Non-Stick Frypan	WB32X32287
Chantal® 10" Non-Stick Frypan	WB32X32288
4' Universal Gas Range Connection with Auto Shutoff Kit	PM15X113
4' Universal Gas Range Installation Kit	PM15X103
Free-Standing 5 Burner Passover Kit	WB49XGR05F
Free-Standing 4 Burner Passover Kit	WB49XGR04F
Slide-In 5 Burner Passover Kit	WB49XGR05S
Roasting Rack for WB48X10056	WB48X5108
30" GE & HOTPOINT Free-Standing Range Sensi-Temp Coil Kit 3-6"+1-8"	WB30X32133
30" GE & HOTPOINT Free-Standing Range Sensi-Temp Coil Kit 2-6"+2-8"	WB30X32134
6" Sensi-Temp Coil	WB30X31058
8" Sensi-Temp Coil	WB30X31057
Cerama Bryte Gas Grate Cleaning Kit	WX10X10021
Cerama Bryte Cleaning Pads	WX10X350
Cerama Bryte Stainless Steel Microfiber Cleaning Cloths	WX10X307
Cerama Bryte Stainless Steel Cleaner & Polisher	PM10X311
Citrushine™ Stainless Steel Spray	WX10X10009
Cerama Bryte Stainless Steel Wipes	WX10X10004
Cerama Bryte Appliance Cleaner (use on matte finishes)	WX10X392
Cerama Bryte Granite Cleaner	WX10X310
Cerama Bryte Touchups Spray	WX10X391
Never-Scrub Roller Rack (Gas Ranges)	WB48X21543
Never-Scrub Roller Rack (Electric Ranges)	WB48X20881 or WB48X20862
Never-Scrub Roller Rack (Dual Fuel Ranges)	WB48X20990

GE Cooktop Filler Trim Kit	JXTR32W
Slide-In Range Filler Kit	JXFILLR1
VENTILATION	
30" telescopic hood trim accessory	UXB630BPTS
36" telescopic hood trim accessory	UXB636BPTS
GE Optional Damper Accessory	JXDA22
Electric Range Accessory—Chimney Extension Kit	UXCH
GE Range Hood Cord Kit	JXHC1
Automatic Make-up Air Damper for 6" duct	JXMUA6
Automatic Make-up Air Damper for 8" duct	JXMUA8
10-Ft. Ceiling Duct Cover Kit	JXDC72
Range Hood 10-Ft. Duct Cover Kit	UXDC53/UXDC72**
Range Hood Charcoal Filter—2-Pack	WB02X24842 same as JXC72
Range Hood Remote Control	WB02X24870 same as UXRC70
15" Cabinet Spacer for 30"/36" Hoods	JXS50SS, JXS56SS
Charcoal Filter	UXCF91
Grease Filters	WB02X10757 WB02X11478 WB02X10171 WB02X24873
Range Hood Recirculation Kit	UXN70
10-Ft. Ceiling Stainless Duct Cover Kit	UX10DC8**
12-Ft. Ceiling Duct Cover Kit	UX12DC9**
14-Ft. Ceiling Duct Cover Kit	UX14DC9**
30" Hood Liner	UXHL30
36" Hood Liner	UXHL36
Charcoal Replacement Filter	JXCF30
Range Hood Remote Control	UXRC70/WB02X24870
Duct Reducer	UXDT86
ADVANTUM®/MICROWAVE OVENS	
36" Over-the-Range Microwave Accessory Filler Kit	JX36B
Cerama Bryte Appliance Cleaner	WX10X392
Cerama Bryte Stainless Steel Cleaner & Polisher	PM10X311
Cerama Bryte Stainless Steel Wipes	WX10X10004
Cerama Bryte Stainless Steel Microfiber Cleaning Cloths	WX10X307
Advantium Wall Oven Storage Drawer	UXB903SNS5
15" Cabinetry Bump Out Kit	JX15BUMP
DISHWASHERS	
Dishwasher Third Rack Accessory Kit	GPFP3RACK
Dishwasher Tray	WX7X5
6' Universal Dishwasher Installation Kit	PM28X329
6' Universal Dishwasher Connector Kit with Adapter	WX28X326
12' Universal Dishwasher Connector Kit with Adapter	WX28X327
Universal 7'9" 3-Prong Power Cord for Built-In Dishwashers	WX09X70911
Universal 5'4" 3-Prong Power Cord for Built-In Dishwashers	WX09X70910
10' Small Port Drain Hose/10' Universal Connector Kit	WX28X320
10' Small Port Drain Hose/10' Universal Connector Kit	WX28X321
12' Dishwasher Drain Hose Extension	WD24X10065
White Upper Dishwasher Rack Roller Kit 4-pack	WD35X20994
White Upper Dishwasher Rack Roller Kit 4-pack	WD35X21035
White Lower Dishwasher Rack Roller Kit 8-pack	WD35X21038
Gray Upper Dishwasher Rack Roller Kit 4-pack	WD35X21036
Gray Upper Dishwasher Rack Roller Kit 4-pack	WD35X21039
Gray Lower Dishwasher Rack Roller Kit 8-pack	WD35X21041
Dishwasher Garden Hose Elbow	WX28X329
Finish® Jet-Dry® Rinse Aid	WX10X10210
Finish Detergent Booster	WX10X10022
Finish Dishwasher Cleaner	WX10X10209
COMPACTORS/DISPOSERS	
Universal Compactor Bags 15-count	WX60X1
Heavy-duty Compactor Bags 12-count	WC60X5017
Cerama Bryte Disposal Cleaner	WX10X311
Splash Guard	WC03X10010
Stopper	WC11X10003
Universal Disposer Power Cord Kit	WC12X10002
3-Bolt-Mount Adapter Kit	PM3X214
Door Toe Kick	WC17X10019 WC17X20082
Adjustable Door Kick Panel	WC17X10011

PARTS AND ACCESSORIES

CLOTHES CARE	
Universal 6' Stainless Steel Washer Hose with 90° Elbow, 2-Pack	WX14X10011
Universal 4' Polymer Coated Washer Hose, 2-Pack	WX14X10005
Universal 4' Rubber Washer Hose, 2-Pack	WH41X10207
GE Appliances' Exclusive Universal Flexible Metal Transition Dryer Duct (installer version)	WX08X10086
Universal Steam Dryer Kit	PM14X10012
Universal Flexible Dryer Duct	PM8X73
Universal 4' Gas Dryer Connection Kit w/Auto Shut Off	PM15X114
Universal 5' Gas Dryer Connection Kit w/Auto Shut Off	PM15X118
Universal 4-Wire 4' 30-AMP	WX09X10018
Universal 4-Wire 5' 30-AMP	WX09X10019
Universal 4-Wire 6' 30-AMP Electrical Dryer Cord	WX09X10020
Universal 3-Wire 4' 30-AMP	WX09X10002
Universal 3-Wire 5' 30-AMP	WX09X10003
Universal 3-Wire 6' 30-AMP	WX09X10004
Universal Low-Profile Washer Floor Tray	PM7X2 (White)
Universal Anti-Vibration Pads	PM7X3 (Gray)
Cerama Bryte Washer Cleaner	WX10X312
Universal Wool Dryer Balls - 3PK	WX02X30937
	WE1M1038
	WE01X20677
	WE01X22274
Dryer Racks	
Universal Side Vent Dryer Kit**	WE16X229317
Wall Mount Kit	WE49X22415
Universal Dryer Steam Kit with Brass "Y"	WE16X229317
Gas Dryer LP Conversion Kit 24"	WE25M73
	WE25X217
	WE250474
Gas Dryer LP Conversion Kit 27"	
Washing Machine Drain Hose Extension Kit	WH49X301
Washing Machine Drain Hose Extension Kit	WH49X315
Washing Machine Drain Hose Extension Kit	WH49X316
Washing Machine Drain Hose Extension Kit	WH49X317
Dryer Natural Gas to LP Converter Kit	WE25X10032
GE Stack Rack	DSDR24F
	WE25X10028 same as GFA28KITN
GE Washer/Dryer Stack Bracket Kit	
Wall-Mount Kit	WE49X22415
	WE25X10031 same as GE24STACK
GE Washer/Dryer 24" Stack Bracket Kit	
GE Washer/Dryer 24" Stack Bracket Kit	GFA24KITL
7" Rightheight Riser	GFR0728
WATER SYSTEMS	
Aluminum Anode Rod (GE30S08BAM; GE30S10BLM; GE30/40L08BAM)	GEKAA24
Aluminum Anode Rod (GE30T08BAM; GE30T10BLM; GE40S08/10BAM; GE40/50S10BLM; GE50S08/10BAM)	GEKAA39
Aluminum Anode Rod (GE40T08/10BAM; GE40/50T10BLM; GE50T08/10BAM)	GEKAA50
Pitched Roof Mounting Rails (GT25C10BAM)	GT25CKR
Hardware for GT25CKR	GT25CKHL
Pitched Roof Mounting Rails (GT50/GT40C10BAM)	GT50CKR
Hardware for GT50CKR	GT50CKHL
Pitched Roof Mounting Kit	GT00CKM01
30° angle, Flat Roof Mounting Kit (GT25C10BAM)	GT25CKM30
45° angle, Flat Roof Mounting Kit (GT25C10BAM)	GT25CKM45
30° angle, Flat Roof Mounting Kit (GT40C10BAM)	GT40CKM30
45° angle, Flat Roof Mounting Kit (GT40C10BAM)	GT40CKM45
30° angle, Flat Roof Mounting Kit (GT50C10BAM)	GT50CKM30
45° angle, Flat Roof Mounting Kit (GT50C10BAM)	GT50CKM45
Temperature Sensor Sleeve	GT00CKSL
Protective Cover (GT25C10BAM)	GT25CKC
Protective Cover (GT40C10BAM)	GT40CKC
Protective Cover (GT50C10BAM)	GT50CKC
Filtered Water Faucet	UNFCTFBL
Replacement O-Rings with Lubricant	UCRING
Universal Carbon Filter Wrench	UCWRNCH
Replacement O-Ring with Lubricant	HHRING
Universal Sump Wrench	HHWRNCH

\*IM4LED is available only through ADC network.  
Must be purchased using a dealer appliance account.  
\*\*New part number in 2020  
Citrusline is a trademark of Bryson Industries, Inc. Cerama Bryte is a registered trademark of Cerama Bryte, Inc.


**WARRANTY INFORMATION**  
All parts and accessories have a limited one-year warranty, with the exception of water filters, which have a 30-day warranty.  
**LIMITED ONE-YEAR WARRANTY**  
If your GE part fails because of a manufacturing defect within one year from the date of original purchase, we will provide a new or, at our option, rebuilt part without charge. Return the defective part to the vendor from whom it was purchased with a copy of the "proof of purchase." If the part is defective and shows no signs of abuse, it will be exchanged.  
This warranty does not cover the failure of parts which are damaged while in your possession, are abused, or have been installed improperly. It does not cover the cost of returning the part to the vendor from whom it was purchased nor does it cover the cost of labor to remove or install it to diagnose the fault. It does not cover parts used in products in commercial use except in the case of air conditioning equipment. In no event shall GE Appliances be liable for consequential damage.  
**EXCLUSION OF IMPLIED WARRANTIES:**  
Your sole and exclusive remedy is part exchange as provided in this Limited Warranty. Any implied warranties, including the implied warranties of merchantability or fitness for a particular purpose, are limited to one year or the shortest period allowed by law.  
**Warrantor:** GE Appliances





YOUR TRUST  
IS OUR LEGACY

Once again, GE Appliances has been humbled by being voted the **#1 Most-Used Appliance Brand Among Builders** for both kitchens and laundry.\* We're honored by the recognition, and we can't wait to keep earning the trust of the building community into the future.

See how we go the extra mile for builders at [GEAppliances.com/pro](https://GEAppliances.com/pro).



**GE APPLIANCES**  
*a Haier company*



**C A F É**

**Haier**

**Hotpoint.**

**Profile**





**WASHER:**  
GEW850SPNDG (pg. 168)

**DRYER:**  
GFD85ESPNDG (pg. 168)

THE FIRST & ONLY  
**ULTRAFRESH VENT SYSTEM WITH**  
**ODORBLOCK™**

Shut the door on front loader odor thanks to the first and only front load washer with vents and antimicrobial technology. This revolutionary system helps prevent the growth of odor-causing bacteria. It's a design that's so fresh, it's getting loads of attention from the industry's most trustworthy names.

Take a closer look at [GEAppliances.com](http://GEAppliances.com)



good things, for life.



**GE APPLIANCES**

Appliance Park  
Louisville, KY 40225  
[geappliances.com](http://geappliances.com)  
Pub. No 1-G0100 PC94999

GE is a trademark of the General Electric Company. Manufactured under trademark license.

GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

